

任丘市埃勒森焊接科技有限公司

Renqiu Ailesen Welding Technology Co., Ltd.

AILESEN WELDING SUPPLY SOLUTION

焊接与切割产品专业供应方案

MIG/MAG | TIG | MMA | Plasma Cutting | OEM Welding Accessories

Structured RFQ support for overseas industrial buyers

Torch Consumables

Cutting Consumables

Welding Accessories

OEM RFQ Support



Contact: Liang Chenhui

Mobile: +86-18803076512 WhatsApp: +86-18803076512 Mobile: +86-15532859812

E-mail: arcfortweld@outlook.com Website: www.arcfortweld.com

Address: Renqiu City, Cangzhou, Hebei Province, China

地址: 河北省沧州市任丘市

Professional B2B Welding Supply

Specifications confirmed by RFQ, drawing, or sample

本公司专属方案

AILESEN WELDING & CUTTING SUPPLY SOLUTION

Renqiu Ailesen Welding Technology Co., Ltd. provides a B2B inquiry and supply plan for overseas welding product buyers. The catalog keeps product images and category references for sourcing discussions, while final specifications, compatibility, OEM numbers, certifications, MOQ, and lead time must be confirmed against the buyer's RFQ, drawings, samples, or approved order documents.

核心产品范围

CORE PRODUCT SCOPE

- Welding machines and cutting machines
- MIG/MAG torch parts: contact tip, nozzle, liner, diffuser
- TIG torch parts: gas lens, ceramic cup, collet body
- Plasma cutting consumables: electrode, nozzle, shield cap
- Wire feeder accessories and OEM welding accessories

询盘执行流程

RFQ WORKFLOW

1. Confirm product category, SKU, photos, drawings, or samples.
2. Review compatibility and OEM marking only after buyer confirmation.
3. Quote with confirmed data; uncertain fields remain TBD.
4. Confirm packaging, MOQ, lead time, and shipping details before order.
5. Provide export support documents available upon request.

数据合规说明

DATA INTEGRITY NOTICE

No unverified certification, price, exact rating, factory capacity, customer case, OEM number, or compatible model is claimed in this company version. Missing or unconfirmed data should be marked as Available upon request, TBD, unknown, or needs_review.

联系方式

CONTACT

Contact: Liang Chenhui
Mobile: +86-18803076512
WhatsApp: +86-18803076512
Mobile: +86-15532859812
E-mail: arcfortweld@outlook.com
Website: www.arcfortweld.com
Address: Renqiu City, Cangzhou, Hebei Province, China

目录 CONTENTS

MIG/MAG 二氧化碳焊枪	14-49
ORK15AK Air Valve MIG/MAG Welding Torch	14
ORK 15AK Air Cooled MIG/MAG Welding Torch	16
ORK 24KD Air Cooled MIG/MAG Welding Torch	18
ORK 25AK Air Cooled MIG/MAG Welding Torch	20
ORK 36KD Air Cooled MIG/MAG Welding Torch	22
ORK 40KD Air Cooled MIG/MAG Welding Torch	24
ORK 501D Water Cooled MIG/MAG Welding Torch	26
ORK 602 Water Cooled MIG/MAG Welding Torch	28
ORK 200A Air Cooled MIG/MAG Welding Torch	30
ORK 350A Air Cooled MIG/MAG Welding Torch	32
ORK 500A Air Cooled MIG/MAG Welding Torch	34
ORK KH600A Water Cooled MIG/MAG Welding Torch	36
ORK automatic elding Torches 自动焊枪	38
ORK PSF 250/305/405/505 Air Cooled MIG/MAG Welding Torch	39
ORK Spool200A 拉丝焊枪	41
Compatible arts 兼容配件	42
Optional Ce tral Connectors 可选焊枪接口形式	48
Other Accessories 其他配件	49
Plasma 等离子割枪	74-79
ORK P80	74
ORK SP-60/LD PT-31/LD A-81/LD CB-50	76
ORK LT-50/LD TongChang 60/LD AG-60/LD SG-51	78
TIG 氩弧焊枪	50-67
9 Series Air Cooled TIG Torches	50
17 Series Air Cooled TIG Torches	52
18 Series Water Cooled TIG Torches	54
20 Series Water Cooled TIG Torches	56
26 Series Air Cooled TIG Torches	58
27 Series Water Cooled TIG Torches	60
Othe TIG Torches 其他型号氩弧焊枪	61
Ceramic Nozzles 瓷嘴	62
Collets, Collet Bodies&Gas Lenses 钨极夹, 连接杆及气筛	64
Back Cap& Valve Stems 后帽及阀杆	66
Normal Torch Terminations 常规焊枪接口	67

Carbon Arc Gouging 碳弧气刨枪	80
Wire Feeder 送丝机构纯正部件	88-89
Wire Feeders 送丝机	88
Genuine Parts For Wire Feeder 送丝机构纯正部件	92
Wire Rollers 送丝轮	96
Uners 送丝软管	82-86
Robot 机器人焊枪	1-13
RobotWelding Torches	
Plug Socket And Coupler For Welding Machine 电焊机用插头、插座耦合器	102
Electric Welding 电焊钳	105
Earth Clamp 地线夹	107
Other Accessories 其他配件	108
Car Special Spot Welding Electrode And Accessories 汽车专用电焊电极及配件	109

Compatible torch and Parts For Panasonic
ORK 200A Air Cooled MIG/MAG Welding Torch
枪与配件适用于松下
ORK 200A气体保护焊枪



技术参数 Technical Data		
额定值 Rating : 200A CO ₂ /160A Mixed Gases 混合气体 暂载率 Duty Cycle : 60% 焊丝直径 Wire Size : 0.8-1.2 mm		
NO.	描述	Description
	ORK 200A 整枪 3 米	ORK 200A Complete Torch 3M
	ORK 200A 整枪 5 米	ORK 200A Complete Torch 5M
1	喷嘴 Φ13mm	Nozzle Φ13mm
2	M6 *45 *0.8 导电嘴, 紫铜	M6 *45 *0.8 Contact Tip , E-Cu
	M6 *45 *0.9 导电嘴, 紫铜	M6 *45 *0.9 Contact Tip , E-Cu
	M6 *45 *1.0 导电嘴, 紫铜	M6 *45 *1.0 Contact Tip , E-Cu
	M6 *45 *1.2 导电嘴, 紫铜	M6 *45 *1.2 Contact Tip , E-Cu
	M6 *45 *0.8 导电嘴, 铬锆铜	M6 *45 *0.8 Contact Tip , CuCrZr
	M6 *45 *0.9 导电嘴, 铬锆铜	M6 *45 *0.9 Contact Tip , CuCrZr
	M6 *45 *1.0 导电嘴, 铬锆铜	M6 *45 *1.0 Contact Tip , CuCrZr
	M6 *45 *1.2 导电嘴, 铬锆铜	M6 *45 *1.2 Contact Tip , CuCrZr
3	连接杆	Contact Tip Holder
4	分体弯管	Swan Neck Separable

NO.	描述	Description
5	尾部电缆保护弹簧	Black Cable Support Spring
6	后把壳	Rear Handle
7	二芯控制插头	Control Lead Plug
8	螺母 9/16-18UNF	Nut 9/16-18UNF
9	送丝软管, 适用焊丝 Φ0.8-1.0 , 3.5 米	Liner,For wire Φ0.8-1.0 , 3.5M
	送丝软管, 适用焊丝 Φ0.8-1.0 , 5.5 米	Liner,For wire Φ0.8-1.0 , 5.5M

易损件 Wear Parts

喷嘴 Nozzle	
--------------	--

描述	Description
喷嘴 Φ13mm	Cylindrical Nozzle Φ13mm

导电嘴 Contact Tip	
--------------------	--

描述	Description
M6 *45 *0.8 导电嘴, 紫铜	M6 *45 *0.8 Contact Tip , E-Cu
M6 *45 *0.9 导电嘴, 紫铜	M6 *45 *0.9 Contact Tip , E-Cu
M6 *45 *1.0 导电嘴, 紫铜	M6 *45 *1.0 Contact Tip , E-Cu
M6 *45 *1.2 导电嘴, 紫铜	M6 *45 *1.2 Contact Tip , E-Cu
M6 *45 *0.8 导电嘴, 铬锆铜	M6 *45 *0.8 Contact Tip , CuCrZr
M6 *45 *0.9 导电嘴, 铬锆铜	M6 *45 *0.9 Contact Tip , CuCrZr
M6 *45 *1.0 导电嘴, 铬锆铜	M6 *45 *1.0 Contact Tip , CuCrZr
M6 *45 *1.2 导电嘴, 铬锆铜	M6 *45 *1.2 Contact Tip , CuCrZr


连接杆 Contac Tip Holder		
--------------------------	--	--

描述	Description
连接杆, 外丝	Contact Tip Holder , Screw Outside
连接杆, 内丝	Contact Tip Holder , Screw Inside

分体弯管 Separable Swan Neck		一体弯管 Swan Neck	
-----------------------------	--	-------------------	--

描述	Description	描述	Description
分体弯管 M10	Separable Swan Neck M10	一体弯管	Swan Neck
分体弯管 M10 *1	Separable Swan Neck M10 *1		

Compatible torch and Parts For Panasonic
ORK 350A Air Cooled MIG/MAG Welding Torch
枪与配件适用于松下
ORK 350A气体保护焊枪

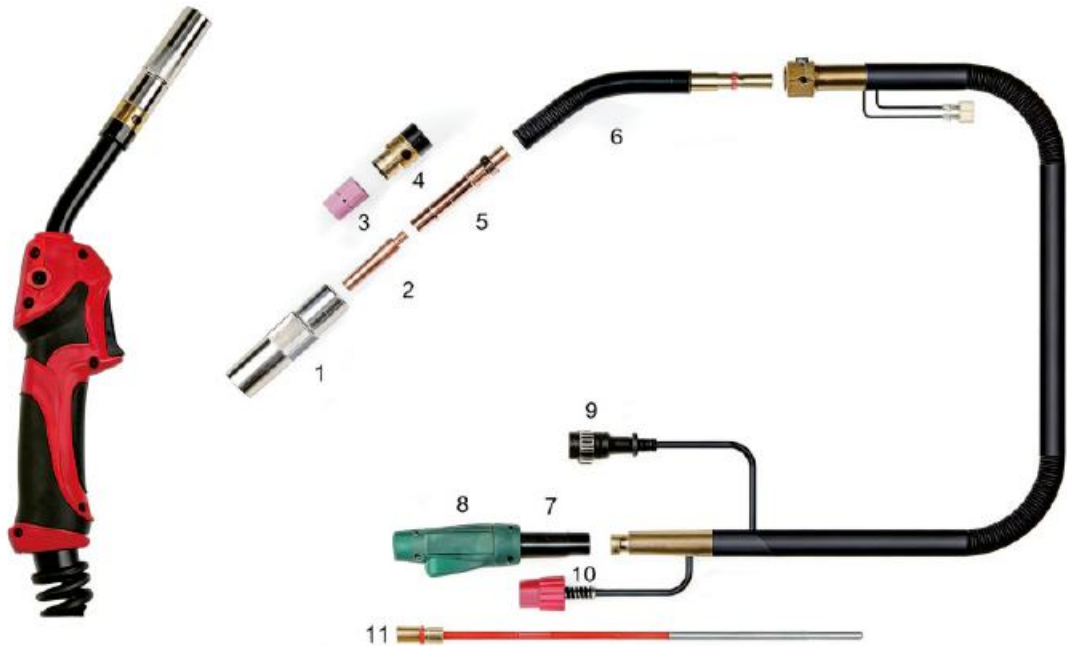


技术参数 Technical Data		
额定值 Rating : 350A CO ₂ / 300A Mixed Gases 混合气体 暂载率 Duty Cycle : 60% 焊丝直径 Wire Size : 0.9-1.2 mm		
NO.	描述	Description
	ORK 350A 整枪 3米	ORK 350A Complete Torch 3M
	ORK 350A 整枪 5米	ORK 350A Complete Torch 5M
1	柱形喷嘴 Φ15mm	Cylindrical Nozzle Φ15mm
	锥形喷嘴 Φ11.5mm	Conical Nozzle Φ11.5mm
2	M6 *45 *0.9 导电嘴, 紫铜	M6 *45 *0.9 Contact Tip , E-Cu
	M6 *45 *1.0 导电嘴, 紫铜	M6 *45 *1.0 Contact Tip , E-Cu
	M6 *45 *1.2 导电嘴, 紫铜	M6 *45 *1.2 Contact Tip , E-Cu
	M6 *45 *0.9 导电嘴, 铬锆铜	M6 *45 *0.9 Contact Tip , CuCrZr
	M6 *45 *1.0 导电嘴, 铬锆铜	M6 *45 *1.0 Contact Tip , CuCrZr
	M6 *45 *1.2 导电嘴, 铬锆铜	M6 *45 *1.2 Contact Tip , CuCrZr
3	分流器	Gas Diffuser
4	绝缘套	Insulator
5	连接杆	Contact Tip Holder
6	分体弯管	Swan Neck Separable
7	尾部电缆保护弹簧	Black Cable Support Spring
8	后把壳	Rear Handle

NO.	描述	Description
9	二芯控制插头	Control Lead Plug
10	螺母 9/16-18UNF	Nut 9/16-18UNF
11	送丝软管, 适用焊丝 Φ1.0-1.2 , 3.5米	Liner,For wire Φ1.0-1.2 , 3.5M
	送丝软管, 适用焊丝 Φ1.0-1.2 , 5.5米	Liner,For wire Φ1.0-1.2 , 5.5M

易损件 Wear Parts			
喷嘴 Nozzle		分流器 Gas Diffuser	
描述	Description	描述	Description
喷嘴 Φ13mm	Nozzle Φ13mm	分流器 陶瓷	Gas Diffuser Ceramic


导电嘴 Contact Tip	
描述	Description
M6 *45 *0.9 导电嘴, 紫铜	M6 *45 *0.9 Contact Tip , E-Cu
M6 *45 *1.0 导电嘴, 紫铜	M6 *45 *1.0 Contact Tip , E-Cu
M6 *45 *1.2 导电嘴, 紫铜	M6 *45 *1.2 Contact Tip , E-Cu
M6 *45 *0.9 导电嘴, 铬锆铜	M6 *45 *0.9 Contact Tip , CuCrZr
M6 *45 *1.0 导电嘴, 铬锆铜	M6 *45 *1.0 Contact Tip , CuCrZr
M6 *45 *1.2 导电嘴, 铬锆铜	M6 *45 *1.2 Contact Tip , CuCrZr

绝缘套 Insulator		
描述	Description	
绝缘套, 黑色	Insulator , Black	
绝缘套, 黄色	Insulator , Yellow	

连接杆 Contac Tip Holder		
描述	Description	
连接杆, 外丝	Contact Tip Holder	Screw Outside
连接杆, 内丝	Contact Tip Holder	Screw Inside

分体弯管 Separable Swan Neck		一体弯管 Swan Neck	
描述	Description	描述	Description
分体弯管	Separable Swan Neck	一体弯管	Swan Neck

Compatible torch and Parts For Panasonic
ORK 500A Air Cooled MIG/MAG Welding Torch
枪与配件适用于松下
ORK 500A气体保护焊枪

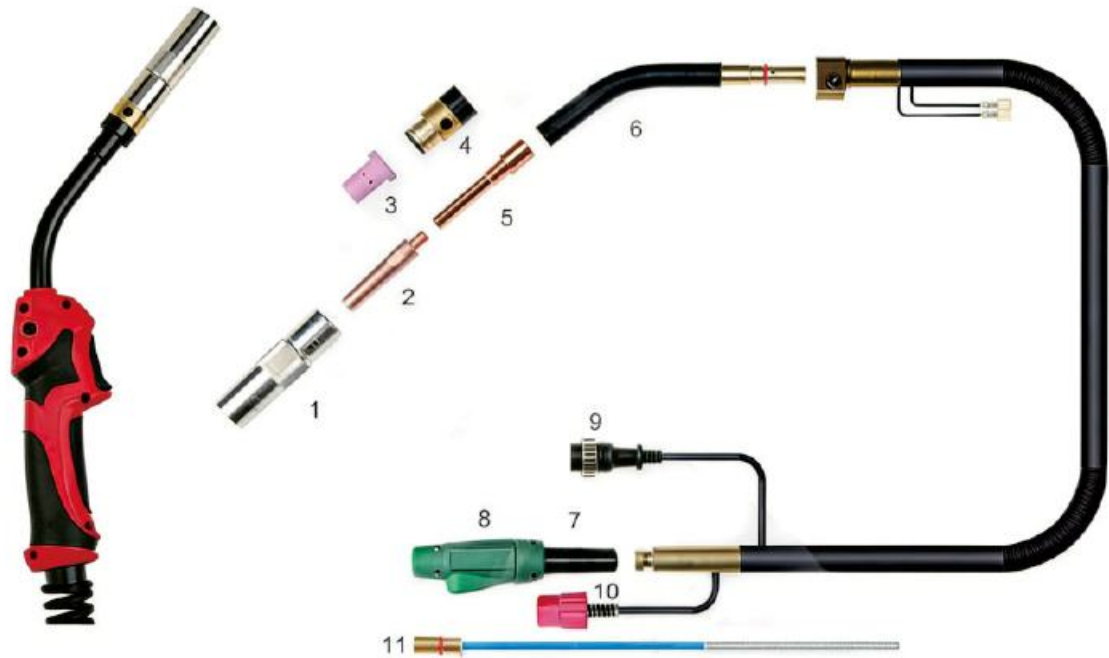

技术参数 Technical Data		
额定值 Rating : 350A CO ₂ / 300A Mixed Gases 混合气体 暂载率 Duty Cycle : 60% 焊丝直径 Wire Size : 0.9-1.2 mm		
NO.	描述	Description
	ORK 500A 整枪 3米	ORK 500A Complete Torch 3M
	ORK 500A 整枪 5米	ORK 500A Complete Torch 5M
1	柱形喷嘴 Φ18.7mm	Cylindrical Nozzle Φ18.7mm
	锥形喷嘴 Φ14mm	Conical Nozzle Φ14mm
2	M6 *45 *1.0 导电嘴, 紫铜	M6 *45 *1.0 Contact Tip , E-Cu
	M6 *45 *1.2 导电嘴, 紫铜	M6 *45 *1.2 Contact Tip , E-Cu
	M6 *45 *1.6 导电嘴, 紫铜	M6 *45 *1.6 Contact Tip , E-Cu
	M6 *45 *1.0 导电嘴, 铬锆铜	M6 *45 *1.0 Contact Tip , CuCrZr
	M6 *45 *1.2 导电嘴, 铬锆铜	M6 *45 *1.2 Contact Tip , CuCrZr
	M6 *45 *1.6 导电嘴, 铬锆铜	M6 *45 *1.6 Contact Tip , CuCrZr
3	分流器	Gas Diffuser
4	绝缘套	Insulator
5	连接杆	Contact Tip Holder
6	分体弯管	Swan Neck Separable
7	尾部电缆保护弹簧	Black Cable Support Spring
8	后把壳	Rear Handle

NO.	描述	Description
9	二芯控制插头	Control Lead Plug
10	螺母 9/16-18UNF	Nut 9/16-18UNF
11	送丝软管, 适用焊丝 Φ1.2-1.6 , 3.5 米	Liner,For wire Φ1.2-1.6 , 3.5M
	送丝软管, 适用焊丝 Φ1.2-1.6 , 5.5 米	Liner,For wire Φ1.2-1.6 , 5.5M

易损件 Wear Parts			
喷嘴 Nozzle		分流器 Gas Diffuser	
描述	Description	描述	Description
柱形喷嘴 Φ20mm	Cylindrical Nozzle Φ20mm	分流器 陶瓷	Gas Diffuser Ceramic
锥形喷嘴 Φ14mm	Conical Nozzle Φ14mm		


导电嘴 Contact Tip	
描述	Description
M6 *45 *1.0 导电嘴, 紫铜	M6 *45 *1.0 Contact Tip , E-Cu
M6 *45 *1.2 导电嘴, 紫铜	M6 *45 *1.2 Contact Tip , E-Cu
M6 *45 *1.6 导电嘴, 紫铜	M6 *45 *1.6 Contact Tip , E-Cu
M6 *45 *1.0 导电嘴, 铬锆铜	M6 *45 *1.0 Contact Tip , CuCrZr
M6 *45 *1.2 导电嘴, 铬锆铜	M6 *45 *1.2 Contact Tip , CuCrZr
M6 *45 *1.6 导电嘴, 铬锆铜	M6 *45 *1.6 Contact Tip , CuCrZr

绝缘套 Insulator		
描述		Description
绝缘套, 黑色		Insulator , Black
绝缘套, 黄色		Insulator , Yellow

连接杆 Contact Tip Holder		
描述	Description	
连接杆, 外丝	Contact Tip Holder	Screw Outside
连接杆, 内丝	Contact Tip Holder	Screw Inside

分体弯管 Separable Swan Neck		一体弯管 Swan Neck	
描述	Description	描述	Description
分体弯管	Separable Swan Neck	一体弯管	Swan Neck

Compatible orch and Parts For BINZEL
ORK 15Ak Air Valve MIG/MAG Welding Torch
枪与配件适用于宾采尔
ORK 15AK气阀气体保护焊枪

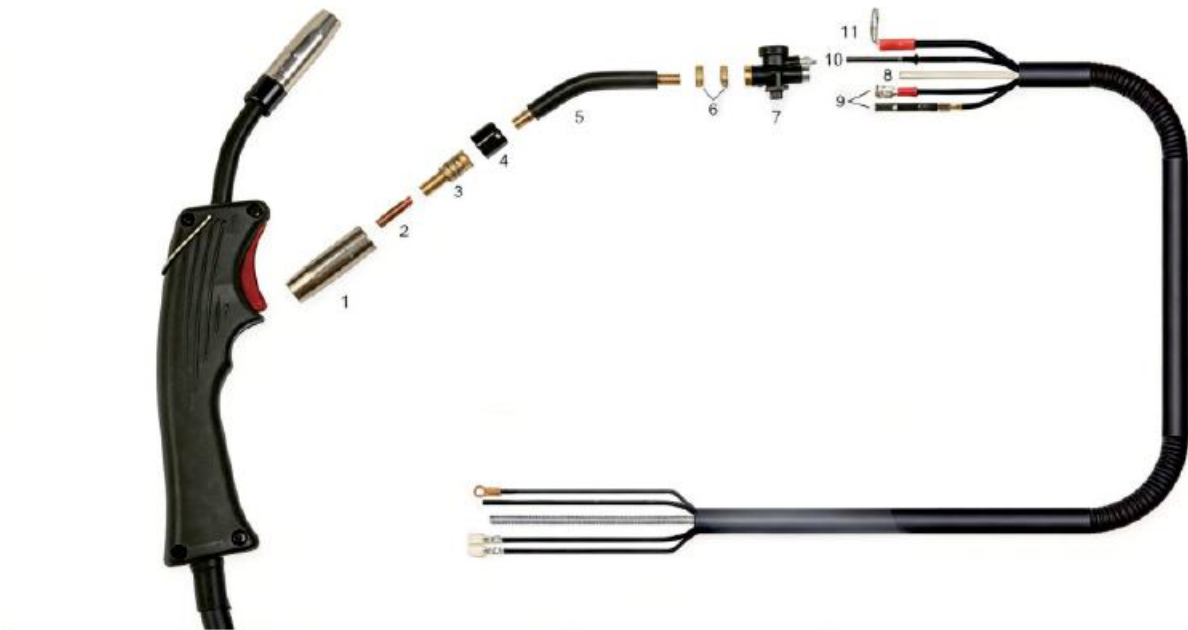

技术参数 Technical Data		
额定值 Rating：100A CO ₂ /100A Mixed Gases 混合气体 暂载率 Duty Cycle：35% 焊丝直径 Wire Size：0.6-1.0mm		
NO.	描述	Description
1	ORK 15AK 气阀焊枪 2.5 米	ORK 15AK Air Valve Torch 2.5M
	ORK 15AK 气阀整枪 3 米	ORK 15AK Air Valve Torch 3M
	柱形喷嘴 Φ16mm	Cylindrical Nozzle Φ16mm
2	锥形喷嘴 Φ12mm	Conical Nozzle Φ12mm
	尖形喷嘴 Φ9.5mm	Tapered Nozzle Φ9.5mm
	M6 *25 *0.6 导电嘴, 紫铜	M6 *25 *0.6 Contact Tip , E-Cu
	M6 *25 *0.8 导电嘴, 紫铜	M6 *25 *0.8 Contact Tip , E-Cu
	M6 *25 *0.9 导电嘴, 紫铜	M6 *25 *0.9 Contact Tip , E-Cu
3	M6 *25 *1.0 导电嘴, 紫铜	M6 *25 *1.0 Contact Tip , E-Cu
	M6 *25 *0.6 导电嘴, 铬锆铜	M6 *25 *0.6 Contact Tip , CuCrZr
	M6 *25 *0.8 导电嘴, 铬锆铜	M6 *25 *0.8 Contact Tip , CuCrZr
	M6 *25 *1.0 导电嘴, 铬锆铜	M6 *25 *1.0 Contact Tip , CuCrZr
	连接杆	Contact Tip Holder

NO.	描述	Description
4	绝缘套	Insulator
5	弯管	Swan Neck
6	六角螺母 M8	Hexagon Nut M8
7	气阀	Air Valve
8	气管	The Trachea
9	开关线	Switch Line
10	送丝软管, 适用焊丝 Φ0.6-1.0 , 2.5 米	Liner,For wire Φ0.6-1.0 , 2.5M
11	送丝软管, 适用焊丝 Φ0.6-1.0 , 3 米	Liner,For wire Φ0.6-1.0 , 3M
	电缆 2.5 米	Cable 2.5M
	电缆 3 米	Cable 3M


易损件 Wear Parts



描述	Description
柱形喷嘴 Φ16mm	Cylindrical Nozzle Φ16mm
锥形喷嘴 Φ12mm	Conical Nozzle Φ12mm
尖形喷嘴 Φ9.5mm	Tapered Nozzle Φ9.5mm



描述	Description
M6 *25 *0.6 导电嘴, 紫铜	M6 *25 *0.6 Contact Tip , E-Cu
M6 *25 *0.8 导电嘴, 紫铜	M6 *25 *0.8 Contact Tip , E-Cu
M6 *25 *0.9 导电嘴, 紫铜	M6 *25 *0.9 Contact Tip , E-Cu
M6 *25 *1.0 导电嘴, 紫铜	M6 *25 *1.0 Contact Tip , E-Cu
M6 *25 *0.6 导电嘴, 铬锆铜	M6 *25 *0.6 Contact Tip , CuCrZr
M6 *25 *0.8 导电嘴, 铬锆铜	M6 *25 *0.8 Contact Tip , CuCrZr
M6 *25 *1.0 导电嘴, 铬锆铜	M6 *25 *1.0 Contact Tip , CuCrZr



描述	Description
连接杆	Contact Tip Holder

Compatible torch and Parts For BINZEL
ORK 15Ak Air Cooled MIG/MAG Welding Torch
枪与配件适用于宾采尔
ORK 15AK气体保护焊枪



技术参数 Technical Data		
额定值 Rating : 180A CO ₂ /150A Mixed Gases 混合气体 暂载率 Duty Cycle : 60% 焊丝直径 Wire Size : 0.6-1.0mm		
NO.	描述	Description
	ORK 15AK 整枪 2.5 米	ORK 15AK Complete Torch 2.5M
	ORK 15AK 整枪 3 米	ORK 15AK Complete Torch 3M
1	柱形喷嘴 Φ16mm	Cylindrical Nozzle Φ16mm
	锥形喷嘴 Φ12mm	Conical Nozzle Φ12mm
	尖形喷嘴 Φ9.5mm	Tapered Nozzle Φ9.5mm
2	M6 *25 *0.6 导电嘴, 紫铜	M6 *25 *0.6 Contact Tip , E-Cu
	M6 *25 *0.8 导电嘴, 紫铜	M6 *25 *0.8 Contact Tip , E-Cu
	M6 *25 *0.9 导电嘴, 紫铜	M6 *25 *0.9 Contact Tip , E-Cu
	M6 *25 *1.0 导电嘴, 紫铜	M6 *25 *1.0 Contact Tip , E-Cu
	M6 *25 *0.6 导电嘴, 铬锆铜	M6 *25 *0.6 Contact Tip , CuCrZr
	M6 *25 *0.8 导电嘴, 铬锆铜	M6 *25 *0.8 Contact Tip , CuCrZr
3	M6 *25 *1.0 导电嘴, 铬锆铜	M6 *25 *1.0 Contact Tip , CuCrZr
	连接杆卡簧	Contact Tip Holder Spring

NO.	描述	Description
4	连接杆	Contact Tip Holder
5	绝缘筒	Insulator
6	弯管	Swan Neck
7	电缆支撑弹簧	Cable Support Spring
8	后把壳	Rear Handle
9	连接螺母	Adaptor Nut
10	欧式插头	Euro Connector
11	螺母 M10 *1	Nut M10 *1
12	送丝软管, 适用焊丝 Φ0.8-1.0 , 3.5 米	Liner,For wire Φ0.8-1.2 , 3.5M
	送丝软管, 适用焊丝 Φ0.8-1.0 , 5.5 米	Liner,For wire Φ0.8-1.2 , 5.5M

易损件 Wear Parts

喷嘴
Nozzle



描述	Description
柱形喷嘴 Φ16mm	Cylindrical Nozzle Φ16mm
锥形喷嘴 Φ12mm	Conical Nozzle Φ12mm
尖形喷嘴 Φ9.5mm	Tapered Nozzle Φ9.5mm

导电嘴
Contact Tip



描述	Description
M6 *25 *0.6 导电嘴, 紫铜	M6 *25 *0.6 Contact Tip , E-Cu
M6 *25 *0.8 导电嘴, 紫铜	M6 *25 *0.8 Contact Tip , E-Cu
M6 *25 *0.9 导电嘴, 紫铜	M6 *25 *0.9 Contact Tip , E-Cu
M6 *25 *1.0 导电嘴, 紫铜	M6 *25 *1.0 Contact Tip , E-Cu
M6 *25 *0.6 导电嘴, 铬锆铜	M6 *25 *0.6 Contact Tip , CuCrZr
M6 *25 *0.8 导电嘴, 铬锆铜	M6 *25 *0.8 Contact Tip , CuCrZr
M6 *25 *1.0 导电嘴, 铬锆铜	M6 *25 *1.0 Contact Tip , CuCrZr

连接杆
Contact Tip Holder




弯管
Swan Neck



描述	Description	描述	Description
连接杆	Contact Tip Holder	弯管	Swan Neck

Compatible torch and Parts For BINZEL
ORK 24KD Air Cooled MIG/MAG Welding Torch
与配件适用于宾采尔
ORK 24KD 气体保护焊枪

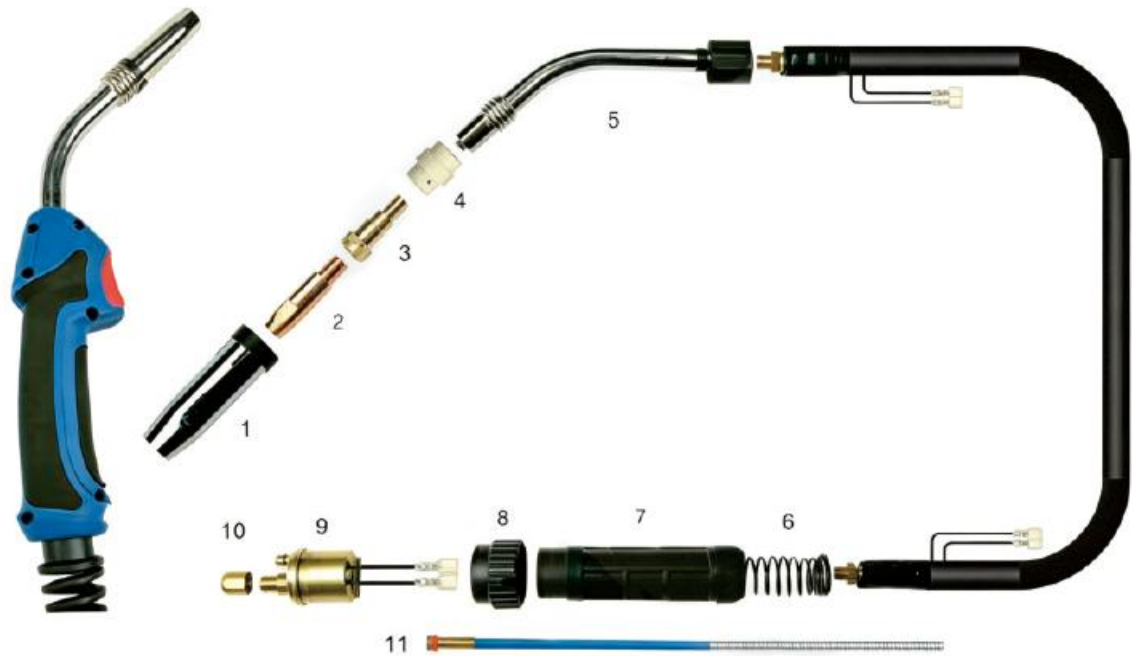

技术参数 Technical Data

额定值 Rating : 100A CO₂ /100A Mixed Gases 混合气体 暂载率 Duty Cycle : 35% 焊丝直径 Wire Size : 0.6-1.0mm


NO.	描述	Description
	ORK 24KD 整枪 3 米	ORK 24KD Complete Torch 3M
	ORK 24KD 整枪 5 米	ORK 24KD Complete Torch 5M
1	柱形喷嘴 Φ17mm 锥形喷嘴 Φ12.5mm 尖形喷嘴 Φ10mm	Cylindrical Nozzle Φ17mm Conical Nozzle Φ12.5mm Tapered Nozzle Φ10mm
2	M6 *28 *0.8 导电嘴, 紫铜 M6 *28 *0.9 导电嘴, 紫铜 M6 *28 *1.0 导电嘴, 紫铜 M6 *28 *1.2 导电嘴, 紫铜 M6 *28 *0.8 导电嘴, 铬锆铜 M6 *28 *1.0 导电嘴, 铬锆铜 M6 *28 *1.2 导电嘴, 铬锆铜	M6 *28 *0.8 Contact Tip , E-Cu M6 *28 *0.9 Contact Tip , E-Cu M6 *28 *1.0 Contact Tip , E-Cu M6 *28 *1.2 Contact Tip , E-Cu M6 *28 *0.8 Contact Tip , CuCrZr M6 *28 *1.0 Contact Tip , CuCrZr M6 *28 *1.2 Contact Tip , CuCrZr
3	连接杆	Contact Tip Holder

NO.	描述	Description
4	分流器	Gas Diffuser
5	弯管	Swan Neck
6	电缆支撑弹簧	Cable Support Spring
7	后把壳	Rear Handle
8	连接螺母	Adaptor Nut
9	欧式插头	Euro Connector
10	螺母 M10 *1	Nut M10 *1
11	送丝软管, 适用焊丝 Φ0.8-1.2 , 3.5 米 送丝软管, 适用焊丝 Φ0.8-1.2 , 5.5 米	Liner,For wire Φ0.8-1.2 , 3.5M Liner,For wire Φ0.8-1.2 , 5.5M

易损件 Wear Parts

喷嘴 Nozzle		分流器 Gas Diffuser	
柱形喷嘴 Φ17mm	Cylindrical Nozzle Φ17mm	分流器 DMC	Gas Diffuser DMC
锥形喷嘴 Φ12.5mm	Conical Nozzle Φ12.5mm	分流器 陶瓷	Gas Diffuser Ceramic
尖形喷嘴 Φ10mm	Tapered Nozzle Φ10mm		

导电嘴
Contact Tip



描述	Description
M6 *28 *0.8 导电嘴, 紫铜	M6 *28 *0.8 Contact Tip , E-Cu
M6 *28 *0.9 导电嘴, 紫铜	M6 *28 *0.9 Contact Tip , E-Cu
M6 *28 *1.0 导电嘴, 紫铜	M6 *28 *1.0 Contact Tip , E-Cu
M6 *28 *1.2 导电嘴, 紫铜	M6 *28 *1.2 Contact Tip , E-Cu
M6 *28 *0.8 导电嘴, 铬锆铜	M6 *28 *0.8 Contact Tip , CuCrZr
M6 *28 *1.0 导电嘴, 铬锆铜	M6 *28 *1.0 Contact Tip , CuCrZr
M6 *28 *1.2 导电嘴, 铬锆铜	M6 *28 *1.2 Contact Tip , CuCrZr

连接杆
Contact Tip Holder




弯管
Swan Neck



描述	Description	描述	Description
连接杆	Contact Tip Holder	弯管	Swan Neck

Compatible torch and Parts For BINZEL
ORK 25AK Air Cooled MIG/MAG Welding Torch
枪与配件适用于宾采尔
ORK 25AK 气体保护焊枪

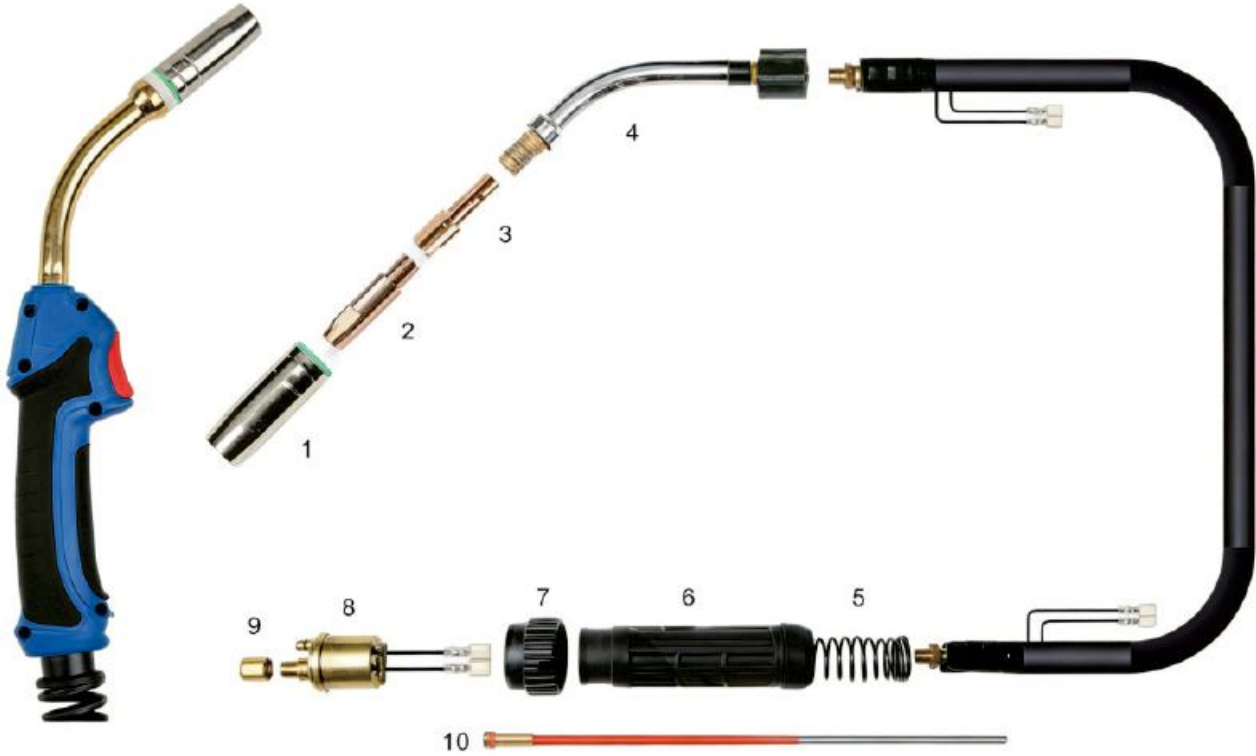

技术参数 Technical Data		
额定值 Rating : 100A CO ₂ / 100A Mixed Gases 混合气体 暂载率 Duty Cycle : 35% 焊丝直径 Wire Size : 0.6-1.0mm		
NO.	描述	Description
	ORK 25AK 整枪 3 米	ORK 25AK Complete Torch 3M
	ORK 25AK 整枪 5 米	ORK 25AK Complete Torch 5M
1	柱形喷嘴 Φ18mm	Cylindrical Nozzle Φ18mm
	锥形喷嘴 Φ15mm	Conical Nozzle Φ15mm
	尖形喷嘴 Φ11.5mm	Tapered Nozzle Φ11.5mm
2	M6 *28 *0.8 导电嘴, 紫铜	M6 *28 *0.8 Contact Tip , E-Cu
	M6 *28 *0.9 导电嘴, 紫铜	M6 *28 *0.9 Contact Tip , E-Cu
	M6 *28 *1.0 导电嘴, 紫铜	M6 *28 *1.0 Contact Tip , E-Cu
	M6 *28 *1.2 导电嘴, 紫铜	M6 *28 *1.2 Contact Tip , E-Cu
	M6 *28 *0.8 导电嘴, 铬锆铜	M6 *28 *0.8 Contact Tip , CuCrZr
	M6 *28 *1.0 导电嘴, 铬锆铜	M6 *28 *1.0 Contact Tip , CuCrZr
	M6 *28 *1.2 导电嘴, 铬锆铜	M6 *28 *1.2 Contact Tip , CuCrZr
3	连接杆	Contact Tip Holder

NO.	描述	Description
4	弯管	Swan Neck
5	电缆支撑弹簧	Cable Support Spring
6	后把壳	Rear Handle
7	连接螺母	Adaptor Nut
8	欧式插头	Euro Connector
9	螺母 M10 *1	Nut M10 *1
10	送丝软管, 适用焊丝 Φ0.8-1.0 , 3.5 米	Liner,For wire Φ0.8-1.0 , 3.5M
	送丝软管, 适用焊丝 Φ0.8-1.0 , 5.5 米	Liner,For wire Φ0.8-1.0 , 5.5M


易损件 Wear Parts

喷嘴
Nozzle




描述	Description
柱形喷嘴 Φ18mm	Cylindrical Nozzle Φ18mm
锥形喷嘴 Φ15mm	Conical Nozzle Φ15mm
尖形喷嘴 Φ11.5mm	Tapered Nozzle Φ11.5mm

导电嘴
Contact Tip



描述	Description
M6 *28 *0.8 导电嘴, 紫铜	M6 *28 *0.8 Contact Tip , E-Cu
M6 *28 *0.9 导电嘴, 紫铜	M6 *28 *0.9 Contact Tip , E-Cu
M6 *28 *1.0 导电嘴, 紫铜	M6 *28 *1.0 Contact Tip , E-Cu
M6 *28 *1.2 导电嘴, 紫铜	M6 *28 *1.2 Contact Tip , E-Cu
M6 *28 *0.8 导电嘴, 铬锆铜	M6 *28 *0.8 Contact Tip , CuCrZr
M6 *28 *1.0 导电嘴, 铬锆铜	M6 *28 *1.0 Contact Tip , CuCrZr
M6 *28 *1.2 导电嘴, 铬锆铜	M6 *28 *1.2 Contact Tip , CuCrZr

连接杆
Contact Tip Holder




弯管
Swan Neck



描述	Description	描述	Description
连接杆	Contact Tip Holder	弯管	Swan Neck

Compatible torch and Parts For BINZEL
ORK 36KD Air Cooled MIG/MAG Welding Torch
枪与配件适用于宾采尔
ORK 36KD气体保护焊枪

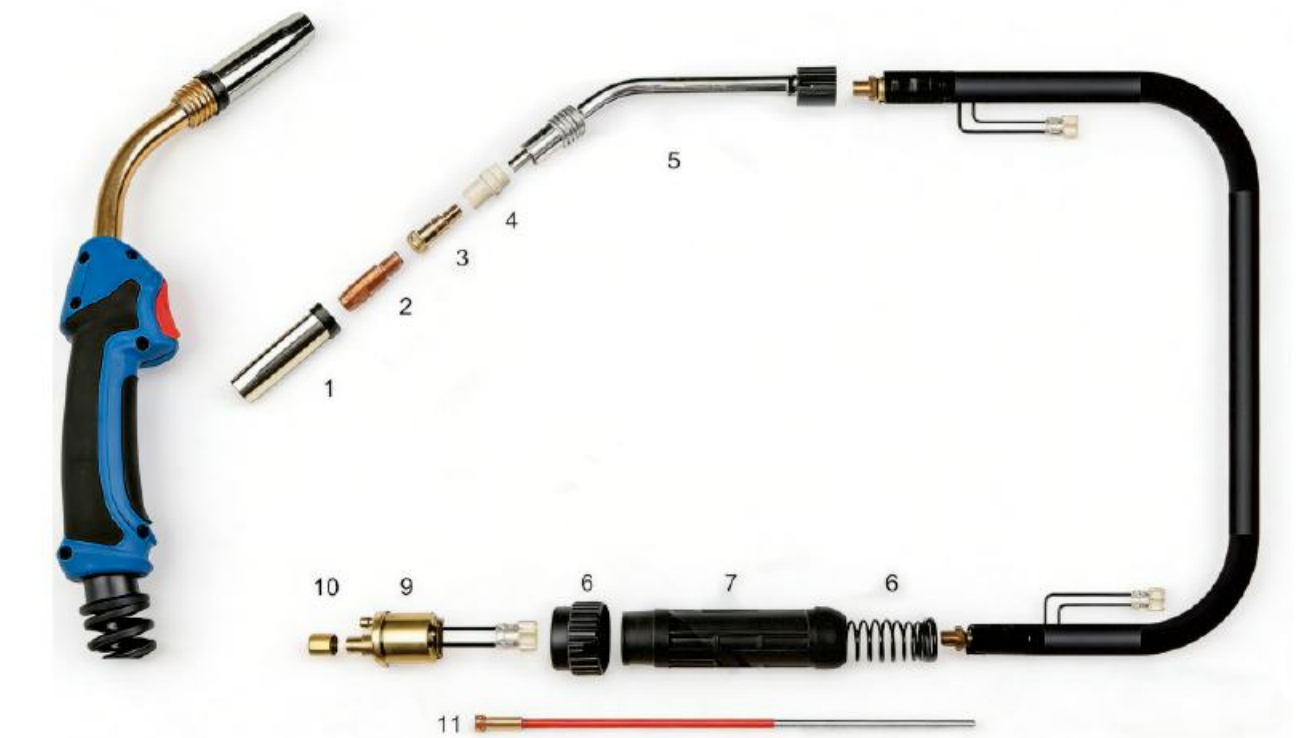


技术参数 Technical Data		
额定值 Rating : 340A CO ₂ / 320A Mixed Gases 混合气体 暂载率 Duty Cycle : 60% 焊丝直径 Wire Size : 0.8-1.2mm		
NO.	描述	Description
	ORK 36 KD 整枪 3 米	ORK 36KD Complete Torch 3M
	ORK 36 KD 整枪 5 米	ORK 36 KD Complete Torch 5M
1	柱形喷嘴 Φ19mm	Cylindrical Nozzle Φ 19mm
	锥形喷嘴 Φ16mm	Conical Nozzle Φ16mm
	尖形喷嘴 Φ12mm	Tapered Nozzle Φ 12mm
2	M8 *30 *0.8 导电嘴, 紫铜	M8 *30 *0.8 Contact Tip , E-Cu
	M8 *30 *1.0 导电嘴, 紫铜	M8 *30 *1.0 Contact Tip , E-Cu
	M8 *30 *1.2 导电嘴, 紫铜	M8 *30 *1.2 Contact Tip , E-Cu
	M8 *30 *0.8 导电嘴, 铬锆铜	M8 *30 *0.8 Contact Tip , CuCrZr
	M8 *30 *1.0 导电嘴, 铬锆铜	M8 *30 *1.0 Contact Tip , CuCrZr
	M8 *30 *1.2 导电嘴, 铬锆铜	M8 *30 *1.2 Contact Tip , CuCrZr
3	连接杆, M8 *25	Contact Tip Holder , M8 *25
	连接杆, M8 *28	Contact Tip Holder , M8 *28

NO.	描述	Description
	连接杆, M8 *34	Contact Tip Holder , M8 *34
4	分流器	Gas Diffuser
5	弯管	Swan Neck
6	电缆支撑弹簧	Cable Support Spring
7	后把壳	Rear Handle
8	连接螺母	Adaptor Nut
9	欧式插头	Euro Connector
10	螺母 M10 *1	Nut M10 *1
11	送丝软管, 适用焊丝 Φ0.8-1.2 , 3.5 米	Liner,For wire Φ0.8-1.2 , 3.5M
	送丝软管, 适用焊丝 Φ0.8-1.2 , 5.5 米	Liner,For wire Φ0.8-1.2 , 5.5M

易损件 Wear Parts



描述	Description	描述	Description
柱形喷嘴 Φ20mm	Cylindrical Nozzle Φ20mm	分流器 DMC	Gas Diffuser DMC
锥形喷嘴 Φ16mm	Conical Nozzle Φ16mm	分流器 陶瓷	Gas Diffuser Ceramic
尖形喷嘴 Φ12mm	Tapered Nozzle Φ12mm		




描述	Description
M8 *30 *0.8 导电嘴, 紫铜	M8 *30 *0.8 Contact Tip , E-Cu
M8 *30 *1.0 导电嘴, 紫铜	M8 *30 *1.0 Contact Tip , E-Cu
M8 *30 *1.2 导电嘴, 紫铜	M8 *30 *1.2 Contact Tip , E-Cu
M8 *30 *0.8 导电嘴, 铬锆铜	M8 *30 *0.8 Contact Tip , CuCrZr
M8 *30 *1.0 导电嘴, 铬锆铜	M8 *30 *1.0 Contact Tip , CuCrZr
M8 *30 *1.2 导电嘴, 铬锆铜	M8 *30 *1.2 Contact Tip , CuCrZr



描述	Description	描述	Description
连接杆, M8 *25	Contact Tip Holder , M8 *25	弯管	Swan Neck
连接杆, M8 *28	Contact Tip Holder , M8 *28		
连接杆, M8 *34	Contact Tip Holder , M8 *34		

Compatible torch and Parts For BINZEL
ORK 40KD Air Cooled MIG/MAG Welding Torch
枪与配件适用于宾采尔
ORK 40KD 气体保护焊枪

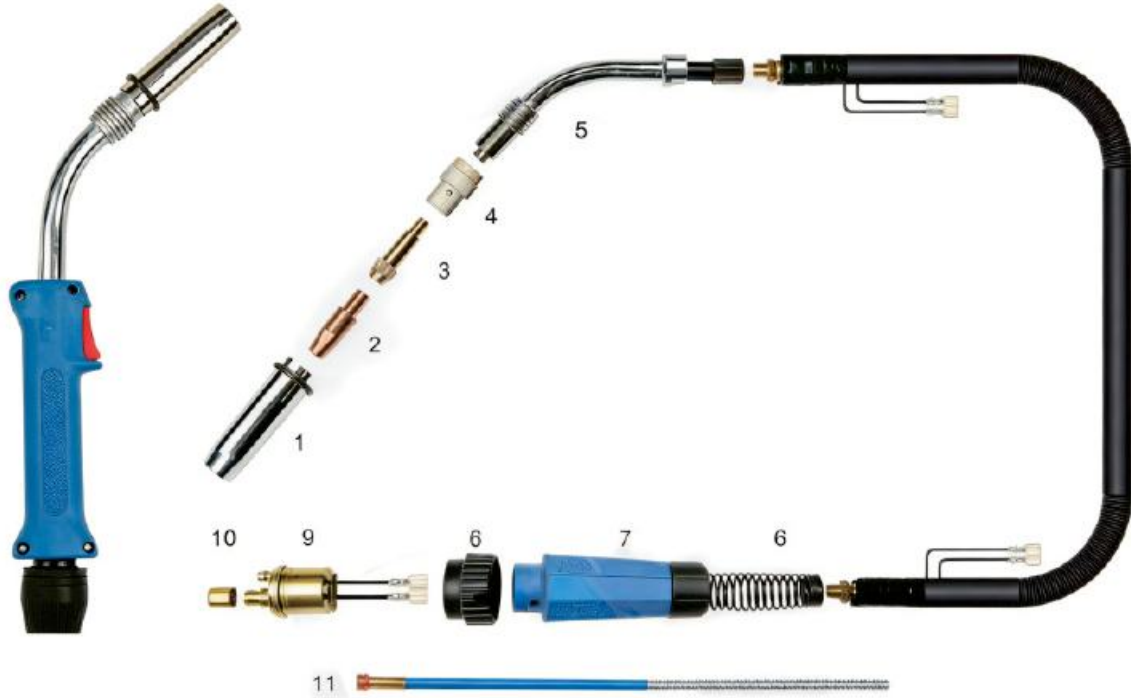

技术参数 Technical Data		
额定值 Rating : 380A CO ₂ /360A Mixed Gases 混合气体 暂载率 Duty Cycle : 60% 焊丝直径 Wire Size : 1.0-2.4mm		
NO.	描述	Description
	ORK 40 KD 整枪 3 米	ORK 40KD Complete Torch 3M
	ORK 40 KD 整枪 5 米	ORK 40 KD Complete Torch 5M
1	柱形喷嘴 Φ21mm	Cylindrical Nozzle Φ21mm
	锥形喷嘴 Φ18mm	Conical Nozzle Φ18mm
	尖形喷嘴 Φ14mm	Tapered Nozzle Φ14mm
2	M8 *30 *1.0 导电嘴, 紫铜	M8 *30 *1.0 Contact Tip , E-Cu
	M8 *30 *1.2 导电嘴, 紫铜	M8 *30 *1.2 Contact Tip , E-Cu
	M8 *30 *1.6 导电嘴, 紫铜	M8 *30 *1.6 Contact Tip , E-Cu
	M8 *30 *1.0 导电嘴, 铬锆铜	M8 *30 *1.0 Contact Tip , CuCrZr
	M8 *30 *1.2 导电嘴, 铬锆铜	M8 *30 *1.2 Contact Tip , CuCrZr
	M8 *30 *1.6 导电嘴, 铬锆铜	M8 *30 *1.6 Contact Tip , CuCrZr
	M8 *30 *2.0 导电嘴, 铬锆铜	M8 *30 *2.0 Contact Tip , CuCrZr
	M8 *30 *2.4 导电嘴, 铬锆铜	M8 *30 *2.4 Contact Tip , CuCrZr

NO.	描述	Description
3	连接杆, M8 *43	Contact Tip Holder , M8 *43
4	分流器	Gas Diffuser
5	弯管	Swan Neck
6	电缆支撑弹簧	Cable Support Spring
7	后把壳	Rear Handle
8	连接螺母	Adaptor Nut
9	欧式插头	Euro Connector
10	螺母 M10 *1	Nut M10 *1
11	送丝软管, 适用焊丝 Φ1.2-1.6 , 3.5 米	Liner,For wire Φ1.2-1.6 , 3.5M
	送丝软管, 适用焊丝 Φ1.2-1.6 , 5.5 米	Liner,For wire Φ1.2-1.6 , 5.5M

易损件 Wear Parts

描述	Description	描述	Description
柱形喷嘴 Φ21mm	Cylindrical Nozzle Φ21mm	分流器 DMC	Gas Diffuser DMC
锥形喷嘴 Φ18mm	Conical Nozzle Φ18mm	分流器 陶瓷	Gas Diffuser Ceramic
尖形喷嘴 Φ14mm	Tapered Nozzle Φ14mm		

导电嘴
Contact Tip



描述	Description
M8 *30 *1.0 导电嘴, 紫铜	M8 *30 *1.0 Contact Tip , E-Cu
M8 *30 *1.2 导电嘴, 紫铜	M8 *30 *1.2 Contact Tip , E-Cu
M8 *30 *1.6 导电嘴, 紫铜	M8 *30 *1.6 Contact Tip , E-Cu
M8 *30 *1.0 导电嘴, 铬锆铜	M8 *30 *1.0 Contact Tip , CuCrZr
M8 *30 *1.2 导电嘴, 铬锆铜	M8 *30 *1.2 Contact Tip , CuCrZr
M8 *30 *1.6 导电嘴, 铬锆铜	M8 *30 *1.6 Contact Tip , CuCrZr
M8 *30 *2.0 导电嘴, 铬锆铜	M8 *30 *2.0 Contact Tip , CuCrZr
M8 *30 *2.4 导电嘴, 铬锆铜	M8 *30 *2.4 Contact Tip , CuCrZr

连接杆
Contact Tip Holder




弯管
Swan Neck



描述	Description	描述	Description
连接杆, M8 *43	Contact Tip Holder , M8 *43	弯管	Swan Neck

Compatible torch and Parts For BINZEL
ORK 501D Water Cooled MIG/MAG Welding Torch
枪与配件适用于宾采尔
ORK 501D水冷保护焊枪

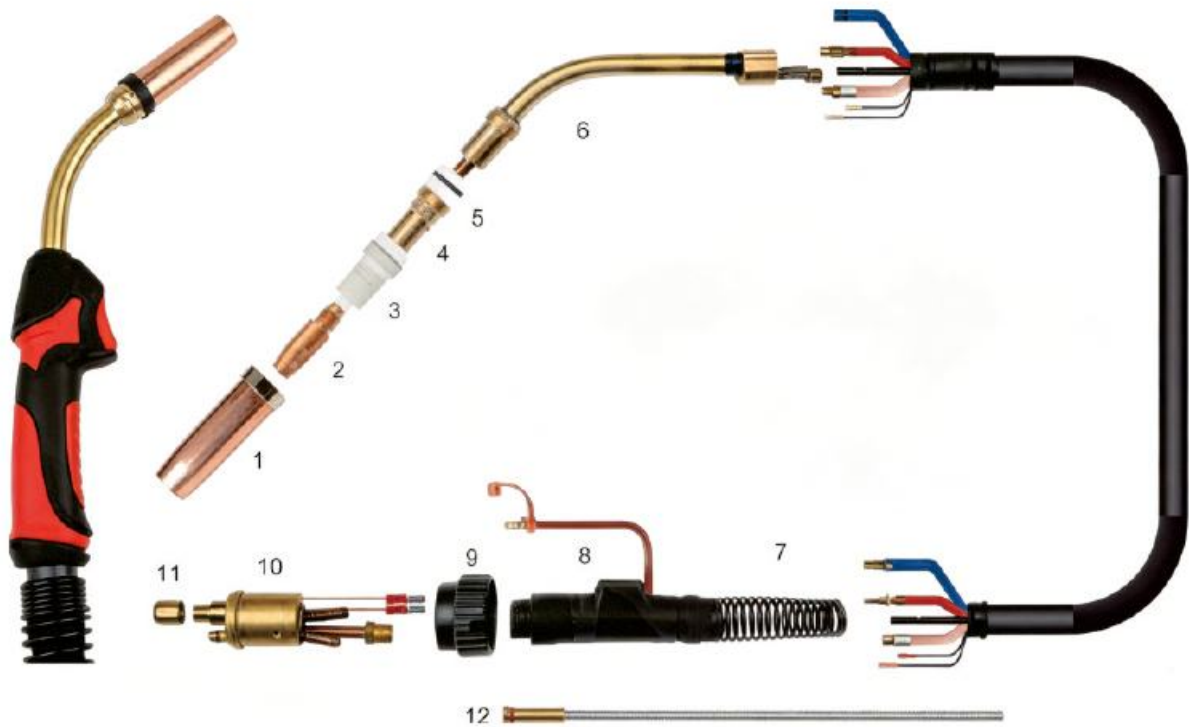

技术参数 Technical Data		
额定值 Rating : 380A CO ₂ /360A Mixed Gases 混合气体 暂载率 Duty Cycle : 60% 焊丝直径 Wire Size : 1.0-2.4mm		
NO.	描述	Description
1	ORK 501 D 整枪 3 米	ORK 501D Complete Torch 3M
	ORK 501 D 整枪 5 米	ORK 501 D Complete Torch 5M
	柱形喷嘴 Φ19mm	Cylindrical Nozzle Φ19mm
	锥形喷嘴 Φ16mm	Conical Nozzle Φ16mm
2	尖形喷嘴 Φ14mm	Tapered Nozzle Φ14mm
	M8 * 30 * 1.0 导电嘴, 紫铜	M8 * 30 * 1.0 Contact Tip , E-Cu
	M8 * 30 * 1.2 导电嘴, 紫铜	M8 * 30 * 1.2 Contact Tip , E-Cu
	M8 * 30 * 1.6 导电嘴, 紫铜	M8 * 30 * 1.6 Contact Tip , E-Cu
	M8 * 30 * 1.0 导电嘴, 铬锆铜	M8 * 30 * 1.0 Contact Tip , CuCrZr
	M8 * 30 * 1.2 导电嘴, 铬锆铜	M8 * 30 * 1.2 Contact Tip , CuCrZr
	M8 * 30 * 1.6 导电嘴, 铬锆铜	M8 * 30 * 1.6 Contact Tip , CuCrZr
	M8 * 30 * 2.4 导电嘴, 铬锆铜	M8 * 30 * 2.4 Contact Tip , CuCrZr
3	分流器	Gas Diffuser

NO.	描述	Description
4	连接杆, M8 * 25	Contact Tip Holder , M8 * 25
	连接杆, M8 * 29	Contact Tip Holder , M8 * 29
5	绝缘垫片	Insulator
6	弯管	Swan Neck
7	尾部电缆保护弹簧	Cable Support Spring
8	后把壳	Rear Handle
9	连接螺母	Adaptor Nut
10	欧式插头	Euro Connector
11	螺母 M10 * 1	Nut M10 * 1
12	送丝软管, 适用焊丝 Φ1.0-1.2 , 3.5 米	Liner,For wire Φ1.0-1.2 , 3.5M
	送丝软管, 适用焊丝 Φ1.0-1.2 , 5.5 米	Liner,For wire Φ1.0-1.2 , 5.5M

易损件 Wear Parts

喷嘴
Nozzle

描述

Description

柱形喷嘴 Φ20mm, 壁厚 2.0

Cylindrical Nozzle Φ20mm, Wall Thickness 2.0

锥形喷嘴 Φ16mm, 壁厚 2.0

Conical Nozzle Φ16mm, Wall Thickness 2.0

尖形喷嘴 Φ14mm, 壁厚 2.0

Tapered Nozzle Φ14mm, Wall Thickness 2.0

柱形喷嘴 Φ19mm, 壁厚 2.5

Cylindrical Nozzle Φ19mm, Wall Thickness 2.5

锥形喷嘴 Φ16mm, 壁厚 2.5

Conical Nozzle Φ16mm, Wall Thickness 2.5

尖形喷嘴 Φ14mm, 壁厚 2.5

Tapered Nozzle Φ14mm, Wall Thickness 2.5

导电嘴
Contact Tip

描述

Description

M8 * 30 * 1.0 导电嘴, 紫铜

M8 * 30 * 1.0 Contact Tip, E-Cu

M8 * 30 * 1.2 导电嘴, 紫铜

M8 * 30 * 1.2 Contact Tip, E-Cu

M8 * 30 * 1.6 导电嘴, 紫铜

M8 * 30 * 1.6 Contact Tip, E-Cu

M8 * 30 * 1.0 导电嘴, 铬锆铜

M8 * 30 * 1.0 Contact Tip, CuCrZr

M8 * 30 * 1.2 导电嘴, 铬锆铜

M8 * 30 * 1.2 Contact Tip, CuCrZr

M8 * 30 * 1.6 导电嘴, 铬锆铜

M8 * 30 * 1.6 Contact Tip, CuCrZr

M8 * 30 * 2.4 导电嘴, 铬锆铜

M8 * 30 * 2.4 Contact Tip, CuCrZr

分流器
Gas Diffuser

连接杆
Contact Tip Holder

弯管
Swan Neck

描述

Description

描述

Description


描述

Description

分流器 DMC Gas Diffuser DMC 连接杆, M8 * 25 Contact Tip Holder, M8 * 25 弯管 Swan Neck

分流器 陶瓷 Gas Diffuser Ceramic 连接杆, M8 * 29 Contact Tip Holder, M8 * 29

Compatible torch and Parts For BINZEL
ORK 501D Water Cooled MIG/MAG Welding Torch
枪与配件适用于宾采尔
ORK 501D水冷保护焊枪

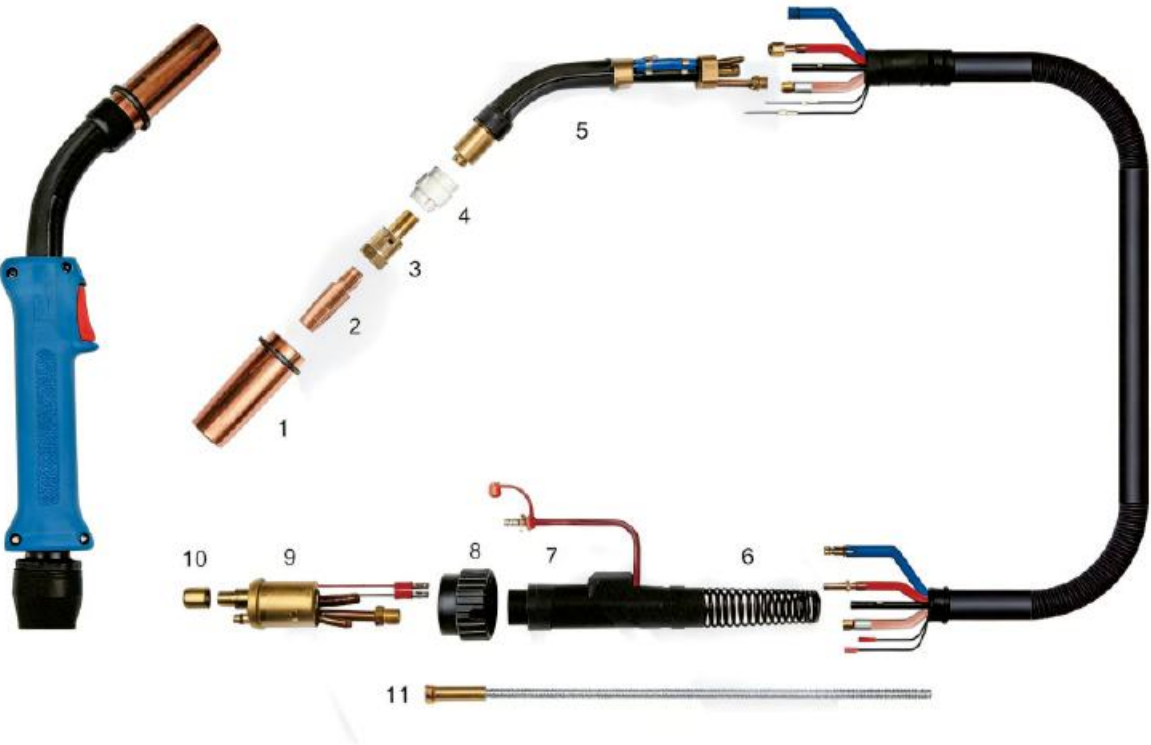

技术参数 Technical Data		
额定值 Rating : 600A CO ₂ /550A Mixed Gases 混合气体 暂载率 Duty Cycle : 100% 焊丝直径 Wire Size : 1.0-2.4mm		
NO.	描述	Description
	ORK 602 整枪 3 米	ORK 602 Complete Torch 3M
	ORK 602 整枪 5 米	ORK 602 Complete Torch 5M
1	喷嘴 Φ18mm	Nozzle Φ18mm
2	M8 *30 *1.0 导电嘴, 紫铜	M8 *30 *1.0 Contact Tip , E-Cu
	M8 *30 *1.2 导电嘴, 紫铜	M8 *30 *1.2 Contact Tip , E-Cu
	M8 *30 *1.6 导电嘴, 紫铜	M8 *30 *1.6 Contact Tip , E-Cu
	M8 *30 *1.0 导电嘴, 铬锆铜	M8 *30 *1.0 Contact Tip , CuCrZr
	M8 *30 *1.2 导电嘴, 铬锆铜	M8 *30 *1.2 Contact Tip , CuCrZr
	M8 *30 *1.6 导电嘴, 铬锆铜	M8 *30 *1.6 Contact Tip , CuCrZr
	M8 *30 *2.4 导电嘴, 铬锆铜	M8 *30 *2.4 Contact Tip , CuCrZr
3	连接杆, M8 *25.5	Contact Tip Holder , M8 *25.5
4	分流器	Gas Diffuser
5	弯管	Swan Neck

NO.	描述	Description
6	尾部电缆保护弹簧	Cable Support Spring
7	后把壳	Rear Handle
8	连接螺母	Adaptor Nut
9	中央插头	Central Connector
10	螺母 M10 *1	Nut M10 *1
11	送丝软管, 适用焊丝 Φ1.2-1.6 , 3.5 米	Liner,For wire Φ1.2-1.6 , 3.5M
	送丝软管, 适用焊丝 Φ1.2-1.6 , 5.5 米	Liner,For wire Φ1.2-1.6 , 5.5M


易损件 Wear Parts

描述	Description	描述	Description
喷嘴 Φ18mm	Nozzle Φ18mm	分流器 DMC	Gas Diffuser DMC
		分流器 陶瓷	Gas Diffuser Ceramic

描述	Description
M8 *30 *1.0 导电嘴, 紫铜	M8 *30 *1.0 Contact Tip , E-Cu
M8 *30 *1.2 导电嘴, 紫铜	M8 *30 *1.2 Contact Tip , E-Cu
M8 *30 *1.6 导电嘴, 紫铜	M8 *30 *1.6 Contact Tip , E-Cu
M8 *30 *1.0 导电嘴, 铬锆铜	M8 *30 *1.0 Contact Tip , CuCrZr
M8 *30 *1.2 导电嘴, 铬锆铜	M8 *30 *1.2 Contact Tip , CuCrZr
M8 *30 *1.6 导电嘴, 铬锆铜	M8 *30 *1.6 Contact Tip , CuCrZr
M8 *30 *2.4 导电嘴, 铬锆铜	M8 *30 *2.4 Contact Tip , CuCrZr

描述	Description	描述	Description
连接杆, M8 *25.5	Contact Tip Holder , M8 *25.5	弯管	Swan Neck

Compatible torch and Parts For Panasonic
ORK KH600A Water Cooled MIG/MAG Welding Torch
枪与配件适用于松下
ORK KH600A水冷保护焊枪

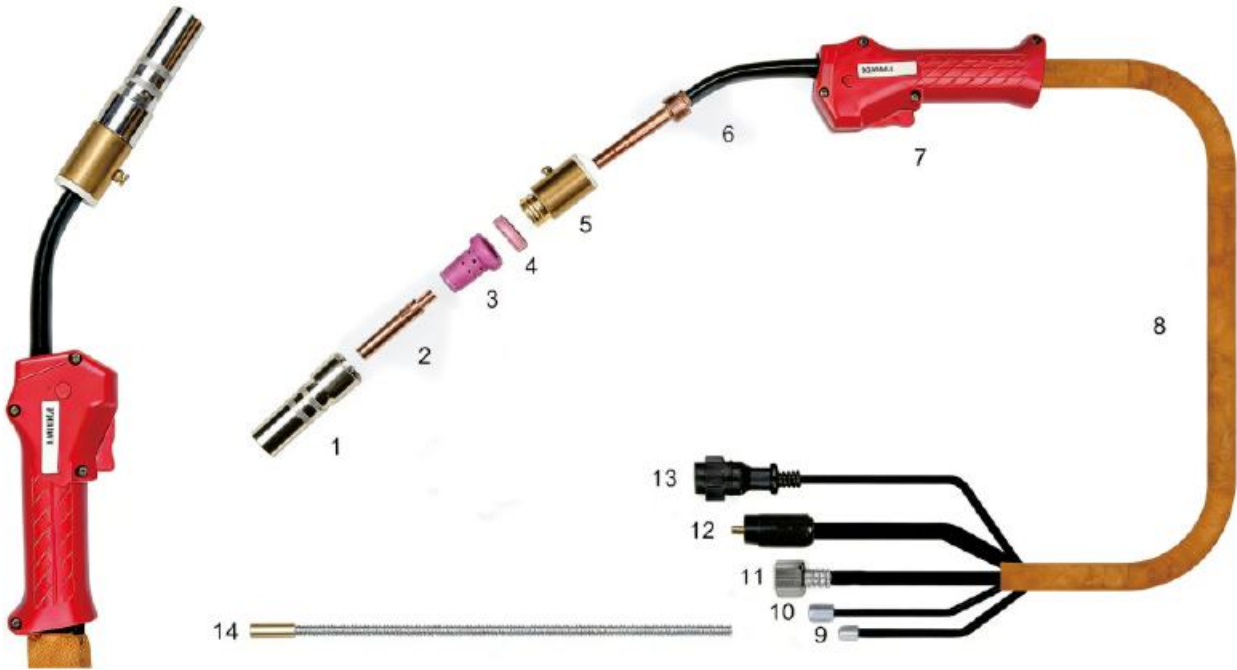

技术参数 Technical Data		
额定值 Rating : 350A CO ₂ / 300A Mixed Gases 混合气体 暂载率 Duty Cycle : 60% 焊丝直径 Wire Size : 0.9-1.2 mm		
NO.	描述	Description
	ORK KH600A 整枪 3米	ORK KH600A Complete Torch 3M
	ORK KH600A 整枪 5米	ORK KH600A Complete Torch 5M
1	喷嘴 Φ19mm	Nozzle Φ19mm
2	M6 *45 *1.0 导电嘴, 紫铜	M6 *45 *1.0 Contact Tip , E-Cu
	M6 *45 *1.2 导电嘴, 紫铜	M6 *45 *1.2 Contact Tip , E-Cu
	M6 *45 *1.6 导电嘴, 紫铜	M6 *45 *1.6 Contact Tip , E-Cu
	M6 *45 *1.0 导电嘴, 铬锆铜	M6 *45 *1.0 Contact Tip , CuCrZr
	M6 *45 *1.2 导电嘴, 铬锆铜	M6 *45 *1.2 Contact Tip , CuCrZr
	M6 *45 *1.6 导电嘴, 铬锆铜	M6 *45 *1.6 Contact Tip , CuCrZr
	M6 *45 *2.4 导电嘴, 铬锆铜	M6 *45 *2.4 Contact Tip , CuCrZr
3	分流器	Gas Diffuser
4	绝缘环	Insulator
5	水套	Water Insulator

NO.	描述	Description
6	弯管	Swan Neck
7	前把壳	Front Handle
8	牛皮护套管	Leather Hose
9	气管接头 9/16-18	Gas Inlet Connector 9/16-18
10	水管接头 5/8-18	Water Inlet Connector 5/8-18
11	电缆接头 7/8-14	Cable Connector 7/8-14
12	送丝管接头 M22 *2.5	Liner Connector M22 *2.5
13	控制插头	Control Plug
14	送丝软管, 适用焊丝 Φ1.0-1.2 , 3.5 米	Liner,For wire Φ1.0-1.2 , 3.5M
	送丝软管, 适用焊丝 Φ1.0-1.2 , 5.5 米	Liner,For wire Φ1.0-1.2 , 5.5M

易损件 Wear Parts			
喷嘴 Nozzle		分流器 Gas Diffuser	
描述	Description	描述	Description
喷嘴 Φ19mm	Nozzle Φ19mm	分流器 陶瓷	Gas Diffuser Ceramic


导电嘴 Contact Tip	
--------------------	--

描述	Description
M6 *45 *1.0 导电嘴, 紫铜	M6 *45 *1.0 Contact Tip , E-Cu
M6 *45 *1.2 导电嘴, 紫铜	M6 *45 *1.2 Contact Tip , E-Cu
M6 *45 *1.6 导电嘴, 紫铜	M6 *45 *1.6 Contact Tip , E-Cu
M6 *45 *1.0 导电嘴, 铬锆铜	M6 *45 *1.0 Contact Tip , CuCrZr
M6 *45 *1.2 导电嘴, 铬锆铜	M6 *45 *1.2 Contact Tip , CuCrZr
M6 *45 *1.6 导电嘴, 铬锆铜	M6 *45 *1.6 Contact Tip , CuCrZr
M6 *45 *2.4 导电嘴, 铬锆铜	M6 *45 *2.4 Contact Tip , CuCrZr


水套 Water Insulator		弯管 Swan Neck	
-----------------------	--	-----------------	--

描述	Description	描述	Description
水套	Water Insulator	弯管	Swan Neck


Compatible parts For Fronius AL3Q00AW4000
兼容配件适用于福尼斯AL300Q AW4000

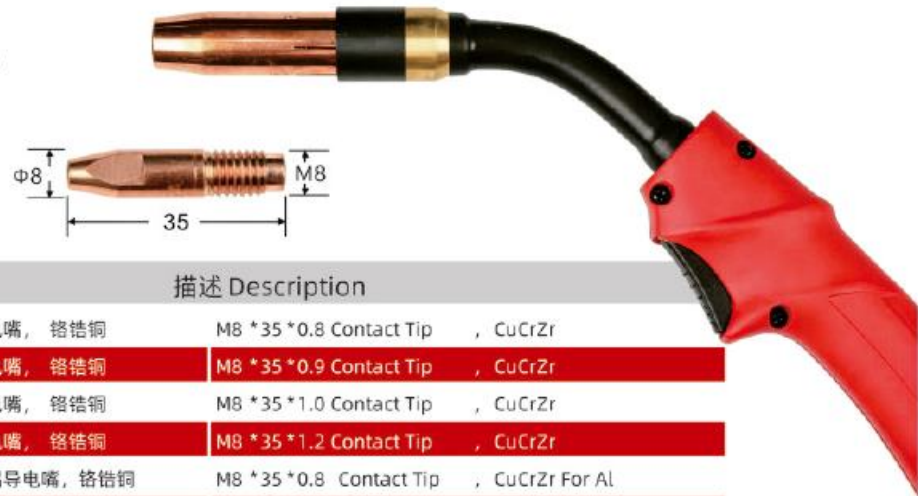


Order	描述 Description		
LD9004.228	M8 *35 *0.8 导电嘴, 铬锆铜	M8 *35 *0.8 Contact Tip	, CuCrZr
	M8 *35 *0.9 导电嘴, 铬锆铜	M8 *35 *0.9 Contact Tip	, CuCrZr
	M8 *35 *1.0 导电嘴, 铬锆铜	M8 *35 *1.0 Contact Tip	, CuCrZr
	M8 *35 *1.2 导电嘴, 铬锆铜	M8 *35 *1.2 Contact Tip	, CuCrZr
	M8 *35 *0.8 焊铝导电嘴, 铬锆铜	M8 *35 *0.8 Contact Tip	, CuCrZr For Al
	M8 *35 *1.0 焊铝导电嘴, 铬锆铜	M8 *35 *1.0 Contact Tip	, CuCrZr For Al
	M8 *35 *1.2 焊铝导电嘴, 铬锆铜	M8 *35 *1.2 Contact Tip	, CuCrZr For Al
	M8 *35 *1.4 焊铝导电嘴, 铬锆铜	M8 *35 *1.4 Contact Tip	, CuCrZr For Al
	M8 *35 *1.6 焊铝导电嘴, 铬锆铜	M8 *35 *1.6 Contact Tip	, CuCrZr For Al



Order	描述 Description	
ORK9003.124	喷嘴	Nozzle




Order	描述 Description	
ORK9039.056	连接杆	Contact Tip Holder




Order	描述 Description	
ORK9165.001	喷嘴卡槽	Nozzle Retainer


Compatible torch And Parts For Fronius Kemppi
兼容配件适用于肯比

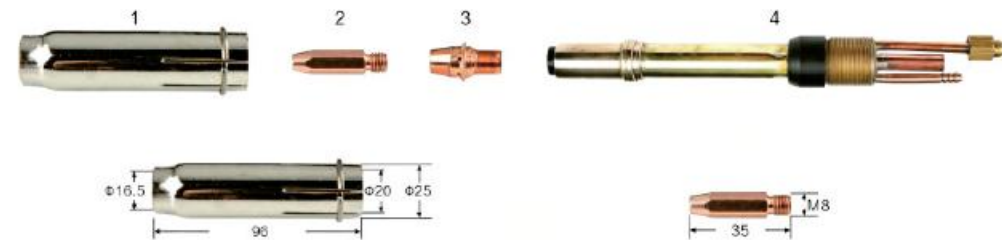

Order	描述 Description		Order	描述 Description	
ORK9003.015	1 喷嘴	Nozzle	ORK9004.009	2 导电嘴 0.8-1.0-1.2-1.6	Contact Tip0.8-1.0-1.2-1.6



Order	描述 Description		Order	描述 Description	
ORK9039.015	3 连接杆	Tip Holder	ORK9014.051	4 枪管	Swan Neck

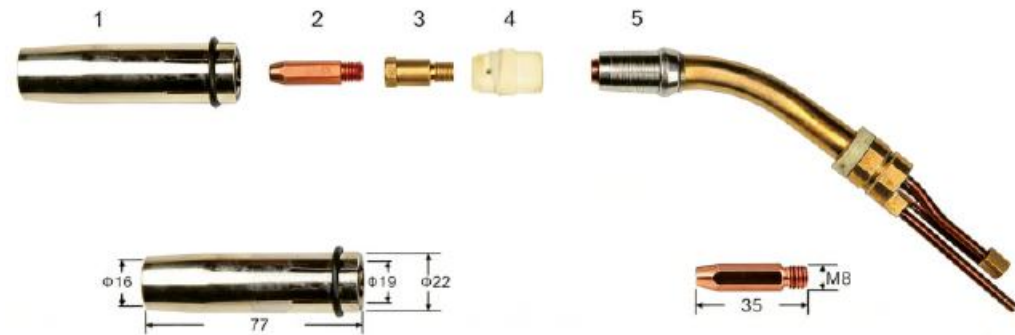


Order	描述 Description		Order	描述 Description	
ORK9003.101	1 喷嘴	Nozzle	ORK9004.035	2 导电嘴 0.8-1.0-1.2-1.6	Contact Tip0.8-1.0-1.2-1.6




Order	描述 Description		Order	描述 Description		Order	描述 Description	
ORK9039.060	3 连接杆	Tip Holder	ORK9006.002	4 分流器	Gas Diffuser	LD9014.052	5 弯管	Swan Neck

Compatible torch and Parts For ESAB
ORK PSF 250/305/405/505 Air Cooled MIG/MAG Welding Torch
枪与配件适用于伊萨
ORK PSF 250/305/405/505 气体保护焊枪

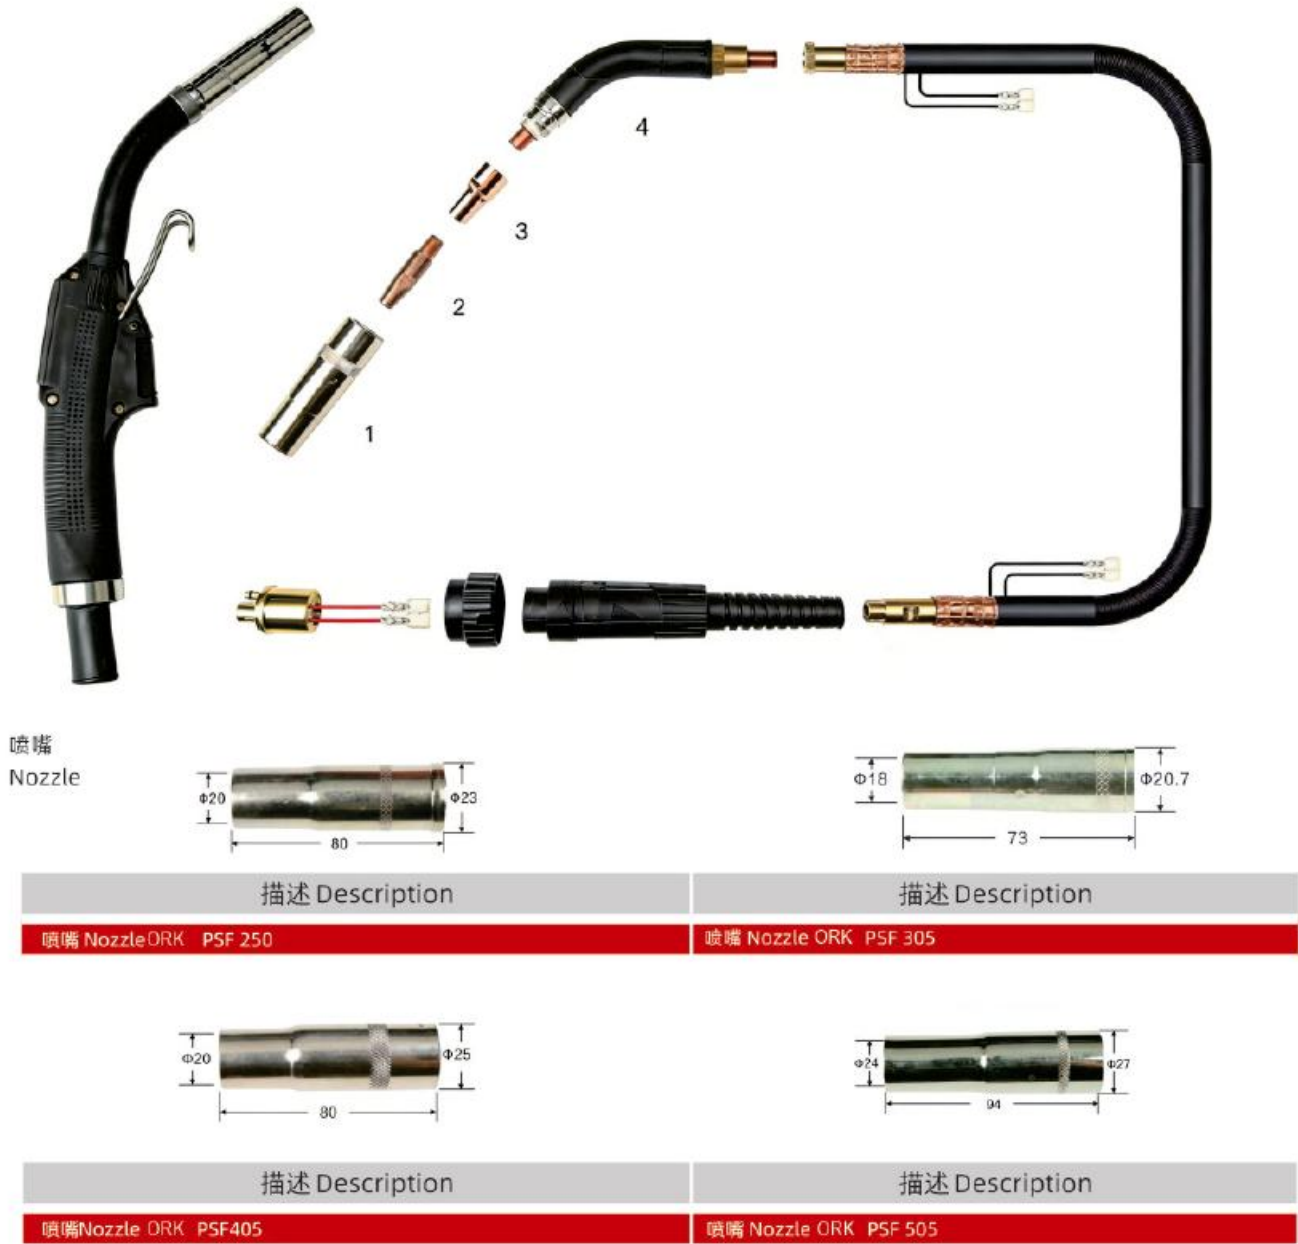


Compatible parts For BINZEL
Automatic Welding Torches
兼容配件适用于宾采尔
自动焊枪

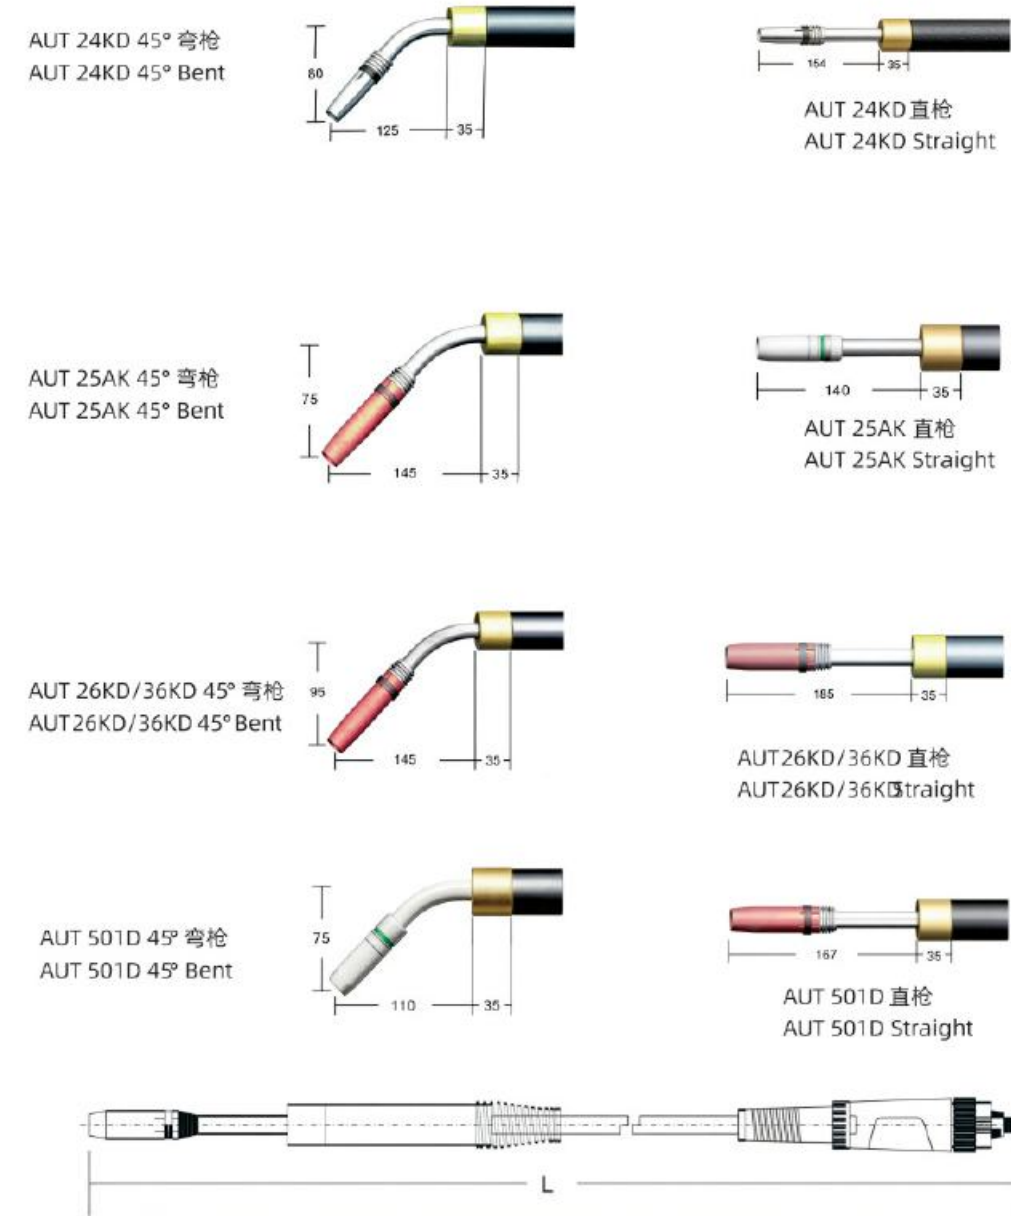


Please indicate torches type, torch geometry (Straight or 45° Bent) and length when ordering the complete torch
订购整枪时, 请注明焊枪型号, 枪颈弯度 (直柄或45°弯柄) 及焊枪长度
The consumables-contact tip, gas nozzle, gas diuser, contact tip holder and liner are identical with those of manual welding torches of same size
以上焊枪的易损件: 导电嘴、喷嘴、分流器、连接杆、送丝软管, 与同型号的手动焊枪通用

Compatible parts For Lincoln
兼容配件适用于林肯

适用于林肯 350A
Compatible parts For Lincoln350



Order	描述 Description	
ORK9004.226	导电嘴, 铬钴铜 0.8	0.8 Contact Tip , CuCrZr
	导电嘴, 铬钴铜 1.0	1.0 Contact Tip , CuCrZr
	导电嘴, 铬钴铜 1.2	1.2 Contact Tip , CuCrZr



Order	描述 Description	Order	描述 Description
ORK9003.122	喷嘴 Nozzle	ORK9011.041	绝缘套 Insulator




Order	描述 Description	Order	描述 Description
ORK9039.080	连接杆 Contact Tip Holder	ORK9014.068	5弯管 Swan Neck

适用于林肯 500A
Compatible parts For Lincoln500



Order	描述 Description	
ORK9004.227	导电嘴, 铬钴铜 0.8	0.8 Contact Tip , CuCrZr
	导电嘴, 铬钴铜 1.0	1.0 Contact Tip , CuCrZr
	导电嘴, 铬钴铜 1.2	1.2 Contact Tip , CuCrZr

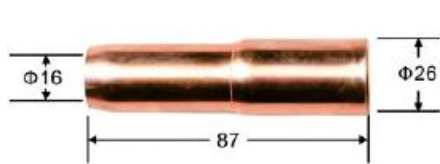


Order	描述 Description	Order	描述 Description
ORK9003.123	喷嘴 Nozzle	ORK9011.042	绝缘套 Insulator



Order	描述 Description	Order	描述 Description
ORK9039.081	连接杆 Contact Tip Holder	ORK9014.069	5弯管 Swan Neck

适用于林肯药芯焊
Compatible parts For Lincoln Flux-cored



Order	描述 Description	
ORK9004.229	药芯焊导电嘴 2.0, 铬钴铜	Flux-cored Contact Tip2.0 , CuCrZr



Order	描述 Description	Order	描述 Description
ORK9014.011	药芯焊弯管 60° Flux-cored Swan Neck 60°	ORK9014.010	药芯焊弯管 90° Flux-cored Swan Neck 90°

Optional Central Connectors
可选焊接接口形式

We can provide any style connectors according to customers' requirement
我们可以根据客户的需求提供各种接口的焊枪

Compatible arts For Binzel
兼容配件适用于宾采尔



Compatible arts For Panasonic
兼容配件适用于松下



Compatible arts For Lincoln
兼容配件适用于林肯



Compatible arts For ESAB
兼容配件适用于伊萨



Compatible arts For Binzel 501D
兼容配件适用于宾采尔 501D



Compatible arts For OTC
兼容配件适用于欧地希



Compatible arts For Kemppi
兼容配件适用于肯比



Compatible arts For Miller
兼容配件适用于米勒




Other Accessories
其他配件

Compatible arts For Binzel
兼容配件适用于宾采尔



Connector with spin pins 插头 带弹性针

Compatible arts For Binzel
兼容配件适用于宾采尔

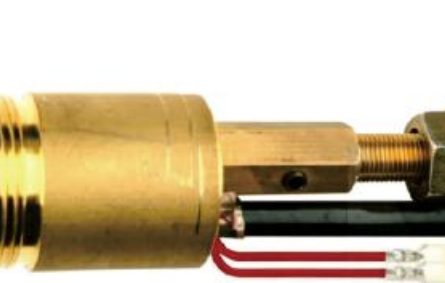

Socket 插座

Compatible arts For OTC
兼容配件适用于欧地希



Connector with spin pins 插头 带弹性针

Compatible arts For Binzel
兼容配件适用于宾采尔



Connector with spin pins 插头 带弹性针

Compatible arts For Binzel
兼容配件适用于宾采尔



InsulationFlange 绝缘法兰

Compatible arts For Panasonic
兼容配件适用于松下



Socket 插座

导电嘴

Contact Tip



描述 Description

M6 * 27 * 0.8 导电嘴, 紫铜	M6 * 27 * 0.8 Contact Tip , E-Cu	M8 * 37 * 1.0 导电嘴, 紫铜	M8 * 37 * 1.0 Contact Tip , E-Cu
M6 * 27 * 0.9 导电嘴, 紫铜	M6 * 27 * 0.9 Contact Tip , E-Cu	M8 * 37 * 1.2 导电嘴, 紫铜	M8 * 37 * 1.2 Contact Tip , E-Cu
M6 * 27 * 1.0 导电嘴, 紫铜	M6 * 27 * 1.0 Contact Tip , E-Cu	M8 * 37 * 1.6 导电嘴, 紫铜	M8 * 37 * 1.6 Contact Tip , E-Cu
M6 * 27 * 1.2 导电嘴, 紫铜	M6 * 27 * 1.2 Contact Tip , E-Cu	M8 * 37 * 1.0 导电嘴, 铬锆铜	M8 * 37 * 1.0 Contact Tip , CuCrZr
M6 * 27 * 0.8 导电嘴, 铬锆铜	M6 * 27 * 0.8 Contact Tip , CuCrZr	M8 * 37 * 1.2 导电嘴, 铬锆铜	M8 * 37 * 1.2 Contact Tip , CuCrZr
M6 * 27 * 1.0 导电嘴, 铬锆铜	M6 * 27 * 1.0 Contact Tip , CuCrZr	M8 * 37 * 1.6 导电嘴, 铬锆铜	M8 * 37 * 1.6 Contact Tip , CuCrZr
M6 * 27 * 1.2 导电嘴, 铬锆铜	M6 * 27 * 1.2 Contact Tip , CuCrZr	M8 * 37 * 2.0 导电嘴, 铬锆铜	M8 * 37 * 2.0 Contact Tip , CuCrZr
		M8 * 37 * 2.4 导电嘴, 铬锆铜	M8 * 37 * 2.4 Contact Tip , CuCrZr

连接杆

Contact Tip Holder



描述 Description

连接杆 Contact Tip Holder PSF250	连接杆 Contact Tip Holder PSF305
-------------------------------	-------------------------------



描述 Description

连接杆 Contact Tip Holder PS405	连接杆 Contact Tip Holder PSF505
------------------------------	-------------------------------

弯管

Swan Neck



描述 Description

弯管 Swan Neck PSF250	弯管 Swan Neck PSF305
---------------------	---------------------



描述 Description

弯管 Swan Neck PSF405	弯管 Swan Neck PSF505
---------------------	---------------------

ZY-200A Spool Gun

ZY-200A 拉丝焊枪



NO.	描述	Description
	ZY200A 整枪 3米	ZY200A Complete Torch 3M
	ZY200A 整枪 5米	ZY200A Complete Torch 5M
1	拉丝喷嘴	Spool Nozzle
2	拉丝导电嘴	Spool Tip
3	焊丝盘	Wire Cover
4	控制插头	Control Plug
5	欧式接口	Euro Connector




描述	Description
拉丝喷嘴	Spool Nozzle




描述	Description
拉丝导电嘴	Spool Tip

Compatible arts For OTC
兼容配件适用于欧地希



Order	Description	
NO.	喷嘴	Nozzle
LD9003.060	适用于-180A	Use For -180A



NO.	喷嘴	Nozzle
LD9003.009	适用于-350A	Use For -350A



NO.	喷嘴	Nozzle
LD9003.012	适用于-500A	Use For -500A




NO.	绝缘套	Insulator
LD9003.003	适用于-180A	Use For -80A



NO.	绝缘套	Insulator
LD9011.028	适用于-350A	Use For -350A



NO.	绝缘套	Insulator
LD9011.009	适用于-500A	Use For -500A



NO.	连接杆	Contact Tip Holder
LD9033.008	适用于-350A	Use For -350A

Compatible arts For OTC
兼容配件适用于欧地希



Order	Description	
NO.	连接杆	Contact Tip Holder
LD9039.002	适用于-350A	Use For -350A



NO.	分体弯管	Scan Neck Separable
LD9014.047	适用于-350A	Use For -350A



NO.	分体弯管	Scan Neck Separable
LD9014.048	适用于-500A	Use For -500A



NO.	一体弯管	Scan Neck
LD9014.031	适用于-180A	Use For -180A



NO.	一体弯管	Scan Neck
LD9014.024	适用于-350A	Use For -350A




NO.	一体弯管	Scan Neck
LD9014.049	适用于-500A	Use For -500A

ORK SP-60 Air Cooled Plasma Cutting orch
ORK SP-60 气体冷却等离子切割枪




NO.	Description	Standard No.
1	SP-60 枪头	SP-60 Torch Head
2	保护罩	Shield
3	割嘴	Cutting Nozzle
4	电极	Electrode

ORK PT-31 Air Cooled Plasma Cutting orch
ORK PT-31 气体冷却等离子切割枪

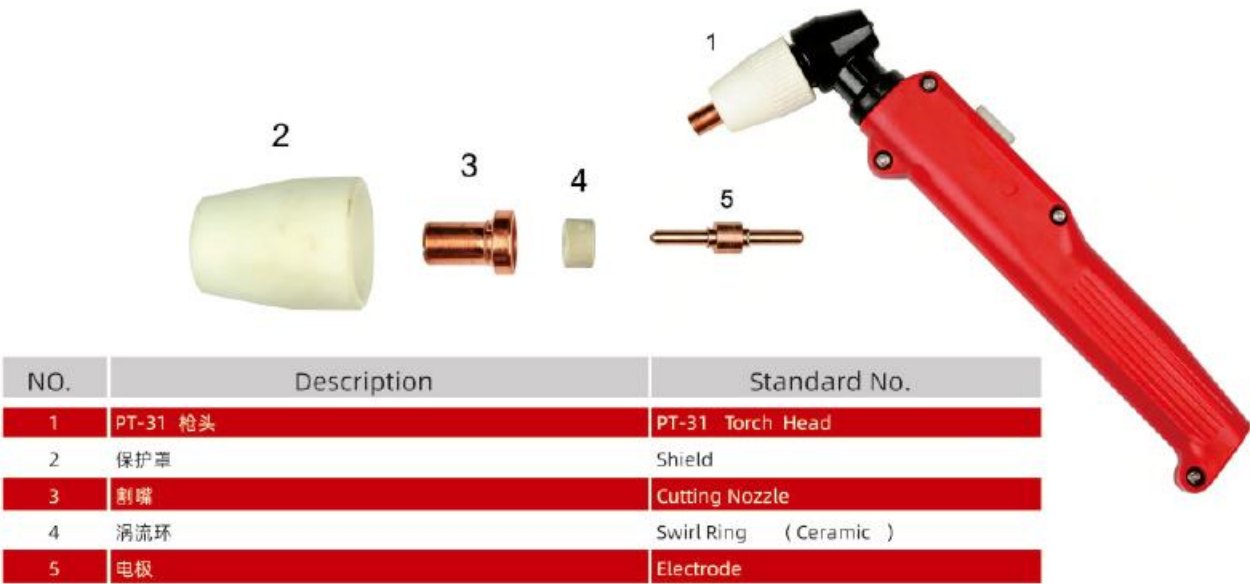


NO.	Description	Standard No.
1	PT-31 枪头	PT-31 Torch Head
2	保护罩	Shield
3	割嘴	Cutting Nozzle
4	涡流环	Swirl Ring (Ceramic)
5	电极	Electrode

ORK A-81 Air Cooled Plasma Cutting orch
ORK A-81 气体冷却等离子切割枪

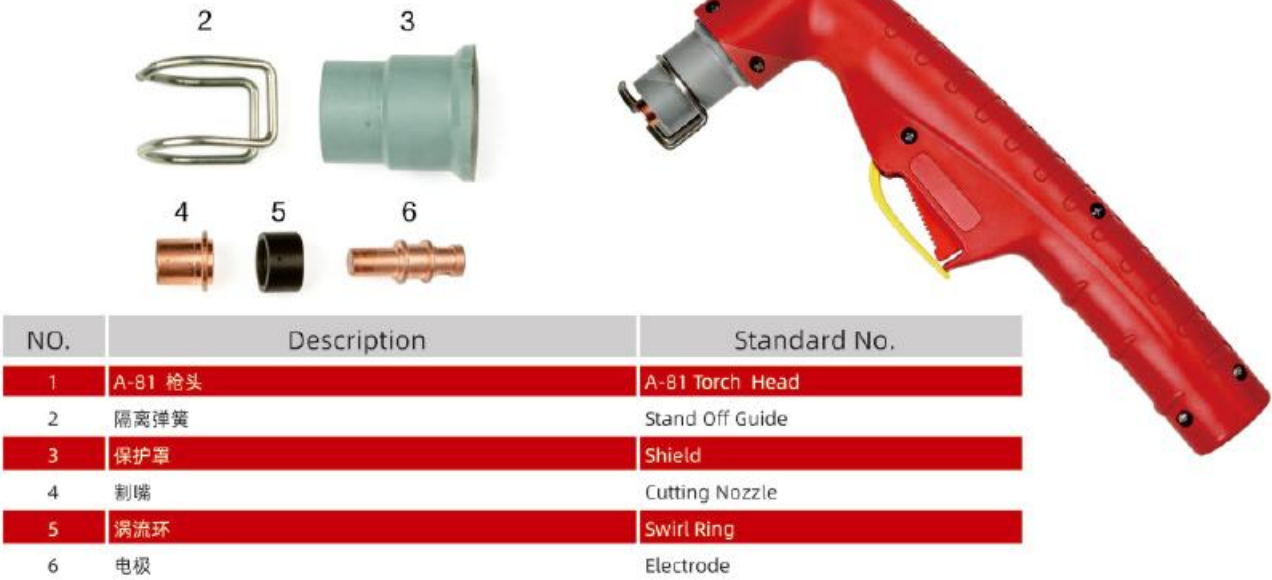


NO.	Description	Standard No.
1	A-81 枪头	A-81 Torch Head
2	隔离弹簧	Stand Off Guide
3	保护罩	Shield
4	割嘴	Cutting Nozzle
5	涡流环	Swirl Ring
6	电极	Electrode

ORK CB-50 Air Cooled Plasma Cutting orch
ORK CB-50 气体冷却等离子切割枪

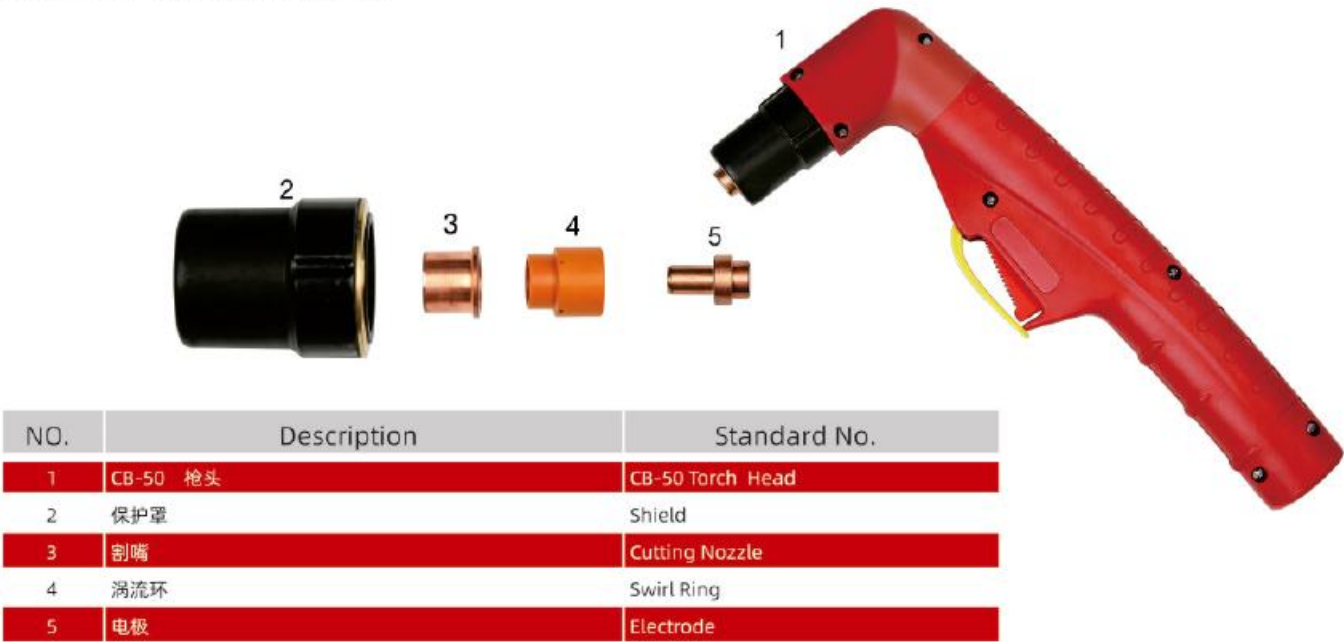


NO.	Description	Standard No.
1	CB-50 枪头	CB-50 Torch Head
2	保护罩	Shield
3	割嘴	Cutting Nozzle
4	涡流环	Swirl Ring
5	电极	Electrode

ORK LT-50 Air Cooled Plasma Cutting Orch
ORK LT-50气体冷却等离子切割枪

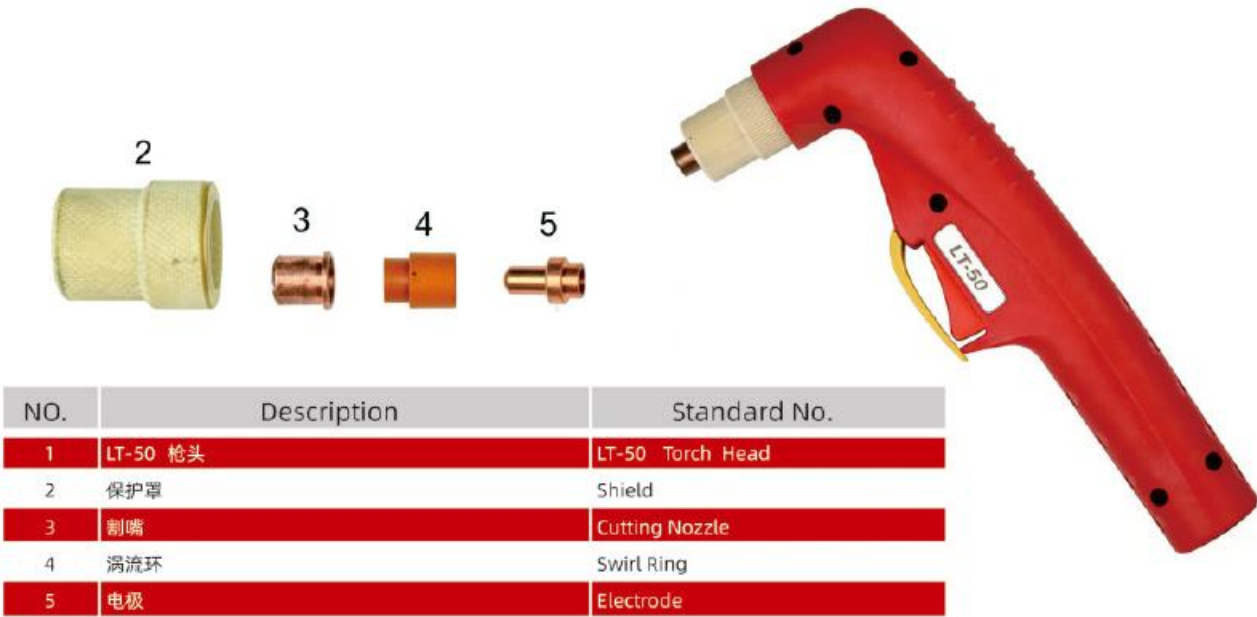

ORK TongChang60 Air Cooled Plasma Cutting orch
ORK 同昌60气体冷却等离子切割枪

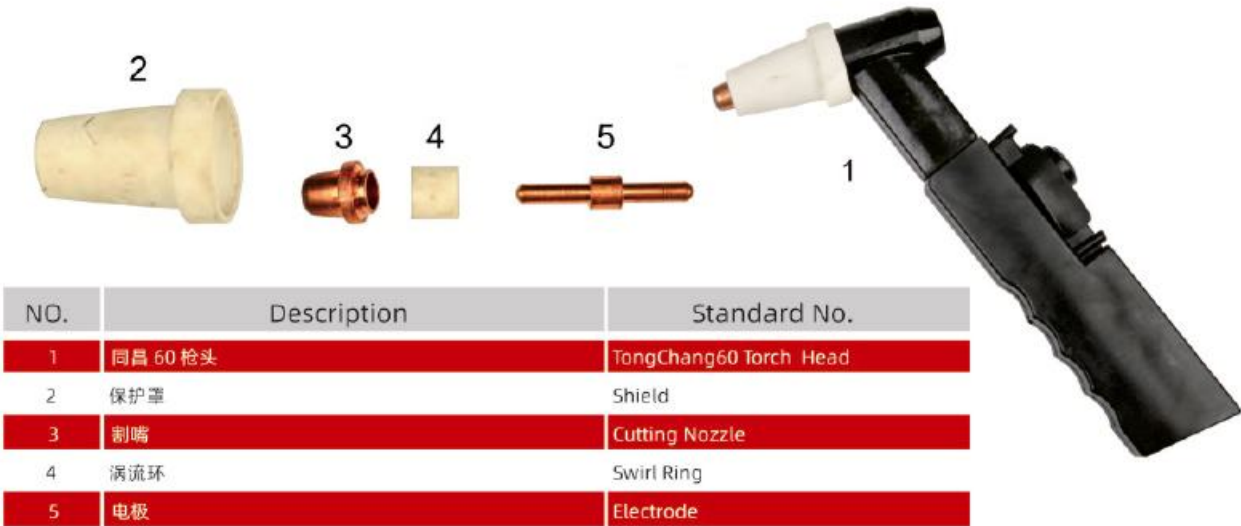


ORK AG-60 Air Cooled Plasma Cutting orch
ORK AG-60 气体冷却等离子切割枪



ORK SG-51 Air Cooled Plasma Cutting orch
ORK SG-51气体冷却等离子切割枪



HIGH FREQUENCY高频系列
Compatible torch and Parts For PANASONIC
ORK P-80(YT-06PD/YT-06PE/YT-08PD/YT-08PE/YT-10PD/YT10-PE)Air Cooled Cutting torch
枪与配件适用于松下
ORK P-80(YT-06PD/YT-06PE/YT-08PD/YT-08PE/YT-10PD/YT10-PE)气体冷却等离子切割枪

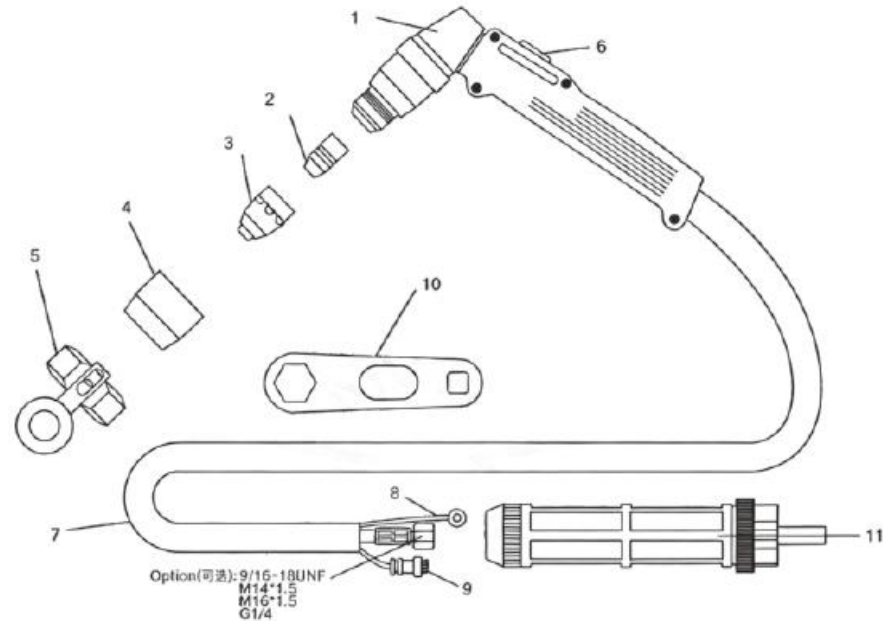

技术参数 Technical Data	
Standard Length (标准长度)	5M
Air Pressure (工作气压)	4.5-5.5bar
YT 06PD/PE Duty Cycle 60%(60%)	暂载率)60A
YT 08PD/PE Duty Cycle 60%(60%)	暂载率)80A
YT 10PD/PE Duty Cycle 60%(60%)	暂载率) 100A
YT 10PD/PE Duty Cycle 100%(100%)	暂载率) 60A

NO.	Description	Standard No.
1	ORK P80 手动枪头 ORK P8P 机用枪头	
2	电极	
3	割嘴 1.1mm 40A	Nozzle 1.1mm 40A
	割嘴 1.3mm 50A	Nozzle 1.3mm 50A
	割嘴 1.5mm 80A	Nozzle 1.5mm 80A
	割嘴 1.7mm 100A	Nozzle 1.7mm 100A
4	镀银保护罩	Shield With Connector Silver
	普通保护罩	Normal Shield
5	导向轮	Site Wheel

NO.	Description	Standard No.
6	开关	Switch
7	电缆组	Cable Ass embly
8	引弧线	Pilot Cable
9	松下 2 芯插头	Panasonic 2.Pin
10	扳手	Spanner
11	中央插头	Central Adaptor

Wear Parts (易损件)

电极
Electrode



描述	Description
电极	Electrode

割嘴
Cutting Nozzle



描述	Description
割嘴 1.1mm 40A	Cutting Nozzle 1.1mm 40A
割嘴 1.3mm 50A	Cutting Nozzle 1.3mm 50A
割嘴 1.5mm 80A	Cutting Nozzle 1.5mm 80A
割嘴 1.7mm 100A	Cutting Nozzle 1.7mm 100A

保护罩
Shield




描述	Description
镀银保护罩	Shield With Connector Silver Plated
普通保护罩	Normal Shield

Shield with connector silver plated is used for torch with protection loop,Normal shield without silver plated is used for torchwithout protection loop.
镀银保护罩适用于带有保护电路的切割枪，普通保护罩适用于不带有保护电路的切割枪。

Other TIG Torch
其他型号氩弧焊枪




27 Series Water Cooled TIG Torches
27系列水冷氩弧焊枪

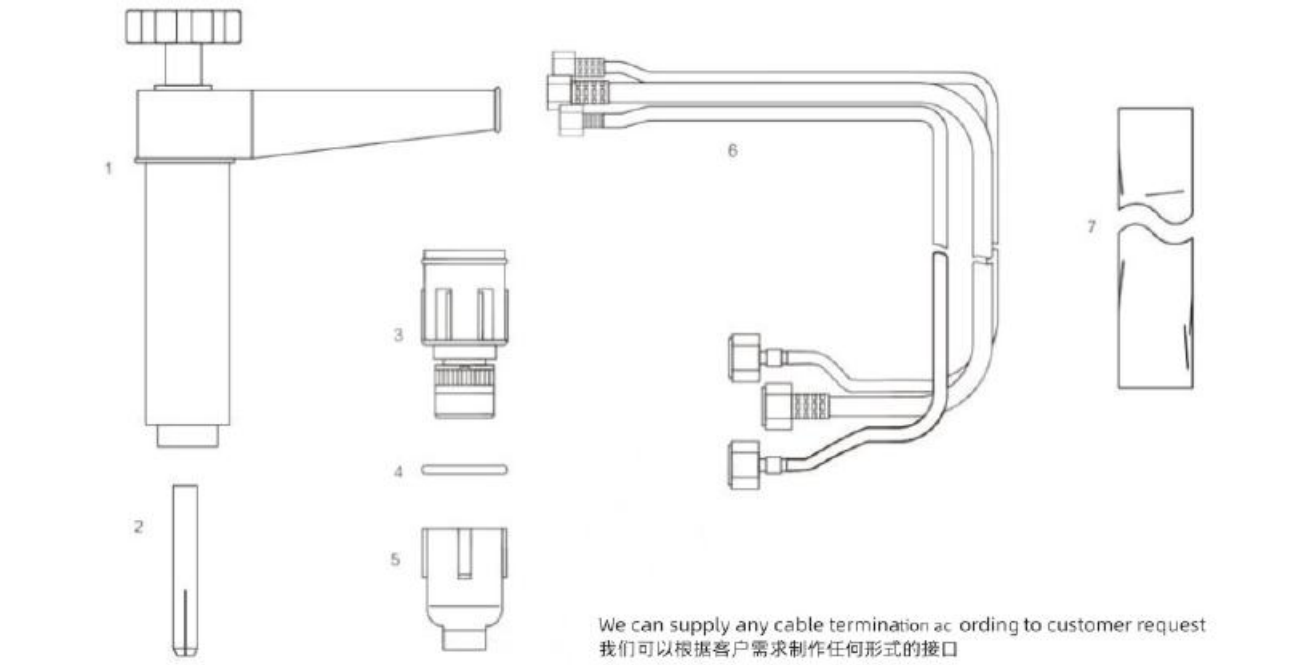

技术参数 Technical Data		
额定值 Rating : 500A DC/80A AC 暂载率 Duty Cycle : 100% 钨棒直径 Electrodes : 6.4mm		
NO.	Description	Standard No.
	WP-2 Torch WP-27 枪	WP-27-1 (4M)
	WP-27 Long Torch WP-27 枪	WP-27-1L (4M)
	Torch Body (8" Long,Include Shaft and Boot) 枪头 (8英寸, 含阀杆)	WP-27
1	Torch Body (20" Long,Include Shaft and Boot) 枪头 (20英寸, 含阀杆)	WP-27
2	Collet 钨极夹	57N46,1.6mm
	Collet 钨极夹	57N47,2.4mm
	Collet 钨极夹	57N48,3.2mm
	Collet 钨极夹	57N49,4.0mm
3	Gas Lens 小气筛	49V23,1.6mm
	Gas Lens 小气筛	49V24,2.4mm
	Gas Lens 小气筛	49V25,3.2mm
	Gas Lens 小气筛	49V26,4.0mm
4	Gasket 绝缘垫片	57N56
5	Ceramic Nozzle 瓷嘴	57N75,10mm
	Ceramic Nozzle 瓷嘴	57N74,13mm
	Ceramic Nozzle 瓷嘴	53N88,16mm
	Ceramic Nozzle 瓷嘴	53N87,19mm
	Ceramic Nozzle 瓷嘴	53N89,short
6	Cable Assembly 电缆组	
7	Cable Assembly Cover 电缆护套	


26 Series Air Cooled TIG Torches
26系列气冷氩弧焊枪

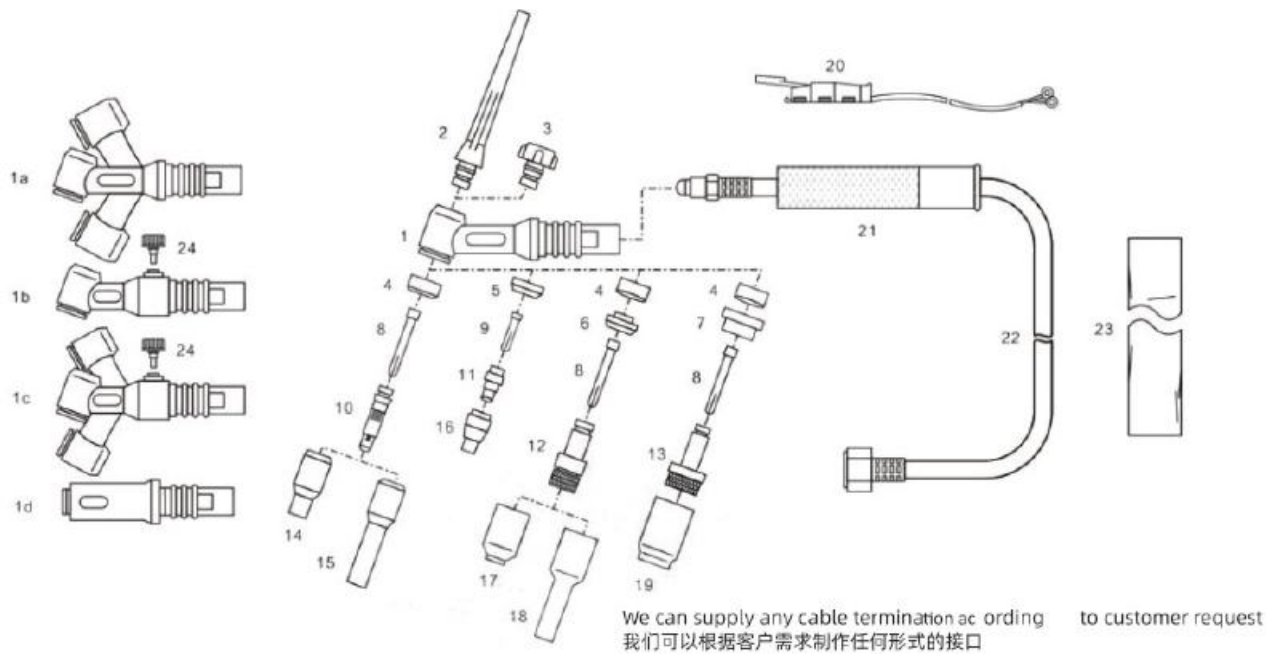

技术参数 Technical Data			
额定值 Rating : 250A DC/160A AC 暂载率 Duty Cycle : 60% 钨棒直径 Electrodes : 0.5-3.2mm			
NO.	Description		Standard No.
	WP-26 Torch (Gas and Cable Whole)	WP-26 枪 (气电一体)	WP-26-1 (4M)
	WP-26 Torch (Gas and Cable Whole)	WP-26 枪 (气电一体)	WP-26-1 (8M)
	WP-26 Torch (Gas and Cable Separate)	WP-26 枪 (气电一体)	WP-26-2 (4M)
	WP-26 Torch (Gas and Cable Separate)	WP-26 枪 (气电一体)	WP-26-2 (8M)
1	Torch Body 枪头		WP-26
1a	Torch Body (Flexible) 枪头 (柔性)		WP-26F
1b	Torch Body (Valve) 枪头 (带气阀)		WP-26V
1c	Torch Body (Flexible and Valve) 枪头 (柔性带气阀)		WP-26FV
1d	Torch Body (Pencil) 枪头 (直式)		WP-26P
2	Long Back Cap 长后帽		57Y02
3	Short Back Cap 短后帽		57Y04
4	Gasket 枪头绝缘帽		18CG
5	Stubby Gasket 短绝缘帽		18CG-20
6	Gas Lens Insulator 气筛用绝缘帽		54N01
7	Large Dia.Gas Lens Insulator 大气筛用绝缘帽		54N63
8	Collet 钨极夹		10N21,0.5mm
	Collet 钨极夹		10N22,1.0mm
	Collet 钨极夹		10N23,1.6mm
	Collet 钨极夹		10N23M,2.0mm
	Collet 钨极夹		10N24,2.4mm
	Collet 钨极夹		10N25,3.2mm

9	Stubby Collet	短钨极夹	10N215,0.5mm
	Stubby Collet	短钨极夹	10N225,1.0mm
	Stubby Collet	短钨极夹	10N235,1.6mm
	Stubby Collet	短钨极夹	10N23MS,2.0mm
	Stubby Collet	短钨极夹	10N245,2.4mm
	Stubby Collet	短钨极夹	10N255,3.2mm
10	Collect Body	连接杆	10N29,0.5mm
	Collect Body	连接杆	10N30,1.0mm
	Collect Body	连接杆	10N31,1.6mm
	Collect Body	连接杆	10N32,2.4mm
	Collect Body	连接杆	10N28,3.2mm
11	Stubby Collet Body	短连接杆	17CB20 All Size
12	Medium Gas Lens	中气筛	45V29,0.5mm
	Medium Gas Lens	中气筛	45V24,1.0mm
	Medium Gas Lens	中气筛	45V25,1.6mm
	Medium Gas Lens	中气筛	45V 26, 2.4 mm
	Medium Gas Lens	中气筛	45V 27, 3.2 mm
13	Large Long Gas Lens	大长气筛	45V116,1.6mm
	Large Long Gas Lens	大长气筛	45V64,2.4mm
	Large Long Gas Lens	大长气筛	995795,3.2mm
	Large Long Gas Lens	大长气筛	45V63,4.0mm
14	Ceramic Nozzle	瓷嘴	10N50,6mm
	Ceramic Nozzle	瓷嘴	10N49,8mm
	Ceramic Nozzle	瓷嘴	10N48,10mm
	Ceramic Nozzle	瓷嘴	10N47,11mm
	Ceramic Nozzle	瓷嘴	10N46,13mm
	Ceramic Nozzle	瓷嘴	10N45,16mm
	Ceramic Nozzle	瓷嘴	10N44,19mm
15	Long Length Ceramic Nozzle	长瓷嘴	10N49L,8mm
	Long Length Ceramic Nozzle	长瓷嘴	10N48L,10mm
	Long Length Ceramic Nozzle	长瓷嘴	10N47L,11mm
16	Stubby Ceramic Nozzle	短瓷嘴	13N08,6mm
	Stubby Ceramic Nozzle	短瓷嘴	13N09,8mm
	Stubby Ceramic Nozzle	短瓷嘴	13N10,10mm
	Stubby Ceramic Nozzle	短瓷嘴	13N11,11mm
	Stubby Ceramic Nozzle	短瓷嘴	13N12,13mm
	Stubby Ceramic Nozzle	短瓷嘴	13N13,16mm
17	Ceramic Nozzle	瓷嘴	54N18,6mm
	Ceramic Nozzle	瓷嘴	54N17,8mm
	Ceramic Nozzle	瓷嘴	54N16,10mm
	Ceramic Nozzle	瓷嘴	54N15,11mm
	Ceramic Nozzle	瓷嘴	54N14,13mm
	Ceramic Nozzle	瓷嘴	54N19,17mm
18	Extra Long Ceramic Nozzle	特长瓷嘴	54N17L,8mm
	Extra Long Ceramic Nozzle	特长瓷嘴	54N16L,10mm
	Extra Long Ceramic Nozzle	特长瓷嘴	54N15L,11mm
19	Extra Dia Ceramic Nozzle	特长瓷嘴	57N75,10mm
	Extra Dia Ceramic Nozzle	特长瓷嘴	57N74,13mm
	Extra Dia Ceramic Nozzle	特长瓷嘴	53N88,16mm
	Extra Dia Ceramic Nozzle	特长瓷嘴	53N87,19mm
20	Switch(with wire)	开关 (带控制线)	
21	Handle	手柄	85WP13
22	Cable Assembly	电缆组	
23	Cable Assembly	Cover 电缆护套	
	Valve Stem	阀杆	VS-1

20 Series Water Cooled TIG Torches
20系列水冷氩弧焊枪

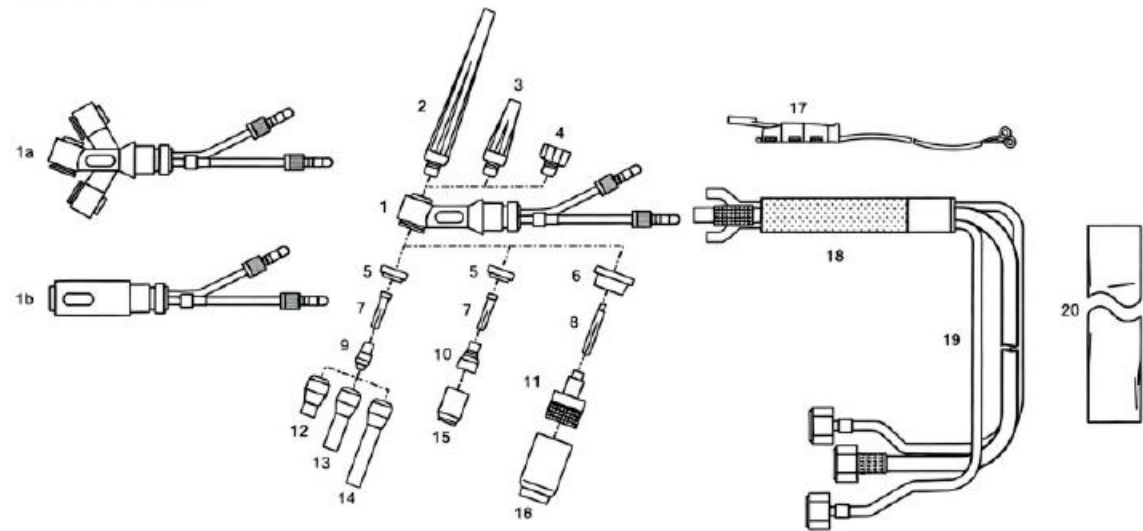


We can supply any cable termination according to customer request
我们可以根据客户需求制作任何形式的接口

技术参数 Technical Data		
额定值 Rating : 250A DC/175A AC 暂载率 Duty Cycle : 100% 钨棒直径 Electrodes : 0.5-3.2mm		
NO.	Description	Standard No.
	WP-20 Torch WP-20 枪	WP-20 (4M)
	WP-20 Torch WP-20 枪	WP-20 (8M)
1	Torch Body 枪头	WP-20
1a	Torch Body (Flexible) 枪头 (柔性)	WP-20F
1b	Torch Body (Pencil) 枪头 (直式)	WP-20P
2	Long Back Cap 长后帽	41V24
3	Medium Back Cap 中后帽	41V35
4	Short Back Cap 短后帽	41V33
5	Gasket 枪头绝缘帽	598882
6	Large Dia.Gas Lens Insulator 大气筛用绝缘帽	54N63-20
7	Collet 钨极夹	13N20,0.5mm
	Collet 钨极夹	13N21,1.0mm
	Collet 钨极夹	13N22,1.6mm
	Collet 钨极夹	13N22M,2.0mm
	Collet 钨极夹	13N23,2.4mm
	Collet 钨极夹	13N24,3.2mm
8	Large Dia.Gas Lens Collet 大气筛用钨极夹	13N20L,0.5mm
	Large Dia.Gas Lens Collet 大气筛用钨极夹	13N21L,1.0mm
	Large Dia.Gas Lens Collet 大气筛用钨极夹	13N22L,1.6mm
	Large Dia.Gas Lens Collet 大气筛用钨极夹	13N23L,2.4mm
	Large Dia.Gas Lens Collet 大气筛用钨极夹	13N24L,3.2mm

9	Collect Body 连接杆	13N25,0.5mm
	Collect Body 连接杆	13N26,1.0mm
	Collect Body 连接杆	13N27,2.0mm
	Collect Body 连接杆	13N28,2.4mm
	Collect Body 连接杆	13N29,3.2mm
10	Small Gas Lens 小气筛	45V41,0.5mm
	Small Gas Lens 小气筛	45V42,1.0mm
	Small Gas Lens 小气筛	45V43,1.6mm
	Small Gas Lens 小气筛	45V43M,2.0mm
	Small Gas Lens 小气筛	45V44,2.4mm
	Small Gas Lens 小气筛	45V4 5,3.2 mm
11	Large Stubby Gas Lens 大短气筛	45V02045,0.5/1.0mm
	Large Stubby Gas Lens 大短气筛	45V1165,1.6mm
	Large Stubby Gas Lens 大短气筛	45V6455,2.4mm
	Large Stubby Gas Lens 大短气筛	9957995,3.2mm
12	Ceramic Nozzle 加长瓷嘴	13N08,6mm
	Ceramic Nozzle 加长瓷嘴	13N09,8mm
	Ceramic Nozzle 加长瓷嘴	13N10,10mm
	Ceramic Nozzle 加长瓷嘴	13N11,11mm
	Ceramic Nozzle 加长瓷嘴	13N12,13mm
	Ceramic Nozzle 加长瓷嘴	13N13,16mm
13	Long Length Ceramic Nozzle 加长瓷嘴	796F70,5mm
	Long Length Ceramic Nozzle 加长瓷嘴	796F71,6mm
	Long Length Ceramic Nozzle 加长瓷嘴	796F72,8mm
	Long Length Ceramic Nozzle 加长瓷嘴	796F73,10mm
14	Extra Long Ceramic Nozzle 特长瓷嘴	796F74,5mm
	Extra Long Ceramic Nozzle 特长瓷嘴	769F75,6mm
	Extra Long Ceramic Nozzle 特长瓷嘴	796F76,8mm
	Extra Long Ceramic Nozzle 特长瓷嘴	796F77,10mm
15	Ceramic Nozzle 瓷嘴	53N58,6mm
	Ceramic Nozzle 瓷嘴	53N59,8mm
	Ceramic Nozzle 瓷嘴	53N60,10mm
	Ceramic Nozzle 瓷嘴	53N61,11mm
	Ceramic Nozzle 瓷嘴	53N615,13mm
16	Extra Dia.Ceramic Nozzle 特大瓷嘴	54N75,10mm
	Extra Dia.Ceramic Nozzle 特大瓷嘴	54N74,13mm
	Extra Dia.Ceramic Nozzle 特大瓷嘴	53N88,16mm
	Extra Dia.Ceramic Nozzle 特大瓷嘴	57N87,19mm
17	Switch(with wire) 开关 (带控制线)	
18	Handle 手把	105Z55
19	Cable Assembly 电缆组	
20	Cable Assembly Cover 电缆护套	

18 Series Water Cooled TIG Torches
18系列水冷氩弧焊枪

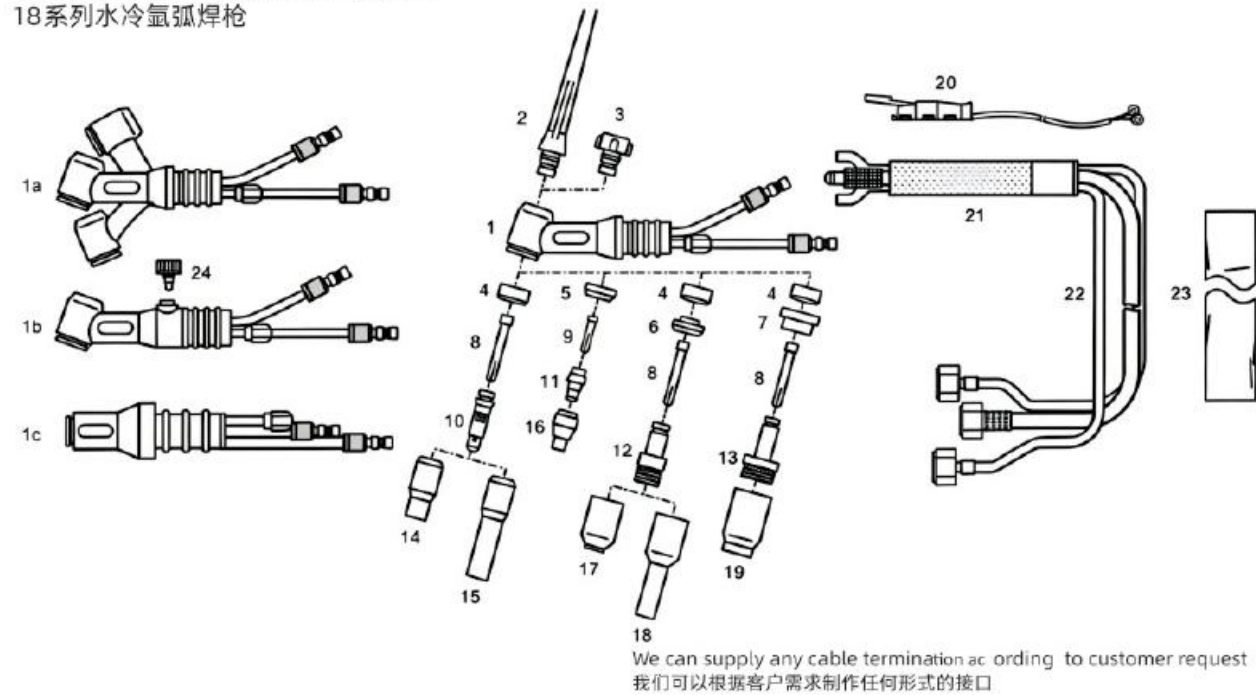


We can supply any cable termination according to customer request
我们可以根据客户需求制作任何形式的接口

技术参数 Technical Data		
额定值 Rating : 350A DC/250A AC 暂载率 Duty Cycle : 100% 钨棒直径 Electrodes : 0.5-4mm		
NO.	Description	Standard No.
	WP-18 Torch WP-18 枪	WP-18 (4M)
	WP-18 Torch WP-18 枪	WP-18 (8M)
1	Torch Body 枪头	WP-18
1a	Torch Body (Flexible) 枪头 (柔性)	WP-18F
1b	Torch Body (Valve) 枪头 (带气阀)	WP-18V
1c	Torch Body (Pencil) 枪头 (直式)	WP-18P
2	Long Back Cap 长后帽	57Y02
3	Short Back Cap 短后帽	57Y04
4	Gasket 枪头绝缘帽	18CG
5	Stubby Gasket 短绝缘帽	18CG-20
6	Gas Lens Insulator 气筛用绝缘帽	54N01
7	Large Dia.Gas Lens Insulator 大气筛用绝缘帽	54N63
8	Collet 钨极夹	10N21,0.5mm
	Collet 钨极夹	10N22,1.0mm
	Collet 钨极夹	10N23,1.6mm
	Collet 钨极夹	10N23M,2.0mm
	Collet 钨极夹	10N24,2.4mm
	Collet 钨极夹	10N24,3.2mm
9	Stubby Collet 短钨极夹	10N215,0.5mm

	Stubby Collet 短钨极夹	10N225,1.0mm
	Stubby Collet 短钨极夹	10N235,1.6mm
	Stubby Collet 短钨极夹	10N523M5,2.0mm
	Stubby Collet 短钨极夹	10N245,2.4mm
	Stubby Collet 短钨极夹	10N255,3.2mm
10	Collect Body 连接杆	10N29,0.5mm
	Collect Body 连接杆	10N30,1.0mm
	Collect Body 连接杆	10N31 , 1.6mm
	Collect Body 连接杆	10N32,2.4mm
	Collect Body 连接杆	10N28,3.2mm
11	Stubby Collet Body 短连接杆	17CB20 All Size
12	Medium Gas Lens 中气筛	45V29,0.5mm
	Medium Gas Lens 中气筛	45V24,1.0mm
	Medium Gas Lens 中气筛	45V25,1.6mm
	Medium Gas Lens 中气筛	45V 26 ,2.4 mm
	Medium Gas Lens 中气筛	45V27 , 2.4mm
13	Large Long Gas Lens 大长气筛	45V116,1.6mm
	Large Long Gas Lens 大长气筛	45V64,2.4mm
	Large Long Gas Lens 大长气筛	995795,3.2mm
	Large Long Gas Lens 大长气筛	45V63,4.0mm
14	Ceramic Nozzle 瓷嘴	10N50,6mm
	Ceramic Nozzle 瓷嘴	10N49,8mm
	Ceramic Nozzle 瓷嘴	10N48,10mm
	Ceramic Nozzle 瓷嘴	10N47,11mm
	Ceramic Nozzle 瓷嘴	10N46,13mm
	Ceramic Nozzle 瓷嘴	10N45,16mm
	Ceramic Nozzle 瓷嘴	10N44,19mm
15	Long Length Ceramic Nozzle 长瓷嘴	10N49L,8mm
	Long Length Ceramic Nozzle 长瓷嘴	10N48L,10mm
	Long Length Ceramic Nozzle 长瓷嘴	10N47L,11mm
16	Stubby Ceramic Nozzle 短瓷嘴	13N08,6mm
	Stubby Ceramic Nozzle 短瓷嘴	13N09,8mm
	Stubby Ceramic Nozzle 短瓷嘴	13N10,10mm
	Stubby Ceramic Nozzle 短瓷嘴	13N11,11mm
	Stubby Ceramic Nozzle 短瓷嘴	13N12,13mm
	Stubby Ceramic Nozzle 短瓷嘴	13N13,16mm
17	Ceramic Nozzle 瓷嘴	54N18,6mm
	Ceramic Nozzle 瓷嘴	54N17,8mm
	Ceramic Nozzle 瓷嘴	54N16,10mm
	Ceramic Nozzle 瓷嘴	54N15,11mm
	Ceramic Nozzle 瓷嘴	54N14,13mm
	Ceramic Nozzle 瓷嘴	54N19,17mm
18	Extra Long Ceramic Nozzle 特长瓷嘴	54N17L,8mm
	Extra Long Ceramic Nozzle 特长瓷嘴	54N16L,10mm
	Extra Long Ceramic Nozzle 特长瓷嘴	54N15L,11mm
19	Extra Dia Ceramic Nozzle 特长瓷嘴	57N75,10mm
	Extra Dia Ceramic Nozzle 特长瓷嘴	57N74,13mm
	Extra Dia Ceramic Nozzle 特长瓷嘴	53N88,16mm
	Extra Dia Ceramic Nozzle 特长瓷嘴	53N87,19mm
20	Switch(with wire) 开关 (带控制线)	
21	Handle 手柄	105Z55
22	Cable Assembly 电缆组	
23	Cable Assembly Cover 电缆护套	
	Valve Stem 阀杆	V5-2

17 Series Air Cooled TIG Torches
17系列气冷氩弧焊枪

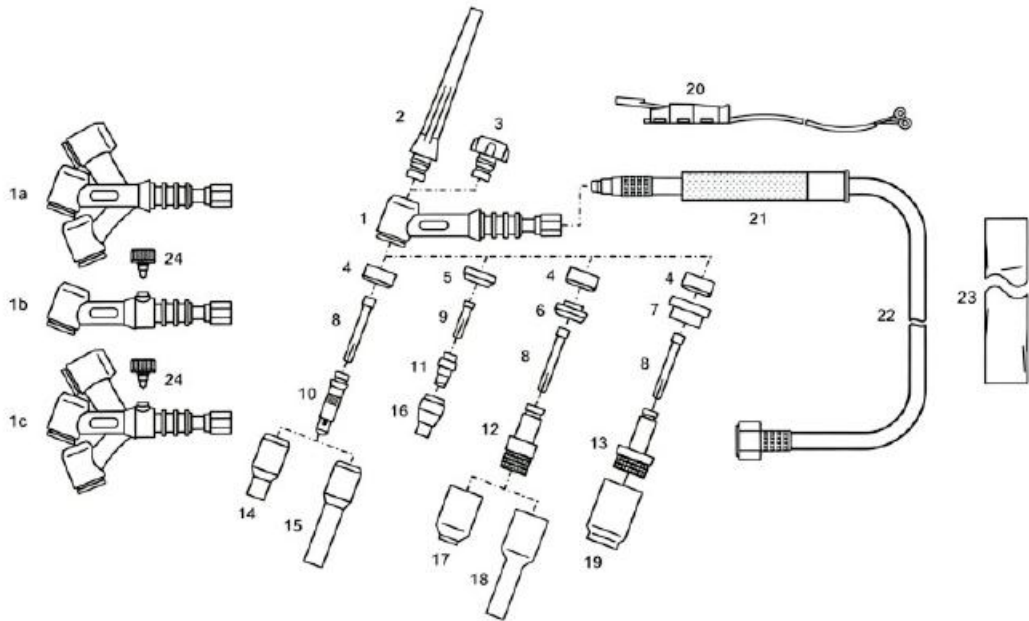


We can supply any cable termination according to customer request
我们可以根据客户需求制作任何形式的接口

技术参数 Technical Data			
额定值 Rating : 150A DC/120A AC 暂载率 Duty Cycle : 100% 钨棒直径 Electrodes : 0.5-2.4mm			
NO.	Description		Standard No.
	WP-17 Torch (Gas and Cable Whole)	WP-17 枪 (气电一体)	WP-17-1 (4M)
	WP-17 Torch (Gas and Cable Whole)	WP-17 枪 (气电一体)	WP-17-1 (8M)
	WP-17 Torch (Gas and Cable Separate)	WP-17 枪 (气电一体)	WP-17-2 (4M)
	WP-17 Torch (Gas and Cable Separate)	WP-17 枪 (气电一体)	WP-17-2 (8M)
1	Torch Body 枪头		WP-17
1a	Torch Body (Flexible) 枪头 (柔性)		WP-17F
1b	Torch Body (Valve) 枪头 (带气阀)		WP-17V
1c	Torch Body (Flexible and Valve) 枪头 (柔性带气阀)		WP-17FV
2	Long Back Cap 长后帽		57Y02
3	Short Back Cap 短后帽		57Y04
4	Gasket 枪头绝缘帽		18CG
5	Stubby Gasket 短绝缘帽		18CG-20
6	Gas Lens Insulator 气筛用绝缘帽		54N01
7	Large Dia. Gas Lens Insulator 大气筛用绝缘帽		54N63
8	Collet 钨极夹		10N21,0.5mm
	Collet 钨极夹		10N22,1.0mm
	Collet 钨极夹		10N23,1.6mm
	Collet 钨极夹		10N23M,2.0mm
	Collet 钨极夹		10N24,2.4mm

9	Stubby Collet	短钨极夹	10N21S,0.5mm
	Stubby Collet	短钨极夹	10N22S,1.0mm
	Stubby Collet	短钨极夹	10N23S,1.6mm
	Stubby Collet	短钨极夹	10N24S,2.0mm
	Stubby Collet	短钨极夹	10N24S,2.4mm
10	Collect Body	连接杆	10N29,0.5mm
	Collect Body	连接杆	10N30,1.0mm
	Collect Body	连接杆	10N31,1.6mm
	Collect Body	连接杆	10N32,2.4mm
11	Stubby Collet Body	短连接杆	17CB20 All Size
12	Medium Gas Lens	中气筛	45V29,0.5mm
	Medium Gas Lens	中气筛	45V24,1.0mm
	Medium Gas Lens	中气筛	45V25,1.6mm
	Medium Gas Lens	中气筛	45V26,2.4mm
13	Large Long Gas Lens	大长气筛	45V116,1.6mm
	Large Long Gas Lens	大长气筛	45V64,2.4mm
14	Ceramic Nozzle	瓷嘴	10N50,6mm
	Ceramic Nozzle	瓷嘴	10N49,8mm
	Ceramic Nozzle	瓷嘴	10N48,10mm
	Ceramic Nozzle	瓷嘴	10N47,11mm
	Ceramic Nozzle	瓷嘴	10N46,13mm
	Ceramic Nozzle	瓷嘴	10N44,19mm
15	Extra Length Ceramic Nozzle	长瓷嘴	10N49L,8mm
	Extra Length Ceramic Nozzle	长瓷嘴	10N48L,10mm
	Extra Length Ceramic Nozzle	长瓷嘴	10N47L,11mm
16	Stubby Ceramic Nozzle	短瓷嘴	13N08,6mm
	Stubby Ceramic Nozzle	短瓷嘴	13N09,8mm
	Stubby Ceramic Nozzle	短瓷嘴	13N10,10mm
	Stubby Ceramic Nozzle	短瓷嘴	13N11,11mm
	Stubby Ceramic Nozzle	短瓷嘴	13N12,13mm
	Stubby Ceramic Nozzle	短瓷嘴	13N13,16mm
17	Ceramic Nozzle	瓷嘴	54N18,6mm
	Ceramic Nozzle	瓷嘴	54N17,8mm
	Ceramic Nozzle	瓷嘴	54N16,10mm
	Ceramic Nozzle	瓷嘴	54N15,11mm
	Ceramic Nozzle	瓷嘴	54N14,13mm
	Ceramic Nozzle	瓷嘴	54N19,17mm
18	Extra Long Ceramic Nozzle	特长瓷嘴	54N17L,8mm
	Extra Long Ceramic Nozzle	特长瓷嘴	54N16L,10mm
	Extra Long Ceramic Nozzle	特长瓷嘴	54N15L,11mm
19	Extra Dia Ceramic Nozzle	特长瓷嘴	57N75,10mm
	Extra Dia Ceramic Nozzle	特长瓷嘴	57N74,13mm
	Extra Dia Ceramic Nozzle	特长瓷嘴	53N88,16mm
	Extra Dia Ceramic Nozzle	特长瓷嘴	53N87,19mm
20	Switch(with wire)	开关 (带控制线)	10S255
21	Handle	手柄	
22	Cable Assembly	电缆组	
23	Cable Assembly Cover	电缆护套	
	Valve Stem	阀杆	VS-2

9 Series Air Cooled TIG Torches
9 系列气冷氩弧焊枪




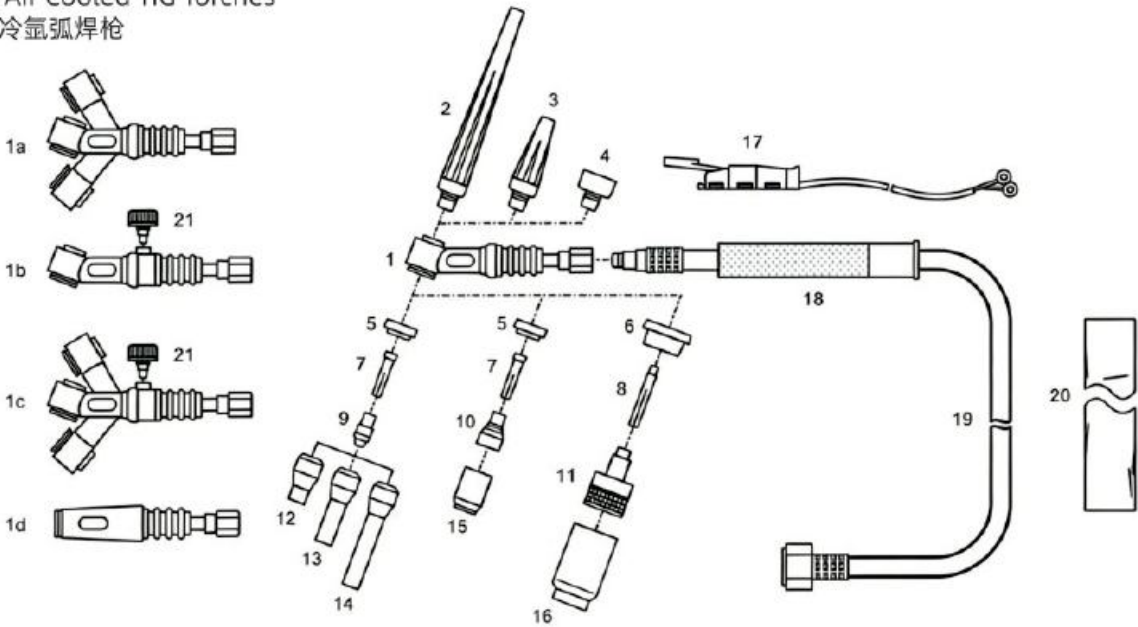


We can supply any cable termination according to customer request
我们可以根据客户需求制作任何形式的接口

技术参数 Technical Data		
额定值 Rating : 125A DC/80A AC 暂载率 Duty Cycle : 60% 钨棒直径 Electrodes : 0.5-2.4 mm		
NO.	Description	Standard No.
	WP-9 Torch (Gas and Cable Whole) WP-9 枪 (气电一体)	WP-9-1 (4M)
	WP-9 Torch (Gas and Cable Whole) WP-9 枪 (气电一体)	WP-9-1 (8M)
	WP-9 Torch (Gas and Cable Separate) WP-9 枪 (气电一体)	WP-9-2 (4M)
	WP-9 Torch (Gas and Cable Separate) WP-9 枪 (气电一体)	WP-9-2 (8M)
1	Torch Body 枪头	WP-9
1a	Torch Body (Flexible) 枪头 (柔性)	WP-9F
1b	Torch Body (Valve) 枪头 (带气阀)	WP-9V
1c	Torch Body (Flexible and Valve) 枪头 (柔性带气阀)	WP-9FV
1d	Torch Body (Pencil) 枪头 (直式)	WP-9P
2	Long Back Cap 长后帽	41V24
3	Medium Back Cap 中后帽	41V35
4	Short Back Cap 短后帽	41V33
5	Gasket 枪头绝缘帽	598882
6	Large Dia.Gas Lens Insulator 大气筛用绝缘帽	54N63-20
7	Collet 钨极夹	13N20,0.5mm
	Collet 钨极夹	13N21,1.0mm
	Collet 钨极夹	13N22,1.6mm
	Collet 钨极夹	13N22M,2.0mm
	Collet 钨极夹	13N23,2.4mm

8	Large Dia.Gas Lens Collet 大气筛用钨极夹	13N20L,0.5mm
	Large Dia.Gas Lens Collet 大气筛用钨极夹	13N22L,1.6mm
	Large Dia.Gas Lens Collet 大气筛用钨极夹	13N23L,2.4mm
9	Collect Body 连接杆	13N25,0.5mm
	Collect Body 连接杆	13N26,1.0mm
	Collect Body 连接杆	13N27,1.6mm
	Collect Body 连接杆	13N27M,2.0mm
	Collect Body 连接杆	13N28,2.4mm
10	Small Gas Lens 小气筛	45V41,0.5mm
	Small Gas Lens 小气筛	45V42,1.0mm
	Small Gas Lens 小气筛	45V43,1.6mm
	Small Gas Lens 小气筛	45V43M,2.0mm
	Small Gas Lens 小气筛	45V44,2.4mm
11	Large Stubby Gas Lens 大短气筛	45V0204S
	Large Stubby Gas Lens 大短气筛	45V116S,1.6mm
	Large Stubby Gas Lens 大短气筛	45V64S,2.4mm
12	Ceramic Nozzle 加长瓷嘴	13N08,6mm
	Ceramic Nozzle 加长瓷嘴	13N09,8mm
	Ceramic Nozzle 加长瓷嘴	13N10,10mm
	Ceramic Nozzle 加长瓷嘴	13N11,11mm
	Ceramic Nozzle 加长瓷嘴	13N12,13mm
	Ceramic Nozzle 加长瓷嘴	13N13,16mm
13	Long Ceramic Nozzle 加长瓷嘴	796F70,5mm
	Long Ceramic Nozzle 加长瓷嘴	796F71,6mm
	Long Ceramic Nozzle 加长瓷嘴	796F72,8mm
	Long Ceramic Nozzle 加长瓷嘴	796F73,10mm
14	Extra Long Ceramic Nozzle 特长瓷嘴	796F74,5mm
	Extra Long Ceramic Nozzle 特长瓷嘴	769F75,6mm
	Extra Long Ceramic Nozzle 特长瓷嘴	796F76,8mm
	Extra Long Ceramic Nozzle 特长瓷嘴	796F77,10mm
15	Ceramic Nozzle 瓷嘴	53N58,6mm
	Ceramic Nozzle 瓷嘴	53N59,8mm
	Ceramic Nozzle 瓷嘴	53N60,10mm
	Ceramic Nozzle 瓷嘴	53N61,11mm
	Ceramic Nozzle 瓷嘴	53N61S,13mm
16	Large Dia.Ceramic Nozzle 大瓷嘴	57N75,10mm
	Large Dia.Ceramic Nozzle 大瓷嘴	57N74,13mm
	Large Dia.Ceramic Nozzle 大瓷嘴	53N88,16mm
	Large Dia.Ceramic Nozzle 大瓷嘴	53N87,19mm
17	Switch(with wire) 开关 (带控制线)	
18	Handle 手把	105Z55
19	Cable Assembly 电缆组	
20	Cable Assembly Cover 电缆护套	
21	Valve Stem 阀杆	V5-2

WP-9,WP- 9F WP- 9FV,WP- 17,WP-17F, WP- 17V,WP-17FV Torch Terminations(Cable and Gas Whole)
WP- 9 系列及 WP-17 系列焊枪接口 (气电一体)

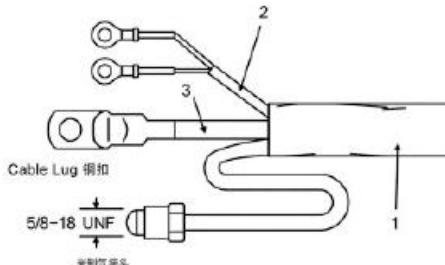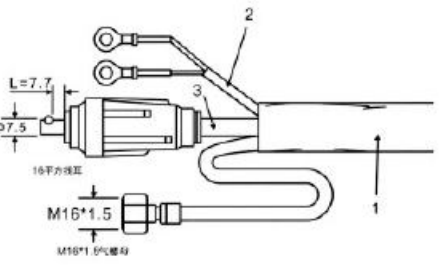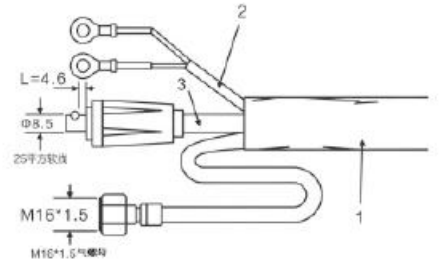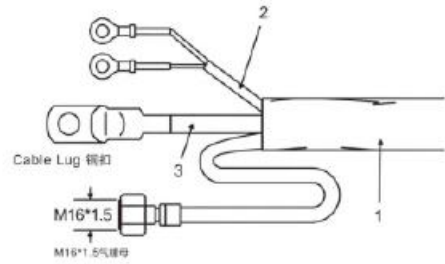





NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5英尺), 塑胶护套 /牛仔布护套
	Cable AssemblyCover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25英尺), 塑胶护套 /牛仔布护套
2	Control Wire 控制线
3	Cable 16mm 4M (12.5fe et) 1 6mm 电缆, 4米 (12.5英尺) Cable 16mm 8M(25teet)1 6mm 电缆, 8米 (25英尺)

NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5英尺), 塑胶护套 /牛仔布护套
	Cable AssemblyCover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25英尺), 塑胶护套 /牛仔布护套
2	Control Wire 控制线
3	Cable 16mm 4M (12.5fe et) 1 6mm 电缆, 4米 (12.5英尺) Cable 16mm 8M(25teet)1 6mm 电缆, 8米 (25英尺)

NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5英尺), 塑胶护套 /牛仔布护套
	Cable AssemblyCover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25英尺), 塑胶护套 /牛仔布护套
2	Control Wire 控制线
3	Cable 16mm 4M (12.5fe et) 1 6mm 电缆, 4米 (12.5英尺) Cable 16mm 8M(25teet)1 6mm 电缆, 8米 (25英尺)

NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5英尺), 塑胶护套 /牛仔布护套
	Cable AssemblyCover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25英尺), 塑胶护套 /牛仔布护套
2	Control Wire 控制线
3	Cable 16mm 4M (12.5fe et) 1 6mm 电缆, 4米 (12.5英尺) Cable 16mm 8M(25teet)1 6mm 电缆, 8米 (25英尺)

WP-18,WP- 18F WP- 18V,WP- 18P,Torch Terminations
WP- 18 系列焊枪接口

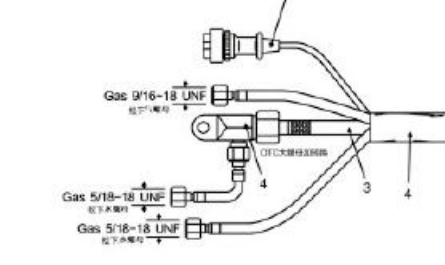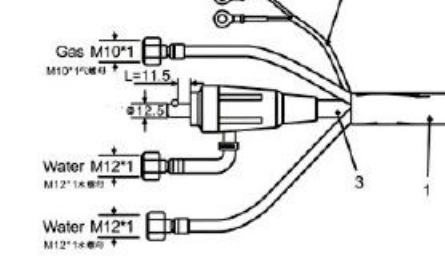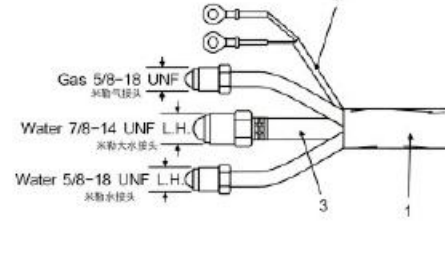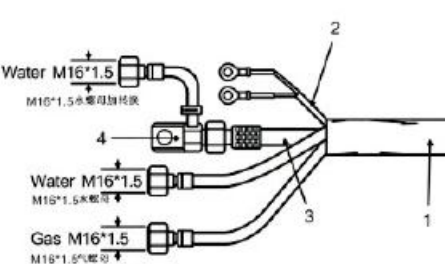


NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5英尺), 塑胶护套 /牛仔布护套
	Cable AssemblyCover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25英尺), 塑胶护套 /牛仔布护套
2	Control Wire 控制线
3	Cable 8mm 4M (12.5fe et) 8mm 电缆, 4米 (12.5英尺) Cable 8mm 8M(25teet) 8mm 电缆, 8米 (25英尺)
4	Cable Adapter 电缆接头

NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5英尺), 塑胶护套 /牛仔布护套
	Cable AssemblyCover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25英尺), 塑胶护套 /牛仔布护套
2	Control Wire 控制线
3	Cable 8mm 4M (12.5fe et) 8mm 电缆, 4米 (12.5英尺) Cable 8mm 8M(25teet) 8mm 电缆, 8米 (25英尺)


NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5英尺), 塑胶护套 /牛仔布护套
	Cable AssemblyCover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25英尺), 塑胶护套 /牛仔布护套
2	Control Wire 控制线
3	Cable 8mm 4M (12.5fe et) 8mm 电缆, 4米 (12.5英尺) Cable 8mm 8M(25teet) 8mm 电缆, 8米 (25英尺)

NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5英尺), 塑胶护套 /牛仔布护套
	Cable AssemblyCover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25英尺), 塑胶护套 /牛仔布护套
2	Plug 2-Pin Panasonic 松下2芯插头
3	Cable 8mm 4M (12.5fe et) 8mm 电缆, 4米 (12.5英尺) Cable 8mm 8M(25teet) 8mm 电缆, 8米 (25英尺)
4	Cable Adapter 电缆接头


WP-20,WP- 20F ,WP-20P Torch Terminations
WP- 20 系列焊枪接口

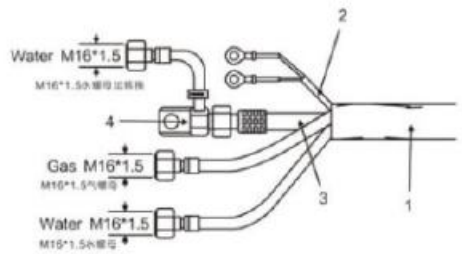


NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5 英尺), 塑胶护套 / 牛仔布护套
	Cable AssemblyCover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25 英尺), 塑胶护套 / 牛仔布护套
2	Control Wire 控制线
3	Cable 4 mm 4M (12.5fe et) 4mm 电缆, 4米 (12.5 英尺) Cable 4 mm 8M(25teet) 4mm 电缆, 8米 (25 英尺)

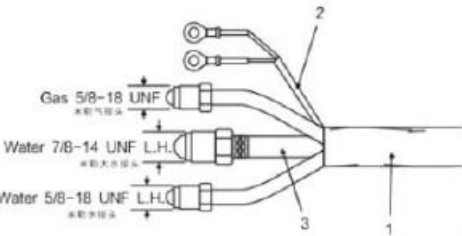

NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5 英尺), 塑胶护套 / 牛仔布护套
	Cable AssemblyCover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25 英尺), 塑胶护套 / 牛仔布护套
2	Control Wire 控制线
3	Cable 4 mm 4M (12.5fe et) 4mm 电缆, 4米 (12.5 英尺) Cable 4 mm 8M(25teet) 4mm 电缆, 8米 (25 英尺)

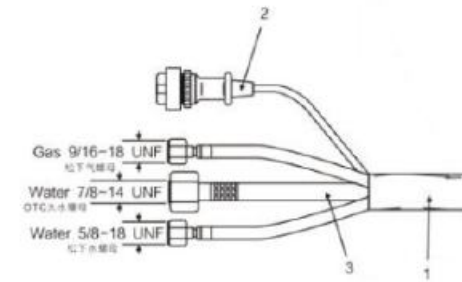


NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5 英尺), 塑胶护套 / 牛仔布护套
	Cable AssemblyCover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25 英尺), 塑胶护套 / 牛仔布护套
2	Control Wire 控制线
3	Cable 4 mm 4M (12.5fe et) 4mm 电缆, 4米 (12.5 英尺) Cable 4 mm 8M(25teet) 4mm 电缆, 8米 (25 英尺)

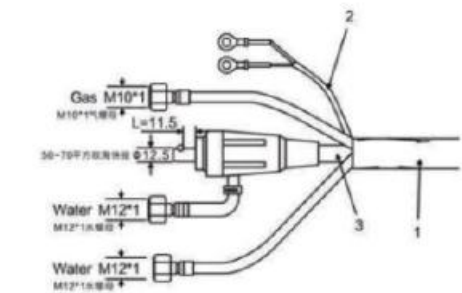


NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5 英尺), 塑胶护套 / 牛仔布护套
	Cable AssemblyCover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25 英尺), 塑胶护套 / 牛仔布护套
2	Control Wire 控制线
3	Cable 4 mm 4M (12.5fe et) 4mm 电缆, 4米 (12.5 英尺) Cable 4 mm 8M(25teet) 4mm 电缆, 8米 (25 英尺)


WP-26,WP- 26F WP- 26V,WP- 26FV,WP-26P Torch Terminations(Cable and Gas Whole)
WP-26 系列焊枪接口 (气电一体)

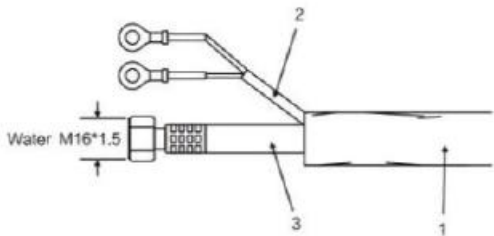


NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5 英尺), 塑胶护套 / 牛仔布护套
	Cable AssemblyCover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25 英尺), 塑胶护套 / 牛仔布护套
2	Control Wire 控制线
3	Cable 12 mm 4M (12.5fe et) 12 mm 电缆, 4米 (12.5 英尺) Cable 12 mm 8M(25teet) 12 mm 电缆, 8米 (25 英尺)

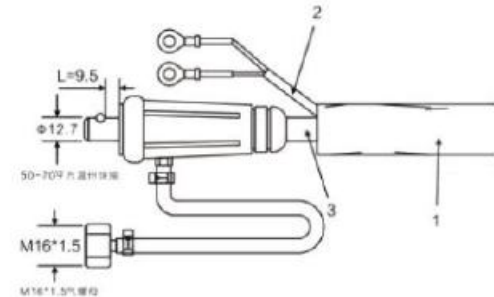

NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5 英尺), 塑胶护套 / 牛仔布护套
	Cable AssemblyCover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25 英尺), 塑胶护套 / 牛仔布护套
2	Control Wire 控制线
3	Cable 12 mm 4M (12.5fe et) 12 mm 电缆, 4米 (12.5 英尺) Cable 12 mm 8M(25teet) 12 mm 电缆, 8米 (25 英尺)

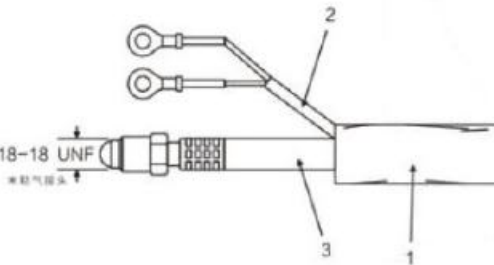


NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5 英尺), 塑胶护套 / 牛仔布护套
	Cable AssemblyCover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25 英尺), 塑胶护套 / 牛仔布护套
2	Control Wire 控制线
3	Cable 12 mm 4M (12.5fe et) 12 mm 电缆, 4米 (12.5 英尺) Cable 12 mm 8M(25teet) 12 mm 电缆, 8米 (25 英尺)

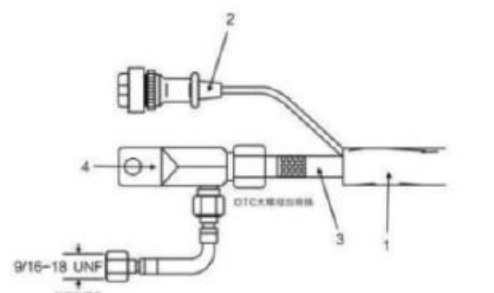


NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5 英尺), 塑胶护套 / 牛仔布护套
	Cable AssemblyCover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25 英尺), 塑胶护套 / 牛仔布护套
2	Plug 2-Pin Panasonic 松下 2 芯插头
3	Cable 12 mm 4M (12.5fe et) 12 mm 电缆, 4米 (12.5 英尺) Cable 12 mm 8M(25teet) 12 mm 电缆, 8米 (25 英尺)
4	Cable Adapter 电缆接头


WP-26,WP- 26F ,WP- 26V,WP- 26FV,WP-26P Torch Terminations(Cable and Gas Separate)
WP-26 系列焊枪接口 (气电分体)

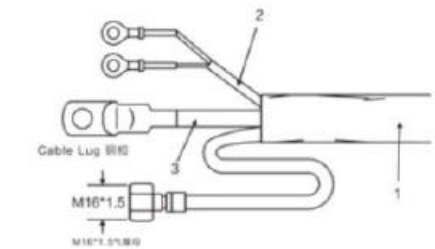

NO.	描述 Description
1	Cable Assembly Cover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5 英尺), 塑胶护套 /牛仔布护套
	Cable Assembly Cover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25 英尺), 塑胶护套 /牛仔布护套
2	Control Wire 控制线
3	Cable 12 mm 4M (12.5fe et) 12 mm 电缆, 4米 (12.5 英尺) Cable 12 mm 8M(25teet) 12 mm 电缆, 8米 (25 英尺)

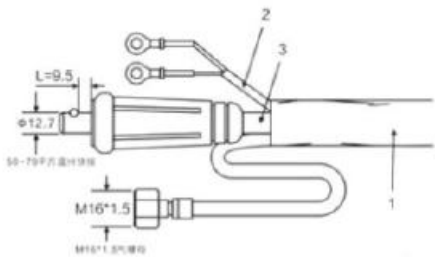


NO.	描述 Description
1	Cable Assembly Cover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5 英尺), 塑胶护套 /牛仔布护套
	Cable Assembly Cover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25 英尺), 塑胶护套 /牛仔布护套
2	Control Wire 控制线
3	Cable 12 mm 4M (12.5fe et) 12 mm 电缆, 4米 (12.5 英尺) Cable 12 mm 8M(25teet) 12 mm 电缆, 8米 (25 英尺)

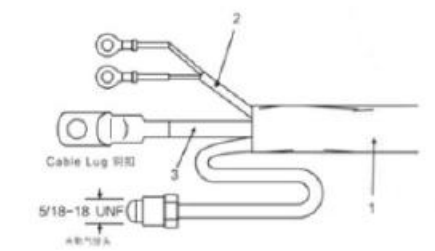


NO.	描述 Description
1	Cable Assembly Cover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5 英尺), 塑胶护套 /牛仔布护套
	Cable Assembly Cover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25 英尺), 塑胶护套 /牛仔布护套
2	Control Wire 控制线
3	Cable 12 mm 4M (12.5fe et) 12 mm 电缆, 4米 (12.5 英尺) Cable 12 mm 8M(25teet) 12 mm 电缆, 8米 (25 英尺)


WP-27 Torch Terminations
WP- 27 系列焊枪接口

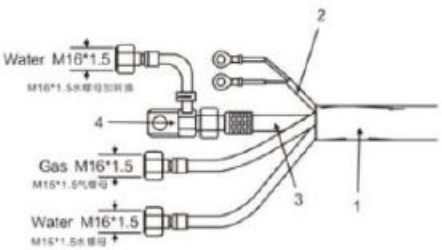


NO.	描述 Description
1	Cable Assembly Cover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5 英尺), 塑胶护套 /牛仔布护套
	Cable Assembly Cover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25 英尺), 塑胶护套 /牛仔布护套
2	Control Wire 控制线
3	Cable 12 mm 4M (12.5fe et) 12 mm 电缆, 4米 (12.5 英尺) Cable 12 mm 8M(25teet) 12 mm 电缆, 8米 (25 英尺)
4	Cable Adapter 电缆接头

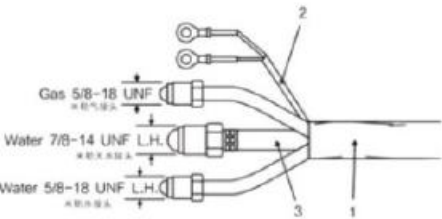

NO.	描述 Description
1	Cable Assembly Cover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5 英尺), 塑胶护套 /牛仔布护套
	Cable Assembly Cover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25 英尺), 塑胶护套 /牛仔布护套
2	Control Wire 控制线
3	Cable 12 mm 4M (12.5fe et) 12 mm 电缆, 4米 (12.5 英尺) Cable 12 mm 8M(25teet) 12 mm 电缆, 8米 (25 英尺)




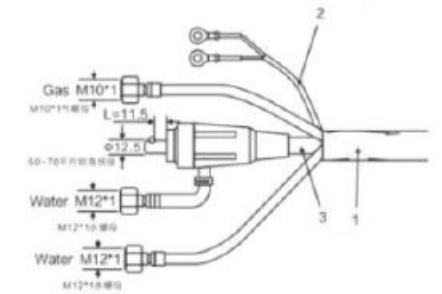


NO.	描述 Description
1	Cable Assembly Cover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5 英尺), 塑胶护套 /牛仔布护套
	Cable Assembly Cover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25 英尺), 塑胶护套 /牛仔布护套
2	Control Wire 控制线
3	Cable 12 mm 4M (12.5fe et) 12 mm 电缆, 4米 (12.5 英尺) Cable 12 mm 8M(25teet) 12 mm 电缆, 8米 (25 英尺)


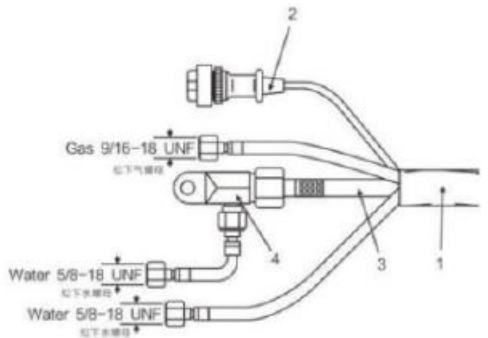




NO.	描述 Description
1	Cable Assembly Cover.For 4 M (12.5feet).Rubber/Jean 电缆外套, 4米, (12.5 英尺), 塑胶护套 /牛仔布护套
	Cable Assembly Cover.For 8 M (25feet).Rubber/Jean 电缆外套, 8米, (25 英尺), 塑胶护套 /牛仔布护套
2	Plug 2-Pin Panasonic 松下 2芯插头
3	Cable 12 mm 4M (12.5fe et) 12 mm 电缆, 4米 (12.5 英尺) Cable 12 mm 8M(25teet) 12 mm 电缆, 8米 (25 英尺)
4	Cable Adapter 电缆接头

Ceramic Nozzle
瓷嘴

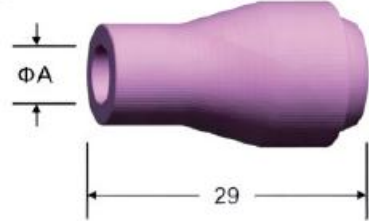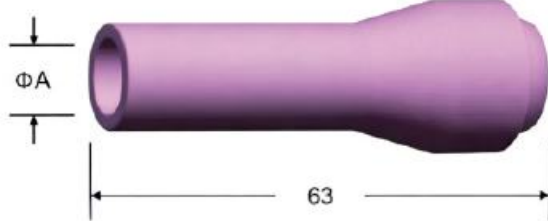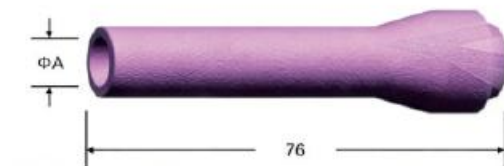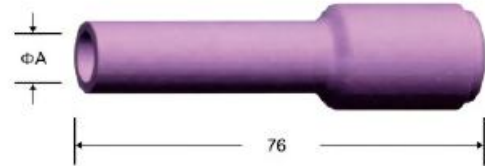									
ΦA				ΦA					
29				63					
Part NO.	mm	(Inches)	Size	Torches	Part NO.	mm	(Inches)	Size	Torches
13N08	6	1/4	4	9 Series 20 Series	796F74	5	0.165	3	9 Series 20 Series
13N09	8	5/16	5		796F75	6	1/4	4	
13N10	10	3/8	6		796F76	8	5/16	5	
13N11	11	7/16	7		796F77	10	3/8	6	
13N12	13	1/2	8						
13N13	16	5/8	10						
									
ΦA				ΦA					
76				47					
Part NO.	mm	(Inches)	Size	Torches	Part NO.	mm	(Inches)	Size	Torches
796F70	5	0.165	3	9 Series 20Series	10N50	6	1/4	4	9 Series 20 Series 26 Series
796F71	6	1/4	4		10N49	8	5/16	5	
796F72	8	5/16	5		10N48	10	3/8	6	
796F73	10	3/8	6		10N47	11	7/16	7	
					10N46	13	1/2	8	
					10N45	16	5/8	10	
					10N44	19	3/4	12	
									
ΦA									
76									
Part NO.	mm	(Inches)	Size	Torches					
10N49L	8	5/16	5L	17 Series 18 Series 26 Series					
10N48L	10	3/8	6L						
10N47L	11	7/16	7L						

Ceramic Nozzle
瓷嘴

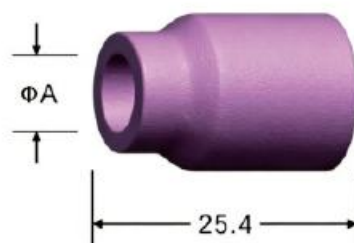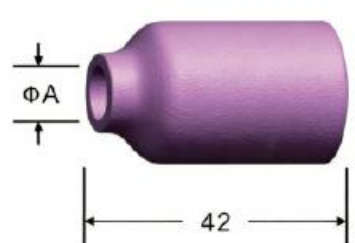									
ΦA				ΦA					
25.4				42					
	ΦA					ΦA			
Part NO.	mm	(Inches)	Size	Torches	Part NO.	mm	(Inches)	Size	Torches
53N58	6	1/4	4	9 Series 20 Series	54N18	6	1/4	4	17 Series 18 Series 26 Series
53N59	8	5/16	5		54N17	8	5/16	5	
53N60	10	3/8	6		54N16	10	3/8	6	
53N61	11	7/16	7		54N15	11	7/16	7	
53N61S	11	7/16	short		54N14	13	1/2	8	
					54N19	18	11/16	short	

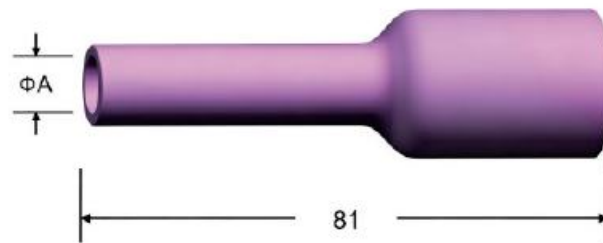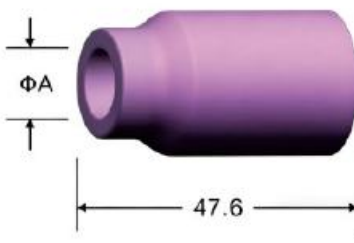
									
ΦA				ΦA					
81				47.6					
	ΦA					ΦA			
Part NO.	mm	(Inches)	Size	Torches	Part NO.	mm	(Inches)	Size	Torches
54N17L	8	5/16	5L	17 Series 18 Series 26 Series	57N75	10	3/3	6	9 Series 17 Series 18 Series 26 Series 27 Series
54N16L	10	3/8	6L		57N74	13	1/3	8	
54N15L	11	7/16	7L		57N88	16	5/8	10	
					57N87	19	3/4	12	
					5N89		short		

Collets Collet Bodies&Gas Lenses
钨极夹，连接杆及气筛

											
Collet 钨极夹			Collet 钨极夹			Collet 钨极夹					
Part NO.	Bore		Torches	Part NO.	Bore		Torches	Part NO.	Bore		Torches
	mm	(Inches)			mm	(Inches)			mm	(Inches)	
10N21	0.5	0.020	17 Series 18 Series 26 Series	10N22 S	1.0	0.040	17 Series 18 Series 26 Series	13N20	0.5	0.020	9 Series 20 Series
10N22	1.0	0.040		10N23 S	1.6	1/16		13N20	1.0	0.040	
10N23	1.6	1/16		10N24 S	2.4	3/32		13N20	1.6	1/16	
10N24	2.4	3/32		10N25 S	3.2	1/8		13N20	2.0	5/64	
10N25	3.2	1/8						13N20	2.4	3/32	
10N26	4.0	5/32						13N20	3.2	1/8	
											
Collet 钨极夹			Collet 钨极夹								
Part NO.	Bore		Torches	Part NO.	Bore		Torches				
	mm	(Inches)			mm	(Inches)					
13N20	0.5	0.020	9 Series 20 Series	57N45	1.0	0.040	27 Series				
13N21	1.0	0.040		57N46	1.6	1/16					
13N22	1.6	1/16		57N47	2.4	3/32					
13N23	2.4	3/32		57N48	3.2	1/8					
13N24	3.2	1/8		57N49	4.0	5/32					
				57N50	4.8	3/16					
				57N51	6.4	1/4					
											
Collet Body 连接杆			Collet Body 连接杆			Collet Body 连接杆					
Part NO.	Bore		Torches	Part NO.	Bore		Torches	Part NO.	Bore		Torches
	mm	(Inches)			mm	(Inches)			mm	(Inches)	
10N29	0.5	0.020	17 Series 18 Series 26 Series	17CB20	All	Sizes	17 Series 18 Series 26 Series	13N25	0.5	0.020	9 Series 20 Series
10N30	1.0	0.040						13N26	1.0	0.040	
10N31	1.6	1/16						13N27	1.6	1/16	
10N32	2.4	3/32						13N28	2.0	3/32	
10N28	3.2	1/8						13N29	2.4	1/8	
406488	4.0	5/32									

Collets Collet Bodies&Gas Lenses
钨极夹，连接杆及气筛

							
Medium Gas Lens 小气筛			Medium Gas Lens 小气筛				
Part NO.	Bore		Torches	Part NO.	Bore		Torches
	mm	(Inches)			mm	(Inches)	
45V41	0.5	0.020	9 Series 20 Series	45V29	0.5	0.020	17 Series 18 Series 26 Series
45V42	1.0	0.040		45V24	1.0	0.040	
45V43	1.6	1/16		45V25	1.6	1/16	
45V44	2.4	3/32		45V26	2.4	3/32	
45V45	3.2	1/8		45V27	3.2	1/8	
				45V28	4.0	5/32	

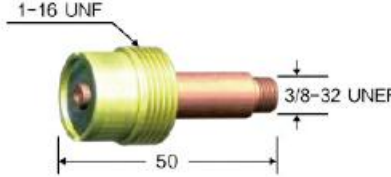							
Large Long Gas Lens 大长气筛			Large Stubby Gas Lens 小气筛				
Part NO.	Bore		Torches	Part NO.	Bore		Torches
	mm	(Inches)			mm	(Inches)	
45V116	0.5	0.020	17 Series 18 Series 26 Series	45V116S	0.5	0.020	9 Series 20 Series
	1.0	0.040			1.0	0.040	
	1.6	1/16			1.6	1/16	
45V64	2.4	3/32		45V64S	2.4	3/32	
995795	3.2	1/8		995795S	3.2	1/8	
45V63	4.0	5/32					

			
Part NO.	Bore		Torches
	mm	(Inches)	
49V22	1.0	0.040	27 Series
49V23	1.6	1/16	
49V24	2.4	3/32	
49V25	3.2	1/8	
49V26	4.0	5/32	
49V27	4.8	3/16	
49V28	6.4	1/4	

Back Caps&Valve Stems
后帽及阀杆



Back Cap 后帽			Back Cap 后帽			Back Cap 后帽		
Part NO.	Description	Torches	Part NO.	Description	Torches	Part NO.	Description	Torches
41V33	Short With O-ring	9 Series 20 Series	41V35	Medium With O-ring	9 Series 20 Series	41V24	Long With O-ring	9 Series 20 Series



Back Cap 后帽			Back Cap 后帽			Back Cap 后帽		
Part NO.	Description	Torches	Part NO.	Description	Torches	Part NO.	Description	Torches
57Y04	Short With O-ring	17 Series 18 Series 26 Series	57Y20	Long With O-ring	17 Series 18 Series 26 Series	41V24	Medium With O-ring	17 Series 18 Series 26 Series




Valve Stems 阀杆			Valve Stems 阀杆		
Part NO.	Description	Torches	Part NO.	Description	Torches
VS-1	Valve Stem With O-ring	26 Series	VS-2	Valve Stem With O-ring	9 Series 17 Series 18 Series


Normal Torch Terminations
常规焊枪接口

Please indicate the length,torch termination and cable cover type,when ordering complete torch
请在订购整枪时注明所需整枪长度，焊枪接口及护套的种类


WP-9,WP- 9F WP- 9FV,WP- 17,WP-17F WP- 17V,WP-17FV Torch T erminations(C able and Gas Whole)
WP- 9 系列及 WP-17 系列焊枪接口（气电一体）

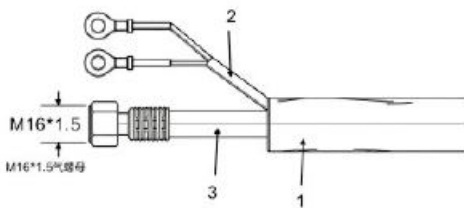

NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套， 4米，（ 12.5 英尺）， 塑胶护套 / 牛仔布护套
2	Control Wire 控制线
3	Cable10mm 4M (12.5fe et)10mm 电缆， 4米（ 12.5 英尺） Cable 10mm 8M(25teet)10mm 电缆， 8米（ 25 英尺）

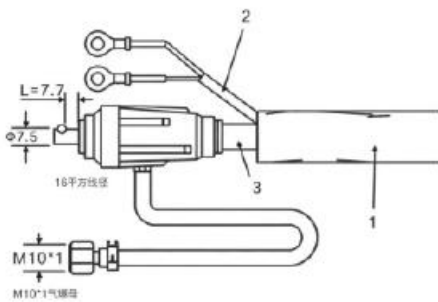

NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套， 4米，（ 12.5 英尺）， 塑胶护套 / 牛仔布护套
2	Control Wire 控制线
3	Cable10mm 4M (12.5fe et)10mm 电缆， 4米（ 12.5 英尺） Cable 10mm 8M(25teet)10mm 电缆， 8米（ 25 英尺）

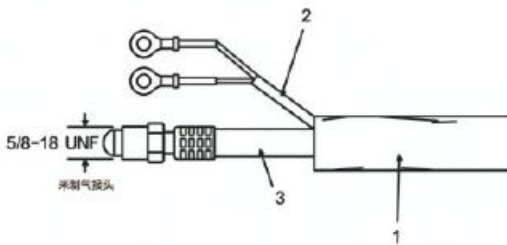

NO.	描述 Description
1	Cable AssemblyCover.For 4 M (12.5feet).Rubber/Jean 电缆外套， 4米，（ 12.5 英尺）， 塑胶护套 / 牛仔布护套
2	Control Wire 控制线
3	Cable10mm 4M (12.5fe et)10mm 电缆， 4米（ 12.5 英尺） Cable 10mm 8M(25teet)10mm 电缆， 8米（ 25 英尺）

Carbon ARC Gouging Torch
碳弧气刨枪



Stud Welding Torch
螺柱焊枪



Wire Feeder
送丝机



ORK-10A 型送丝机, 适用于欧式 ORK-10A Wire Feeder For Euro	
技术参数 Technical Data	
送丝电压 Wire Feed Voltage	DC24V/DC18.3V
额定电流 Rated Current	5A/5.5A
送丝速度 Wire Feed Speed Range	1.5-15M/min/2.0-20M/min
适用丝径 Wire Size Range	Φ0.8- 2.4 mm
焊丝重量 Wire Spool Capacity	20kg(Φ300 *Φ50 *103) mm
外形尺寸 Overall Dimension	(423 *194 *323) mm
整体重量 Net Weight	9kg
适用焊枪 Torch Interface	欧式焊枪 Euro Torch



ORK-10T 型送丝机, 适用于欧式 ORK-500A Wire Feeder For Euro	
技术参数 Technical Data	
送丝电压 Wire Feed Voltage	DC24V/DC42V
额定电流 Rated Current	3A/3.5A
送丝速度 Wire Feed Speed Range	2-18M/min/2.0-20M/min
适用丝径 Wire Size Range	Φ0.8- 2.4 mm
焊丝重量 Wire Spool Capacity	20kg(Φ300 *Φ50 *103) mm
外形尺寸 Overall Dimension	(420 *190 *250) mm
整体重量 Net Weight	7kg
适用焊枪 Torch Interface	欧式焊枪 Euro Torch

Wire Feeder
送丝机



ORK-10C 封闭式送丝机, 适用于欧式 ORK-10C Closed Wire Feeder For Euro	
技术参数 Technical Data	
送丝电压 Wire Feed Voltage	DC24V/DC18.3V
额定电流 Rated Current	5A/5.5A
送丝速度 Wire Feed Speed Range	1.5-15M/min/2.0-20M/min
适用丝径 Wire Size Range	Φ0.8- 2.4 mm
焊丝重量 Wire Spool Capacity	20kg(Φ300 *Φ50 *103) mm
外形尺寸 Overall Dimension	(615 *400 *245) mm
整体重量 Net Weight	14kg
适用焊枪 Torch Interface	欧式焊枪 Euro Torch



ORK-10H 封闭式送丝机, 适用于欧式 ORK-10H Closed Wire Feeder For Euro	
技术参数 Technical Data	
送丝电压 Wire Feed Voltage	DC24V/DC18.3V
额定电流 Rated Current	3A/3.5A
送丝速度 Wire Feed Speed Range	1.5-18M/min
适用丝径 Wire Size Range	Φ0.8- 2.4 mm
焊丝重量 Wire Spool Capacity	20kg(Φ300 *Φ50 *103) mm
外形尺寸 Overall Dimension	(460 *200 *280) mm
整体重量 Net Weight	12kg
适用焊枪 Torch Interface	欧式焊枪 Euro Torch

Wire Feeder
送丝机



ORK-350A 送丝机, 适用于松下 ORK-350A Wire Feeder For Panasonic	
技术参数 Technical Data	
送丝电压 Wire Feed Voltage	DC24V/DC18.3V
额定电流 Rated Current	5A/5.5A
送丝速度 Wire Feed Speed Range	1.5-15M/min/2.0-20M/min
适用丝径 Wire Size Range	Φ0.8- 1.6mm(实芯 Solid core d/ 药芯 Flux cored)
焊丝重量 Wire Spool Capacity	20kg(Φ300 *Φ50 *103) mm
外形尺寸 Overall Dimension	(460 *200 *280) mm
整体重量 Net Weight	9kg
适用焊枪 Torch Interface	松下焊枪 Panasonic Torch

Wire Feeder
送丝机



送丝机, 适用于欧式 Wire Feeder For Euro Style	
技术参数 Technical Data	
送丝电压 Wire Feed Voltage	DC24V/DC18.3V
电磁阀电压 Gas Valve Voltage	DC24V/DC36V
焊丝直径 Wire Diameter (mm)	0.8/1.0/1.2/1.6
适用丝类型 Wire Type	软钢 Soft Steel/ 实芯 Solid Wire
送丝速度范围 Wire Feeding Speed	1.5- 15M/min/2.0- 20M/min
适用焊丝盘 Wire Spool	Φ300 *Φ50 *103mm
焊丝盘最大容量 Max Capacity Of Wire Spool	20kg
额定牵引力 Rated Drawing Force	10kg
整体重量 Net Weight	9kg
体积 Dimensions	460 *200 *280mm
适用焊枪 Torch Interface	欧式焊枪 Euro Torch



ORK-500A 送丝机, 适用于松下 ORK-500A Wire Feeder For Panasonic	
技术参数 Technical Data	
送丝电压 Wire Feed Voltage	DC24V/DC18.3V
额定电流 Rated Current	5A/5.5A
送丝速度 Wire Feed Speed Range	1.5-15M/min/2.0-20M/min
适用丝径 Wire Size Range	Φ0.8- 1.6mm(实芯 Solid core d/ 药芯 Flux cored)
焊丝重量 Wire Spool Capacity	20kg(Φ300 *Φ50 *103) mm
外形尺寸 Overall Dimension	(460 *200 *280) mm
整体重量 Net Weight	9kg
适用焊枪 Torch Interface	松下焊枪 Panasonic Torch



送丝机, 适用于南韩 Wire Feeder For South Korea	
技术参数 Technical Data	
送丝电压 Wire Feed Voltage	DC24V/DC18.3V
电磁阀电压 Gas Valve Voltage	DC24V/DC36V
焊丝直径 Wire Diameter (mm)	0.8/1.0/1.2/1.6
适用丝类型 Wire Type	软钢 Soft Steel/ 实芯 Solid Wire
送丝速度范围 Wire Feeding Speed	1.5- 15M/min
适用焊丝盘 Wire Spool	Φ300 *Φ50 *103mm
焊丝盘最大容量 Max Capacity Of Wire Spool	20kg
额定牵引力 Rated Drawing Force	10kg
整体重量 Net Weight	9kg
体积 Dimensions	460 *200 *280mm
适用焊枪 Torch Interface	南韩焊枪 South Korea Torch

Genuine Parts For Wire Feeder
送丝机构纯正部件



送丝机架
Wire Feeder Bracket



-200A 托架, 适用于松下
SRP- 200A Wire Feeder Bracket for Panasonic



-350A 托架, 适用于松下
-350A Wire Feeder Bracket for Panasonic



-500A 托架, 适用于松下
-500A Wire Feeder Bracket for Panasonic



- 500A 托架, 适用于松下
- 500A Wire Feeder Bracket for Panasonic



托架, 适用于南韩
Wire Feeder Bracket for South Korea



单轴双驱托架
Single Shaft Double Driven Bracket



单轴双驱托架
Single Shaft Double Driven Bracket



双轴双驱托架
Double Shaft Double Driven Bracket



电机总成, 适用于松下
Motor Assembly for Panasonic



立式电机总成
PMDC Motor Assembly

Genuine Parts For Wire Feeder
送丝机构纯正部件



200 遥控盒, 适用于 OTC
200 Remote Controller for OTC



-CPVE350 遥控盒, 适用于 OTC
-CPVE350 Remote Controller For OTC



-350 遥控盒, 适用于松下
-350 Remote Controller for Panasonic



LD 630 遥控盒, 适用于松下
LD-630 Remote Controller for Panasonic



原装遥控盒, 适用于松下
Original Remote Controller for Panasonic



数字 遥控盒, 适用于松下
Digital Remote Controller for Panasonic



逆变遥控盒
Inverter Remote Controller



电磁阀 24V
Electormagnetil Valve 24V



电磁阀, 适用于松下
Electormagnetil Valve for Panasonic



压臂, 适用于 OTC
Pressure Arm for OTC



压臂, 适用于松下
Pressure Arm for Panasonic



出丝咀
Outlet Tip for Wire Feeder



手柄, 适用于松下
Handle for Panasonic



手柄, 适用于 OTC
Handle for OTC



转换接头, 适用于松下转欧式
Connector for Panasonic to Euro style

Genuine Parts For Wire Feeder
送丝机构纯正部件

		
高三孔阻尼轴 High Third Holes Wire Feeder Bracket (Damped Shaft)	中三孔阻尼轴 Middle Third Holes Wire Feeder Bracket (Damped Shaft)	低三孔阻尼轴 Low Third Holes Wire Feeder Bracket (Damped Shaft)
		
平四孔阻尼轴 Flat Four Holes Wire Feeder Bracket (Damped Shaft)	斜四孔阻尼轴 Oblique Four Holes Wire Feeder Bracket (Damped Shaft)	四孔阻尼轴 OTC Four Holes Wire Feeder Bracket (Damped Shaft) OTC
		
1kg 阻尼轴 1kg Wire Feeder Bracket (Damped Shaft)	5kg 阻尼轴 A 5kg Wire Feeder Bracket A (Damped Shaft A)	5kg 阻尼轴 B 5kg Wire Feeder Bracket B (Damped Shaft B)
		
三孔欧式盘轴 Third Holes Bracket (Damped Shaft)	两孔欧式盘轴 Two Holes Feeder Bracket A (Damped Shaft A)	铝轴，适用于松下 Reel Shaft for Panasonic
		
欧式主体 135mm Euro main body 135mm	欧式主体 84 mm Euro main body 84mm	欧式主体 115mm Euro main body 115mm

Genuine Parts For Wire Feeder
送丝机构纯正部件

		
松下转 OTC 主体 Panasonic to OTC Main Body	OTC 主体 OTC Main Body	欧式主体 90mm Euro Main Body 90mm
		
6方欧式主体 6Party Euro Entity	10A 单驱松下主体 10A Single Drive Panasonic Main Body	10H 双驱松下主体 10A Double Drive Panasonic Main Body
		
10T-10C 双驱松下主体 10T-10C Double Drive Panasonic Main Body	欧式法兰 A Euro Flange A	欧式法兰 B Euro Flange B
		
欧式法兰 C Euro Flange C	欧式法兰 D Euro Flange D	欧式法兰 E Euro Flange E
		
欧式法兰 F Euro Flange F	电磁阀 Solenoid Valve	电磁阀 Solenoid Valve
		
电磁阀 Solenoid Valve	电磁阀 Solenoid Valve	电磁阀 Solenoid Valve

Control Wire Blugs
控制线插头



Part NO.	Description	Part NO.	Description	Part NO.	Description
ORK-CT001	Pana Small 2-Pin Plug	ORK-CT002	Pana Small 3-Pin Plug	ORK-CT003	Pana 2-Pin Plug



Part NO.	Description	Part NO.	Description	Part NO.	Description
ORK-CT004	2-Pin Plug	ORK-CT005	5-Pin Plug	ORK-CT006	7-Pin Plug



Part NO.	Description	Part NO.	Description	Part NO.	Description
ORK-CT007	Miller 2-Pin Plug	ORK-CT008	7-Pin Plug	ORK-CT009	10-Pin Plug

Control Wire Blugs
控制线插头



Part NO.	Description	Part NO.	Description	Part NO.	Description
ORK-CT010	7-Pin Plug	ORK-CT011	14-Pin Plug	ORK-CT012	2-Pin Aviation Plug



Part NO.	Description	Part NO.	Description
ORK-CT013	4-Pin Aviation Plug	ORK-CT014	6-Pin Plug



Part NO.	Description	Part NO.	Description	Part NO.	Description
ORK-CT015	7-Pin Aviation Plug	ORK-CT005	5-Pin Plug	ORK-CT016	9-Pin Aviation Plug

Feeder Roller Series
送丝轮

	ORK-001 送丝轮 40*10*20. 适用于松下 Wire Feeder Roller 40 *10*20 , Compatible parts for Panasonic		ORK-002 数字送丝轮 42.5 *8*16. 适用于松下 Digital Wire Feeder Roller 42.5 *8*16,Compatible parts for Panasonic
	ORK-003 数字压丝轮 40 *8*16. 适用于松下 Digital Wire Feeder Pressure Roller 40 *8*16,Compatible parts for Panasonic		ORK-004 主动轮 42.5 *10*18, 适用于松下 Wire Feeder Roller 42.5 *10*18,Compatible parts for Panasonic
	ORK-005 送丝轮 40*20*10, 适用于 OTC Wire Feeder Roller 40 *20*10 , Compatible parts for OTC		ORK-006 龙门焊送丝轮 52 *18*25, 适用于 OTC Wire Feeder Roller 52 *18*25,Compatible parts for OTC
	ORK-007 送丝轮 30*22*10, 适用于宾采尔 Wire Feeder Roller 30 *22*10 , Compatible parts for Binzel		ORK-008 送丝轮 35 *25*8, 适用于宾采尔 Wire Feeder Roller 35 *25*8,Compatible parts for Binzel
	ORK-009 双驱动送丝轮 36 *10*11 Two Drive Wire Feeder Roller 36*10*11		ORK-010 双驱动从动轮 40 *10*12 Two Drive Wire Feeder Roller 40*10*12
	ORK-011 送丝轮 42.5 *22*14.3, 适用于米勒 Wire Feeder Roller 42.5 *22*14.3,Compatible parts for Miller		ORK-012 从动齿轮 42.5 *22*14.3, 适用 于米勒 Wire Feeder Roller Gear 42.5 *22*14.3,Compatible parts for Miller
	ORK-013 送丝轮 43.8 *16*7.1. 适用于林肯 Wire Feeder Roller 43.8 *16*7.1,Compatible parts for Lincoln		ORK-014 送丝轮 44.5 *28*13. 适用于林肯 Wire Feeder Roller 44.5 *28*13,Compatible parts for Lincoln

Feeder Roller Series
送丝轮

	ORK-015 埋弧 焊送丝轮 43.5 *19*7.1. 适用于林肯 Submerged Arc welding Wire FeederRoller 43.5 *19*7.1 , Compatible parts for Lincoln		ORKSRP-016 送丝轮 37*19*12. 适用于飞马特 Wire Feeder Roller37 *19*12 Compatible parts for Thermadyne
	ORK-017 主动轮 40 *10*19, 适用于飞马特 Wire Feeder Roller40 *10*19 , Compatible parts for Thermadyne		ORK-018 从动齿轮 40 *8*20. 适用于 飞马 特 Driven Gear Feeder Roller 40 *8*20,Compatible parts for Thermadyne
	ORK-019 送丝轮 42.5 *16*20, 适用于大电 Wire Feeder Roller 42.5 *16*20,Compatible parts for Dadian		ORK-020 送丝轮 54 *10*25, 适用于肯比 Wire Feeder Roller 54 *10*25 , Compatible parts for Kemppi
	ORK-021 双驱动送丝轮 36 *10*20, 适用于肯比 Two Drive Wire Feeder Roller 36 *10*20,Compatible parts for Kemppi		ORK-022 送丝轮 (上) 36 *10*18. 适用于肯比 Wire Feeder Roller(Upper)36 *10*18,Compatible parts for Kemppi
	ORK-023 送丝轮 (下)36 *10*18, 适用于肯比 Wire Feeder Roller (Low) 36 *10*18,Compatible parts for Kemppi		ORK-024 送丝轮 30 *14*12. 适用于萨福 Wire Feeder Roller 30 *14*12,Compatible parts for SAF
	ORK-025 送丝轮 40 *16*35, 适用于南韩 Wire Feeder Roller 40 *16*35 , Compatible parts for South Korea		ORK-026 送丝轮 34.5 *10*20. 适用于福尼斯 Wire Feeder Roller 34.5 *10*20 , Compatible parts for Fronius
	ORK-027 喷漆送丝轮 47 *10*17 Wire Feeder Roller 47 *10*17 Zinc Spray		ORK-028 送丝轮 30 *10*18, 适用于伊萨 Wire Feeder Roller 30 *10*18,Compatible parts for Esab

Feeder Roller Series
送丝轮

	ORK-029 埋弧焊送丝轮 50*16*20 适用于伊萨 Submerged Arc welding Wire Feeder Roller 50 *16*20,Comptible parts for Esab		ORK-030 送丝轮 40*19*12. 适用于克鲁斯 Wire Feeder Roller 40*19*12,Comptible parts for Cloos
	ORK-031 从动轮 41*8*19, 适用于克鲁斯 Wire Feeder Roller 41 *8*19, Comptible parts for Cloos		ORK-032 送丝轮 33*8*18, 适用于安川 5代 Wire Feeder Roller 33 *8*18 Comptible parts for Anchuan 5 Generation
	ORK-033 送丝轮 30*14*12, 适用于安川 Wire Feeder Roller 30 *14*12, Comptible parts for Yaskawa		ORK-034 K型送丝轮 30*14*12. 适用于安川 Wire Feeder Roller K Groove 30*14*12,Comptible parts for Yaskawa
	ORK-035 主动轮 33*10*19, 适用于安川 Wire Feeder Roller 33 *10*19, Comptible parts for Yaskawa		ORK-036 埋弧焊送丝轮 40*14*12, 适用于 振康 Submerged Arc welding Wire Feeder Roller 40 *14*12, Comptible parts for Zhenkang
	ORK-037 埋弧焊从动轮 44*14*14, 适用于 振康 Submerged Arc welding Wire Feeder Roller 44 *14*14, Comptible parts for Zhenkang		ORK-038 埋弧焊主动轮 44*17*18.5. 适用 振康 Submerged Arc welding Wire Feeder Roller 44 *17*18.5. Comptible parts for Zhenkang
	ORK-039 送丝轮 37*19*12, 适用于雷姆 Wire Feeder Roller 37*19*12,Comptible parts for Rem		ORK-040 送丝轮 44*10*18 Wire Feeder Roller 44 *10*18
	ORK-041 送丝轮 40*32*10 Wire Feeder Roller 40 *32*10		ORK-042 送丝轮 41.5*25.5*14.2, 适用于豪伯特 Wire Feeder Roller 41.5*25.5*14.2. Comptible parts for Haobot

Feeder Roller Series
送丝轮

	ORK-043 送丝轮 29.5*8*18 Wire Feeder Roller 29.5 *8*18		ORK-044 自动焊送丝轮 30*12*13 Automatic welding Wire Feeder Roller 30 *12*13
	ORK-045 主动轮 37*12*16.5 Wire Feeder Roller 37 *12*16.5		ORK-046 送丝轮 41.5*12*10 Wire Feeder Roller 41.5 *12*10
	ORK-047 送丝轮 38*10*20, 适用于米加尼克 Wire Feeder Roller 38*10*20,Comptible parts for Migatronic		ORK-048 埋弧焊送丝轮 44*24*8 Submerged Arc welding Wire Feeder Roller 44 *24*8
	ORK-049 送丝轮 40*28*10 Wire Feeder Roller 40 *28*10		ORK-050 送丝轮 44*9*13 Wire Feeder Roller 44 *9*13
	ORK-051 Boc 送丝轮 29*9.7*12 Wire Feeder Roller 29*9.7*12,Comptible parts for Boc		ORK-052 送丝轮 38*23*16 Wire Feeder Roller 38 *23*16
	ORK-053 送丝轮 29*9.7*12 Wire Feeder Roller 29 *9.7*12		ORK-054 Butter 送丝轮 30*14*14 Butter Wire Feeder Roller 30*14*14

Liner
送丝软管



Compatible Parts For European Style
兼容配件适用于欧式



送丝软管, 适用焊丝	Φ0.8-1.0-1.2-1.6,3.5	米	Liner , For Wire	Φ0.8-1.0-1.2-1.6,3.5M
送丝软管, 适用焊丝	Φ0.8-1.0-1.2-1.6,5.5	米	Liner , For Wire	Φ0.8-1.0-1.2-1.6,5.5M



Compatible Parts For Binzel
兼容配件适用于宾采尔



送丝软管, 适用焊丝	Φ0.8-1.0-1.2-1.6,3.5	米	Liner , For Wire	Φ0.8-1.0-1.2-1.6,3.5M
送丝软管, 适用焊丝	Φ0.8-1.0-1.2-1.6,5.5	米	Liner , For Wire	Φ0.8-1.0-1.2-1.6,5.5M



Compatible Parts For Panasonic
兼容配件适用于松下



送丝软管, 适用焊丝	Φ0.8-1.0-1.2-1.6,3.5	米	Liner , For Wire	Φ0.8-1.0-1.2-1.6,3.5M
送丝软管, 适用焊丝	Φ0.8-1.0-1.2-1.6,5.5	米	Liner , For Wire	Φ0.8-1.0-1.2-1.6,5.5M




Compatible Parts For OTC
兼容配件适用于欧地希



送丝软管, 适用焊丝	Φ0.8-1.0-1.2-1.6,3.5	米	Liner , For Wire	Φ0.8-1.0-1.2-1.6,3.5M
送丝软管, 适用焊丝	Φ0.8-1.0-1.2-1.6,5.5	米	Liner , For Wire	Φ0.8-1.0-1.2-1.6,5.5M



Compatible Parts For Lincoln
兼容配件适用于林肯



送丝软管, 适用焊丝	Φ0.8-1.0-1.2-1.6,3.5	米	Liner , For Wire	Φ0.8-1.0-1.2-1.6,3.5M
送丝软管, 适用焊丝	Φ0.8-1.0-1.2-1.6,5.5	米	Liner , For Wire	Φ0.8-1.0-1.2-1.6,5.5M



Compatible Parts For Miller
兼容配件适用于米勒




送丝软管, 适用焊丝	Φ0.8-1.0-1.2-1.6,3.5	米	Liner , For Wire	Φ0.8-1.0-1.2-1.6,3.5M
送丝软管, 适用焊丝	Φ0.8-1.0-1.2-1.6,5.5	米	Liner , For Wire	Φ0.8-1.0-1.2-1.6,5.5M

Liner
送丝软管




Compatible Parts For Miller
兼容配件适用于米勒



送丝软管, 适用焊丝	Φ0.8-1.0-1.2-1.6,3.5	米	Liner , For Wire	Φ0.8-1.0-1.2-1.6,3.5M
送丝软管, 适用焊丝	Φ0.8-1.0-1.2-1.6,5.5	米	Liner , For Wire	Φ0.8-1.0-1.2-1.6,5.5M



Compatible Parts For Kemppi
兼容配件适用于肯比



送丝软管, 适用焊丝	Φ0.8-1.0-1.2-1.6,3.5	米	Liner , For Wire	Φ0.8-1.0-1.2-1.6,3.5M
送丝软管, 适用焊丝	Φ0.8-1.0-1.2-1.6,5.5	米	Liner , For Wire	Φ0.8-1.0-1.2-1.6,5.5M



Compatible Parts For ESAB
兼容配件适用于伊萨



送丝软管, 适用焊丝	Φ0.8-1.0-1.2-1.6,3.5	米	Liner , For Wire	Φ0.8-1.0-1.2-1.6,3.5M
送丝软管, 适用焊丝	Φ0.8-1.0-1.2-1.6,5.5	米	Liner , For Wire	Φ0.8-1.0-1.2-1.6,5.5M

Teflon Liners
特氟龙送丝管



蓝色送丝软管 1.5/4.0 , 适用焊丝 Φ0.8-1.0 , 3米	Blue Liner 1.5/4.0, For Wire Φ0.8-1.0 , 3M
蓝色送丝软管 1.5/4.0 , 适用焊丝 Φ0.8-1.0 , 5米	Blue Liner 1.5/4.0, For Wire Φ0.8-1.0 , 5M
红色送丝软管 2.0/4.0 , 适用焊丝 Φ1.0-1.2 , 3米	Red Liner 2.0/4.0, For Wire Φ1.0-1.2 , 3M
红色送丝软管 2.0/4.0 , 适用焊丝 Φ1.0-1.2 , 5米	Red Liner 2.0/4.0, For Wire Φ1.0-1.2 , 5M
黄色送丝软管 2.7/4.7 , 适用焊丝 Φ1.6 , 3米	Yellow Liner 2.7/4.7, For Wire Φ1.6 , 3M
黄色送丝软管 2.7/4.7 , 适用焊丝 Φ1.6 , 5米	Yellow Liner 2.7/4.7, For Wire Φ1.6 , 5M

Welding Liner (For Aluminum)
石墨送丝管 (铝焊丝专用)



石墨送丝管 2.0/4.0,3 米	Welding Liner 2.0/4.0,3M
石墨送丝管 2.7/4.7,5 米	Welding Liner 2.7/4.7,5M

Submerged Arc Welding Liner
埋弧焊送丝管

We can provide various specification liners according to customer's need
我们可根据顾客的需求提供各种规格的优质送丝管

机器人送丝管，适用于松下 Robot Welding Liner , Used For Panasonic



机器人送丝管，适用于 OTC Robot Welding Liner , Used For OTC



MHH02



MHH03



Submerged Arc Welding Liner
埋弧焊送丝管

We can provide various specification liners according to customer's need
我们可根据顾客的需求提供各种规格的优质送丝管



MHH04



MHH05



MHH06



MHH07



MHH08



Submerged Arc Welding Liner
埋弧焊送丝管

We can provide various specification liners according to customer's need
我们可根据顾客的需求提供各种规格的优质送丝管



ROBOT BARRELED WIRE COVER
机器人桶装焊丝罩



全透明 / 使用方便 / 采用进口材料 / 厚实耐用 / 抗摔耐磨
Transparent/ Convenient to use / Adoption imported material/Thick and durable/ Anti-broken and abrasion resistant



机器人桶装焊丝罩 350kg	机器人桶装焊丝罩 250kg
ROBOT BARRELED WIRE COVER 350kg	ROBOT BARRELED WIRE COVER 250kg

Robot Welding torch
机器人焊枪

适用于AW5000
Compatible arts For AW5000



技术参数 Technical Data			易损件 Wear Parts	
冷却方式 Cooling Method	液冷 Liquid Cooling		NO.	Description
额定值 (电流) Rating	500A		1	喷嘴 Nozzle
焊丝直径 Wire Size	0.8-1.6		2	分流器 Gas Diffuser
枪颈角度 Swan Neck Angle	0° 22° 45°		3	导电嘴 Contact Tip
暂载率 Duty Cycle	100%		4	前接头 Tip Holder
			5	绝缘环 Insulation Ring
			6	固定圈 Fixed Ring

Robot Welding torch
机器人焊枪

适用于2500W/5000W
Compatible arts For 2500W/5000W



技术参数 Technical Data			易损件 Wear Parts	
冷却方式 Cooling Method	液冷 Liquid Cooling		NO.	Description
额定值 (电流) Rating	500A		1	喷嘴 Nozzle
焊丝直径 Wire Size	0.8-1.6		2	分流器 Gas Diffuser
枪颈角度 Swan Neck Angle	0° 22° 45°		3	导电嘴 Contact Tip
暂载率 Duty Cycle	100%		4	前接头 Tip Holder
			5	绝缘环 Insulation Ring
			6	固定圈 Fixed Ring

适用于280W
Compatible arts For 280W



技术参数 Technical Data			易损件 Wear Parts	
冷却方式 Cooling Method	液冷 Liquid Cooling		NO.	Description
额定值 (电流) Rating	280A		1	喷嘴 Nozzle
焊丝直径 Wire Size	0.8-1.2		2	导电嘴 Contact Tip
枪颈角度 Swan Neck Angle	0° 22° 36° 45°		3	分流器 Gas Diffuser
暂载率 Duty Cycle	100%		4	前接头 Tip Holder

适用于160W
Compatible arts For 160W



技术参数 Technical Data			易损件 Wear Parts	
冷却方式 Cooling Method	液冷 Liquid Cooling		NO.	Description
额定值 (电流) Rating	160A		1	喷嘴 Nozzle
焊丝直径 Wire Size	0.8-1.2		2	导电嘴 Contact Tip
枪颈角度 Swan Neck Angle	0° 22° 36°		3	前接头 Tip Holder
暂载率 Duty Cycle	100%		4	绝缘环 Insulation Ring

Robot Welding torch
机器人焊枪

适用于熔焊
Compatible arts For Braze



技术参数 Technical Data		易损件 Wear Parts	
冷却方式 Cooling Method	液冷 Liquid Cooling	NO.	Description
额定值 (电流) Rating	500A	1	喷嘴 Nozzle
焊丝直径 Wire Size	0.8-1.6	2	导电嘴 Contact Tip
枪颈角度 Swan Neck Angle	0° 22° 30° 45°	3	分流器 Gas Diffuser
暂载率 Duty Cycle	100%	4	前接头 Tip Holder
		5	水套 Water Jacket

Robot Welding torch
机器人焊枪

适用于70G
Compatible arts For70G



技术参数 Technical Data		易损件 Wear Parts	
冷却方式 Cooling Method	气冷 Air Cooling	NO.	Description
额定值 (电流) Rating	300A	1	喷嘴 Nozzle
焊丝直径 Wire Size	0.8-1.6	2	绝缘环 Insulation Ring
枪颈角度 Swan Neck Angle	0° 22° 36° 45°	3	分流器 Gas Diffuser
暂载率 Duty Cycle	60%	4	导电嘴 Contact Tip
		5	前接头 Tip Holder
		6	固定座 Fixed Base

适用于42G/42W
Compatible arts For42G/42W



技术参数 Technical Data		易损件 Wear Parts	
冷却方式 Cooling Method	液/气冷 Liquid/Air Cooling	NO.	Description
额定值 (电流) Rating	300A	1	喷嘴 Nozzle
焊丝直径 Wire Size	0.8-1.6	2	导电嘴 Contact Tip
枪颈角度 Swan Neck Angle	0° 22° 36° 45°	3	前接头 AB Tip Holder AB
暂载率 Duty Cycle	60%/100%	4	绝缘环 Insulation Ring

适用于6G
Compatible arts For6G



技术参数 Technical Data		易损件 Wear Parts	
冷却方式 Cooling Method	气冷 Air Cooling	NO.	Description
额定值 (电流) Rating	300A	1	喷嘴 Nozzle
焊丝直径 Wire Size	0.8-1.6	2	导电嘴 Contact Tip
枪颈角度 Swan Neck Angle	0° 22° 36° 45°	3	分流器 Gas Diffuser
暂载率 Duty Cycle	60%	4	前接头 Tip Holder
		5	绝缘环 Insulation Ring

Robot Welding torch
机器人焊枪

适用于81W
Compatible arts For 81W



技术参数 Technical Data		易损件 Wear Parts	
冷却方式 Cooling Method	液冷 Liquid Cooling	NO.	Description
额定值 (电流) Rating	600A	1	喷嘴 AB NozzleAB
焊丝直径 Wire Size	0.8-2.4	2	导电嘴 AB Contact TipAB
枪颈角度 Swan Neck Angle	0° 22 ° 36 °45 °	3	分流器 AB Gas DiffuserAB
暂载率 Duty Cycle	100%	4	前接头 AB Tip HolderAB
		5	固定座 Fixed Base
		6	水分流器 Water Diffuser

Robot Welding torch
机器人焊枪

适用于150W
Compatible arts For 150W



技术参数 Technical Data		易损件 Wear Parts	
冷却方式 Cooling Method	液冷 Liquid Cooling	NO.	Description
额定值 (电流) Rating	150A	1	喷嘴 Nozzle
焊丝直径 Wire Size	0.8-1.2	2	导电嘴 Contact Tip
枪颈角度 Swan Neck Angle	0° 22 ° 36 °	3	前接头 Tip Holder

适用于82W
Compatible arts For 82W



技术参数 Technical Data		易损件 Wear Parts	
冷却方式 Cooling Method	液冷 Liquid Cooling	NO.	Description
额定值 (电流) Rating	600A	1	喷嘴 AB NozzleAB
焊丝直径 Wire Size	0.8-1.6	2	导电嘴 AB Contact TipAB
枪颈角度 Swan Neck Angle	0° 22 ° 36 ° 45 °	3	前接头 AB Tip HolderAB
暂载率 Duty Cycle	100%	4	分流器 AB Gas DiffuserAB
		5	固定座 Fixed Base
		6	水分流器 Water Diffuser

适用于DINSE35
Compatible arts For DINSE35



技术参数 Technical Data		易损件 Wear Parts	
冷却方式 Cooling Method	气冷 Air Cooling	NO.	Description
额定值 (电流) Rating	300A	1	喷嘴 Nozzle
焊丝直径 Wire Size	0.8-1.6	2	导电嘴 Contact Tip
枪颈角度 Swan Neck Angle	0° 22 ° 30 °45 °	3	前接头 Tip Holder
暂载率 Duty Cycle	60%	4	绝缘环 Insulation Ring

Robot Welding torch
机器人焊枪

适用于DINSE57
Compatible arts For DINSE57



技术参数 Technical Data		易损件 Wear Parts	
冷却方式 Cooling Method	液冷 Liquid Cooling	NO.	Description
额定值 (电流) Rating	500A	1	喷嘴 Nozzle
焊丝直径 Wire Size	1.0-1.6	2	导电嘴 AB Contact TipAB
枪颈角度 Swan Neck Angle	0° 22 ° 30 ° 45 °	3	前接头 AB Tip HolderAB
暂载率 Duty Cycle	100%		

Robot Welding torch
机器人焊枪

适用于SKS
Compatible arts For SKS




技术参数 Technical Data		易损件 Wear Parts	
冷却方式 Cooling Method	气冷 Air Cooling	NO.	Description
额定值 (电流) Rating	300A	1	喷嘴 Nozzle
焊丝直径 Wire Size	0.8-1.2	2	导电嘴 AB Contact TipAB
枪颈角度 Swan Neck Angle	0° 22 ° 45 °	3	前接头 AB Tip HolderAB
暂载率 Duty Cycle	60%	4	绝缘环 Insulation Ring



适用于DINSE59
Compatible arts For DINSE59

技术参数 Technical Data		易损件 Wear Parts	
冷却方式 Cooling Method	液冷 Liquid Cooling	NO.	Description
额定值 (电流) Rating	450A	1	喷嘴 Nozzle
焊丝直径 Wire Size	1.0-1.2	2	导电嘴 Contact Tip
枪颈角度 Swan Neck Angle	0° 22 ° 30 ° 45 °	3	分流器 Gas Diffuser
暂载率 Duty Cycle	100%		

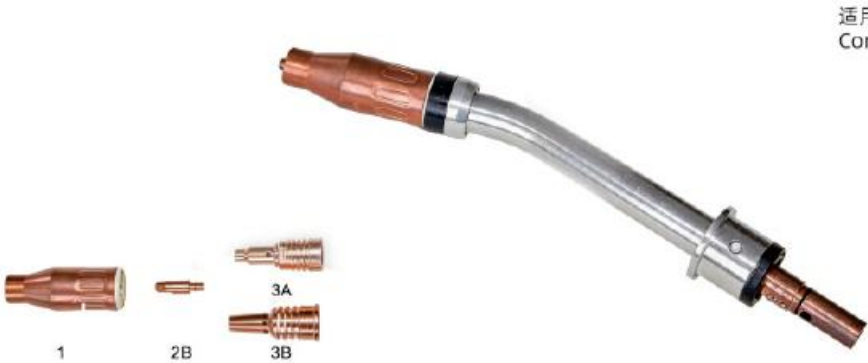

适用于特雷克斯
Compatible arts For Terex

技术参数 Technical Data		易损件 Wear Parts	
冷却方式 Cooling Method	气冷 Air Cooling	NO.	Description
额定值 (电流) Rating	300A	1	喷嘴 Nozzle
焊丝直径 Wire Size	0.8-1.2	2	导电嘴 Contact Tip
枪颈角度 Swan Neck Angle	0° 22 ° 45 °	3	前接头 AB Tip HolderAB
暂载率 Duty Cycle	60%		

Robot Welding torch
机器人焊枪

适用于A360
Compatible arts For A360



技术参数 Technical Data		易损件 Wear Parts	
冷却方式 Cooling Method	气冷 Air Cooling	NO.	Description
额定值 (电流) Rating	300A	1	喷嘴 Nozzle
焊丝直径 Wire Size	0.8-1.4	2	导电嘴 Contact Tip
枪颈角度 Swan Neck Angle	0° 22° 35° 45°	3	前接头 Tip Holder
暂载率 Duty Cycle	60%		

Robot Welding torch
机器人焊枪

适用于350T
Compatible arts For 350T



技术参数 Technical Data		易损件 Wear Parts	
冷却方式 Cooling Method	气冷 Air Cooling	NO.	Description
额定值 (电流) Rating	350A	1	喷嘴 Nozzle
焊丝直径 Wire Size	0.8-1.4	2	分流器 Gas Diffuser
枪颈角度 Swan Neck Angle	0° 35° 45°	3	导电嘴 Contact Tip
暂载率 Duty Cycle	60%	4	前接头 Tip Holder
		5	绝缘环 Insulation Ring

适用于A500
Compatible arts ForA500



技术参数 Technical Data		易损件 Wear Parts	
冷却方式 Cooling Method	气冷 Air Cooling	NO.	Description
额定值 (电流) Rating	500A	1	喷嘴 Nozzle
焊丝直径 Wire Size	0.8-1.6	2	导电嘴 Contact Tip
枪颈角度 Swan Neck Angle	0° 22° 35° 45°	3	前接头 Tip Holder
暂载率 Duty Cycle	60%		

适用于500W
Compatible arts For 500W



技术参数 Technical Data		易损件 Wear Parts	
冷却方式 Cooling Method	液冷 Liquid Cooling	NO.	Description
额定值 (电流) Rating	500A	1	喷嘴 Nozzle
焊丝直径 Wire Size	1.2-1.6	2	导电嘴 Contact Tip
枪颈角度 Swan Neck Angle	0° 31° 35° 45°	3	前接头 Tip Holder
暂载率 Duty Cycle	100%	4	分流器 Gas Diffuser
		5	固定座 Fixed Base
		6	水分流器 Water Diffuser
		7	锁帽 Lack Cap

Robot Welding torch
机器人焊枪



适用于1GM
Compatible arts For1GM

技术参数 Technical Data		易损件 Wear Parts	
冷却方式 Cooling Method	液冷 Liquid Cooling	NO.	Description
额定值（电流） Rating	500A	1	喷嘴 Nozzle
焊丝直径 Wire Size	0.8-1.6	2	导电嘴 Contact Tip
枪颈角度 Swan Neck Angle	固定式	3	分流器 Gas Diffuser
暂载率 Duty Cycle	100%	4	前接头 Tip Holder
		5	绝缘座 Insulation Block



适用于TWIN
Compatible arts ForTWIN

技术参数 Technical Data		易损件 Wear Parts	
冷却方式 Cooling Method	液冷 Liquid Cooling	NO.	Description
额定值（电流） Rating	280A	1	固定螺丝 Fixed Screw
焊丝直径 Wire Size	0.8-1.2	2	喷嘴 Nozzle
枪颈角度 Swan Neck Angle	0° 22° 36° 45°	3	导电嘴 Contact Tip
暂载率 Duty Cycle	100%	4	分流器 Gas Diffuser
		5	前接头 Tip Holder
		6	绝缘座 Insulation Block

Robot Welding torch
机器人焊枪



机器人焊枪，适用于 OTC

Robot Welding Torch For OTC

安川机器人焊枪

Yaskawa Robot Welding Torch



机器人焊枪，适用于松下

Robot Welding Torch For Panasonic

机器人焊枪适用于南韩

Robot Welding Torch For South Korea

Robot Welding torch
机器人焊枪




NO.	描述	Description
1	喷嘴	Nozzle
2	喷嘴锁母	Small Nut
3	锁母	Big Nut
4	导电嘴	Contact Tip
5	连接杆	Contact Tip Holder
6	垫圈	Distance Ring
7	胶圈	O Ring
8	分水环	Water Distributor
9	分流器	Gas Diffuser

机器人配件 Robot Welding Spare Parts
喷嘴 Nozzle



Plug Socket And Coupler Series For Welding Machine
电焊机用插头、插座耦合器系列

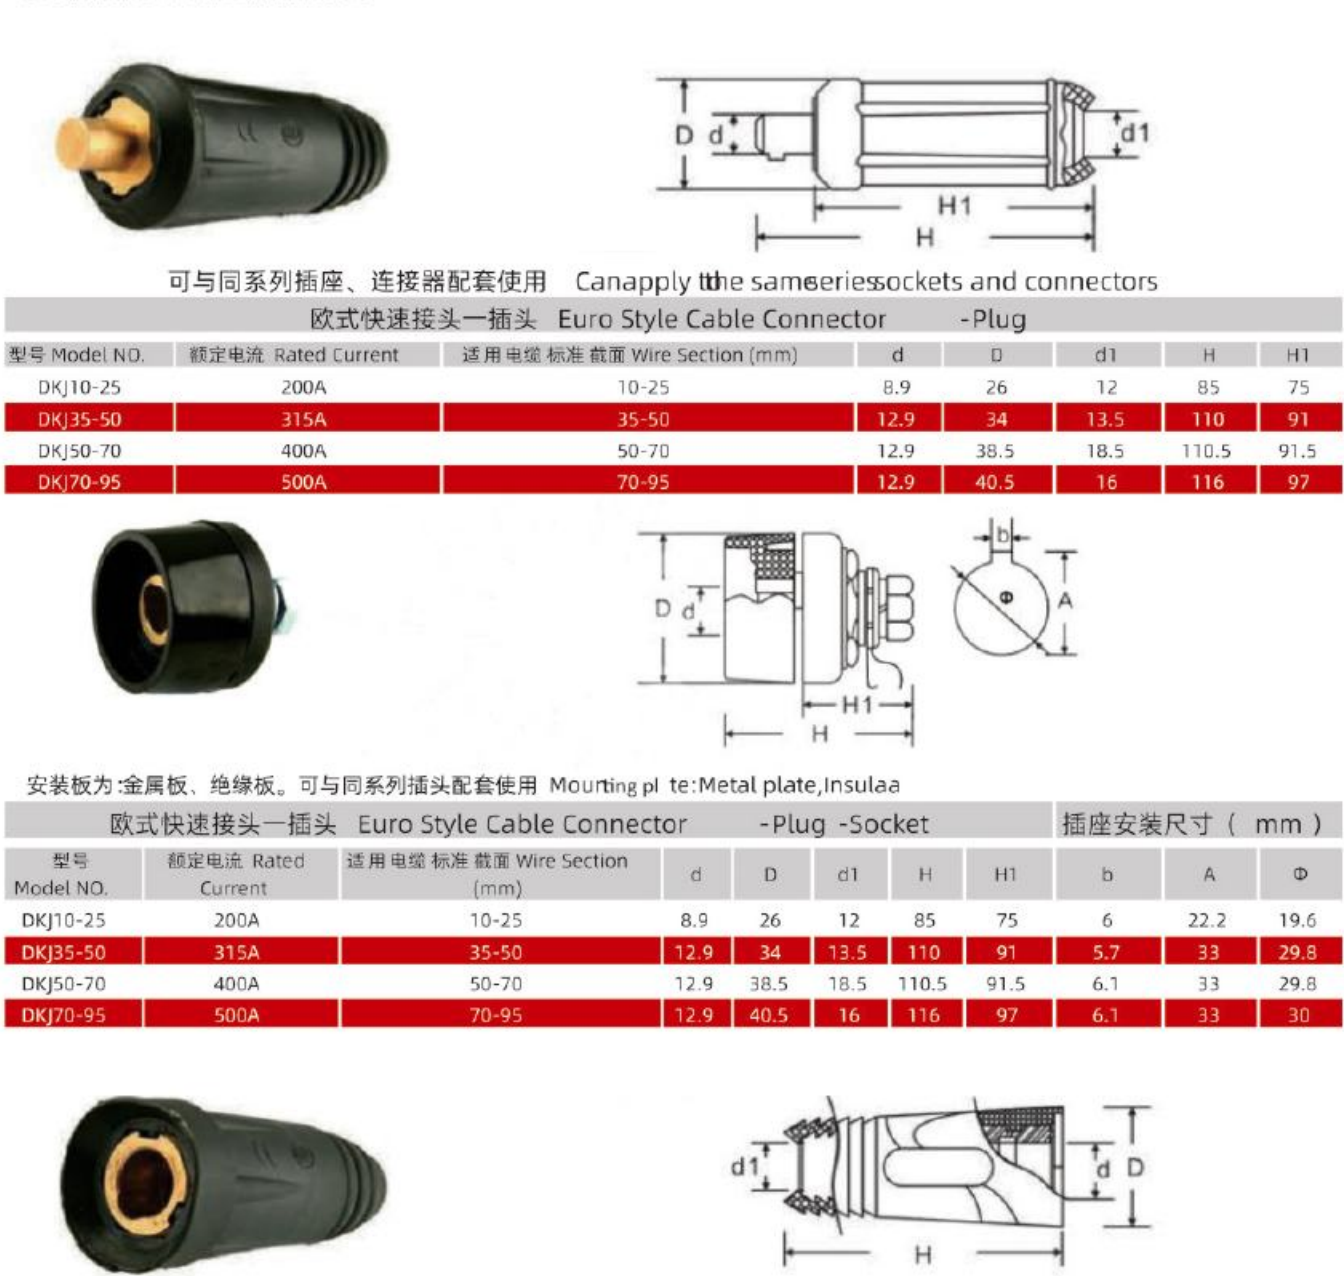

可与同系列插座、连接器配套使用 Can apply the same series sockets and connectors

欧式快速接头一插头 Euro Style Cable Connector -Plug								
型号 Model NO.	额定电流 Rated Current	适用电缆 标准 截面 Wire Section (mm)	d	D	d1	H	H1	
DKJ10-25	200A	10-25	8.9	26	12	85	75	
DKJ35-50	315A	35-50	12.9	34	13.5	110	91	
DKJ50-70	400A	50-70	12.9	38.5	18.5	110.5	91.5	
DKJ70-95	500A	70-95	12.9	40.5	16	116	97	

安装板为:金属板、绝缘板。可与同系列插头配套使用 Mounting plate: Metal plate, Insulating plate

欧式快速接头一插座 Euro Style Cable Connector -Plug -Socket										
型号 Model NO.	额定电流 Rated Current	适用电缆 标准 截面 Wire Section (mm)	d	D	d1	H	H1	b	A	Φ
DKJ10-25	200A	10-25	8.9	26	12	85	75	6	22.2	19.6
DKJ35-50	315A	35-50	12.9	34	13.5	110	91	5.7	33	29.8
DKJ50-70	400A	50-70	12.9	38.5	18.5	110.5	91.5	6.1	33	29.8
DKJ70-95	500A	70-95	12.9	40.5	16	116	97	6.1	33	30

可与同系列插头配套使用 Can apply to the same series plug

欧式快速接头一插头 Euro Style Cable Connector -Plug							
型号 Model NO.	额定电流 Rated Current	适用电缆 标准 截面 Wire Section (mm)	d	D	d1	H	
DKJ10-25	200A	10-25	9	26	9	72	
DKJ35-50	315A	35-50	13.1	35.5	12.5	87	
DKJ50-70	400A	50-70	13.1	35.5	12.5	87	
DKJ70-95	500A	70-95	13.1	40.5	15	105	

Plug Socket And Coupler Series For Welding Machine
电焊机用插头、插座耦合器系列



安装板为:金属板、绝缘板。可与同系列插头配套使用 Mounting plate: Metal plate, Insulating plate. Can apply to the same series plugs

欧式快速接头一后板式插座 Euro Style Cable Connector -Back Plate Socket										
型号 Model NO.	额定电流 Rated Current	适用电缆 标准 截面 Wire Section (mm)	d	D	D1	A	&	b	A	Φ
DKJ10-25	200A	10-25	9	M6	M14	10	0.8-1.5	6	22.2	19.6
DKJ35-50	315A	35-50	13.1	M6	M20	9.9	1-4	5.7	33	29.8
DKJ50-70	400A	50-70	13.1	M6	M20	9.9	1-4	6.1	33	29.8
DKJ70-95	500A	70-95	13.1	M6	M24	9.9	1-4	6.1	33	30


安装板为:金属板、绝缘板。 Mounting plate: Metal plate, Insulating plate.

欧式快速接头一前板式插座 Euro Style Cable Connector -Front Plate Socket										
型号 Model NO.	额定电流 Rated Current	适用电缆 标准 截面 Wire Section (mm)	d	D	&	H1	H	b	A	Φ
DKJ10-25	200A	10-25	10.5	26.5	0.8-1.5	20	51	6	22.2	19.6
DKJ35-50	315A	35-50	12.5	33	1-4	26.5	75	5.7	33	29.8
DKJ50-70	400A	50-70	12.5	39	1-4	32.5	80	6.1	33	29.8
DKJ70-95	500A	70-95	12.5	40.5	1-4	33.5	83	6.1	33	30

可与同系列插座、连接器配套使用 Can apply to the same series sockets and connectors


欧式快速接头一插头 Euro Style Cable Connector -Plug							
型号 Model NO.	额定电流 Rated Current	适用电缆 标准 截面 Wire Section (mm)	d	D	d1	H	
DKJ16	200A	10-25	7.8	31	14.8	78.5	
DKJ35	250A	25-35	10.8	36	13	106	
DKJ50	315A	35-50	12.85	39	15	120	
DKJ70	400A	50-70	12.8	41	18	124	
DKJ95	500A	70-95	12.8	44	20	129	

Plug Socket And Coupler Series For Welding Machine
电焊机用插头、插座耦合器系列

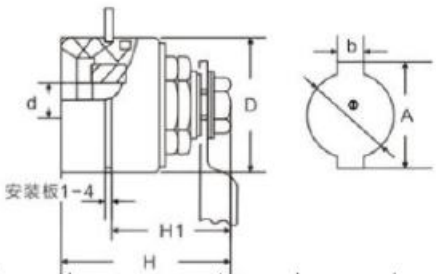


可与同系列插座、连接器配套使用 Can apply to the same series sockets and connectors

中式快速接头—插座 Chinese Style Cable Connector -Socket			插座安装尺寸 (mm)							
型号 Model NO.	额定电流 Rated Current	适用电缆 标准 截面 Wire Section (mm)	d	D	H	H1	b	A	Φ	
DKJ16	200A	10-25	8.2	32	45	32	4.7	28	25.8	
DKJ35	250A	25-35	11.1	38.7	45	32	5	34.7	32.3	
DKJ50	315A	35-50	13.1	40.8	52	40	5	36.2	32.3	
DKJ70	400A	50-70	13.1	42	54	40.5	5.2	35.3	34.3	
DKJ95	500A	70-95	13.1	4	56.5	44.3	5.9	40.3	34.3	

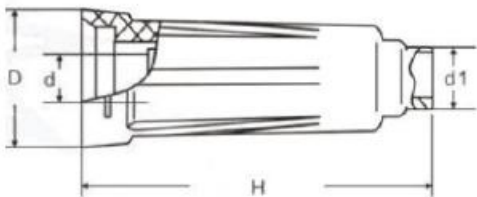

可与同系列中式快速接头插头配套使用 Can apply to the same series of domestic connectors and plugs

中式电缆连接器—插座 Chinese Style Cable Connector -Socket							
型号 Model NO.	额定电流 Rated Current	适用电缆 标准 截面 Wire Section (mm)	d	D	d1	H	
DKJ35	250A	25-35	11	37	16	95	
DKJ50	315A	35-50	13	37	16	110	
DKJ70	400A	50-70	13	41	18	120	
DKJ95	500A	70-95	13	43	20	120	

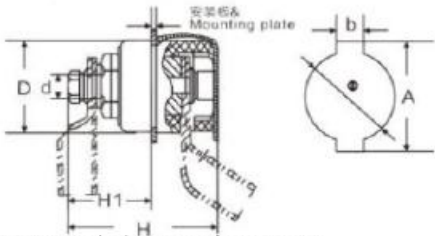

安装板为:金属板、绝缘板。Mounting plate: Metal plate, Insulating plate.

装配式电缆插座 Assembly Cable Socket			插座安装尺寸 (mm)							
型号 Model NO.	额定电流 Rated Current	适用电缆 标准 截面 Wire Section (mm)	d	D	Φ	H1	H	b	A	Φ
EDZ16b	200A	10-25	M8	37	58	30	1-4	5	28	25.8
EDZ50b	315A	25-50	M10	43	71	35	1-4	5.5	37	32.7
EDZ95b	500A	70-95	M10	45	70	34	1-4	6.7	38.5	34.5
EDZ120b	630A	120	M10	49.5	78	42	1-4	5.8	45	39.7

Electric Welding Series
电焊钳系列



P/N 。	DHQ-2017	P/N 。	DHQ-2018	P/N 。	DHQ-2019
Name	Holland 荷兰式 300A	Name	Holland 荷兰式 500A	Name	Holland 荷兰式 600A
Size	46 * 45 * 29.5cm	Size	46 * 45 * 29.5cm	Size	47 * 35 * 21cm



P/N 。	DHQ-2020	P/N 。	DHQ-2021	P/N 。	DHQ-2022
Name	Holland 荷兰式 500A	Name	Korean 韩式 300A	Name	Korean 韩式 500A
Size	46 * 32 * 18cm	Size	46 * 38 * 25cm	Size	46 * 39 * 27cm



P/N 。	DHQ-2023	P/N 。	DHQ-2024	P/N 。	DHQ-2025
Name	Japanese 日式 500A	Name	Japanese 日式 500A	Name	Japanese 日式 600A
Size	51.5 * 27.5 * 24cm	Size	59.5 * 29.5 * 30cm	Size	51.5 * 28.5 * 24cm

Plug Socket And Coupler Series For Welding Machine
电焊机用插头、插座耦合器系列



P/N 。	DHQ-2026	P/N 。	DHQ-2028	P/N 。	DHQ-2027
Name	Italy 意大利式 200A	Name	American 尖头美式 300A	Name	Italy 意大利式 500A
Size	52 *25 *32cm	Size	45 *26.5 *25.5cm	Size	54 *29 *21cm



P/N 。	DHQ-2029	P/N 。	DHQ-2030	P/N 。	DHQ-2031
Name	American 尖头美式 500A	Name	American 尖头美式 600A	Name	American 圆头美式 300A
Size	44 *30 *22cm	Size	44 *30 *22cm	Size	54 *24 *27cm



P/N 。	DHQ-2032	P/N 。	DHQ-2033	P/N 。	DHQ-2034
Name	American 圆头美式 500A	Name	Light 轻型 300A	Name	Light 轻型 500 A
Size	55 *35.5 *27.5cm	Size	44.5 *43 *26.5cm	Size	44.5 *45 *26.5cm

Earth Clamp
接地夹



P/N 。	JDJ-01	P/N 。	JDJ-02
Name	Holland 荷兰式 300A	Name	Holland 荷兰式 500A



P/N 。	JDJ-03	P/N 。	JDJ-04
Name	American 美式 300A	Name	American 美式 500A



P/N 。	JDJ-05	P/N 。	JDJ-06
Name	American 美式 500A	Name	Total Copper 全铜



P/N 。	JDJ-07	P/N 。	JDJ-08
Name	Total Copper 全铜	Name	Total Copper 全铜

All Kinds Of Parts
各种配件

			
护套管	焊枪外保护套管	护套管	焊丝盘
Rubber House	Canverse Hose	Leather House	Wire Spool
			
焊丝防尘罩	焊丝防尘罩，适用于林肯	焊丝防尘罩	焊咀防堵膏
Dust Provent Cover	Dust Provent Cover Compitable Parts For Lincoln	Dust Provent Cover	Welding Tip Stuff Protective Paste
			
悬臂焊主缆 / 悬臂焊辅缆	CO2 流量计	焊烟吸管	
Cantalever Master/Hypotaxis Cable	CO2 Flowmeter	Welding Smoke Suction	
			
接线柱	接线柱，适用于林肯	接线端子，适用于松下	接线端子 200A
Wire Column	Wire Column Compitable Parts For Lincoln	Wire Column Compitable Parts For Panasonic	Wire Column 200A

Car Special Spot Welding Electrode And Accessories
汽车专用点焊电极及配件

			
Electrode Series 电极帽系	Electrode Cap Series 电极盖系列	Electrode Holder Series 电极座系列	
			
Electrode Stem Series 接杆系列	Straight Electrode Series 直电	Positioning Bolt And Nut Electrode Series 定位螺母螺栓电极系列	
			
Electrode Arm Series 电极臂系列			
			
Other Accessories 其他配件	Balancer 平衡器	Spot Welding Adhesive 点焊胶	Localizer 定位销
Structural Adhesive	Spot Welding Adhesive	Soft Conjunction	软连接